

DTG OR15 OPEN FRONT MULTIDECK





COSSIGA



- Stainless steel construction
- Four adjustable shelves
- Ticket strips on shelves
- Shelf mounted air curtains
- Under shelf and canopy LED lights
- Pull down night blind
- Forced air circulation
- Integral condenser
- Removable front grille panel
- Roll in on castors
- Climate class M1
- Hinged front doors - **optional**



Shown with optional frameless hinged acrylic front doors
sold as accessory kit

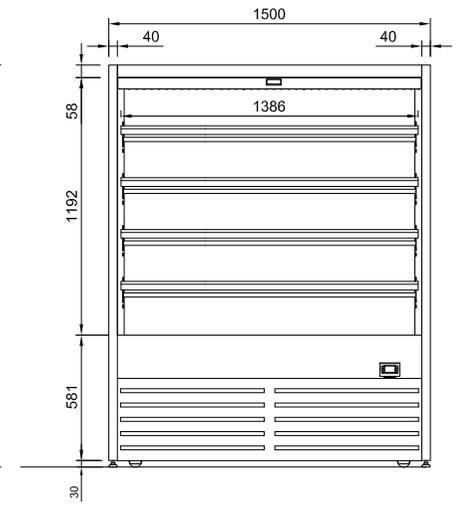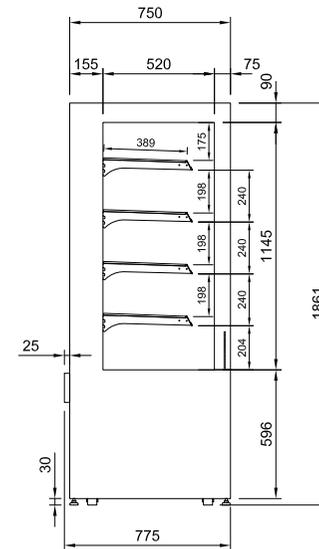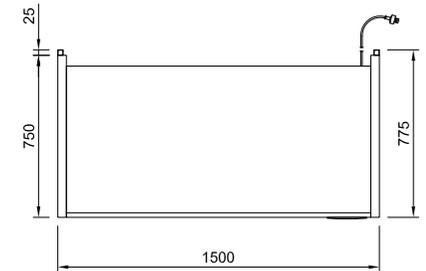

Drainage System Options

- Plastic bottle - manual empty
- Pump to waste
- Electronic evaporator pan

CABINET DIMENSIONS & SPECIFICATIONS

Prior to installation see, installation guidelines, ventilation requirements and drainage options documents

| MODEL | CABINET | | | | SHELVING | OPERATING TEMP | SHELF | BASE TRAY | DISPLAY | REFRIGERANT | FREQUENCY | OPERATING CURRENT | ENERGY CONSUMPTION | CONNECTION | | VOLTAGE | PACKED FOR SHIPPING | | | |
|---------|-------------|------------|-------------|-------------|----------|----------------|------------|------------|---------|-------------|-----------|-------------------|--------------------|------------|------------|----------|---------------------|----------------|---------------|-----|
| | LENGTH [MM] | DEPTH [MM] | HEIGHT [MM] | WEIGHT [KG] | | | | | | | | | | DEG C | W X D | | W X D | M ² | TEMP CLASS M1 | Hz |
| DTGOR15 | 1500 | 775 | 1860 | 298 | 4 + BASE | -1 +5 | 1386 X 386 | 1420 x 453 | 2.78 | R290 | 50/60 HZ | 2.76 / 11.5 | 21.00 | 3 PIN PLUG | 3 PIN PLUG | 220-240V | 1600 | 830 | 2030 | 308 |

Maximum shelf load weight 15kg spread evenly