



# HOSHIZAKI

## ACR-130DG-LR-RRC-C1 U 2-Section Refrigerated Counter

PRODUCT SERIES: ADVANCE  
ITEM NUMBER: 889000861  
COUNTRY OF ORIGIN: TURKEY



Hoshizaki Advance ACR-130DG-LR-RRC-C1 U is a 2-section 1/1 GN refrigerated counter with two doors and a flat worktop. It has a net usable volume of 171 ltr. The height excluding castors is 700mm, castors = H 150mm (C1). Shelf width is 325mm.

- Fan assisted cooling
- Automatic defrost with re-evaporation of defrost water
- Heavy duty cabinet and compressor compartment construction
- Climate class 5 cooling system enduring up to +40°C ambient temperature
- Exterior and interior of stainless steel
- A compact slide out refrigeration unit for maintenance and service
- Removable condenser filter for cleaning or replacement
- Reversible doors
- Anti-tilt shelves
- Removable magnetic door gaskets with triple insulation area
- Pan-shaped inside base with rounded corners to catch fluids
- IP 21 water protection
- Matching design identity as the Advance cabinets



1 / 1 GN

### ACCESSORIES INCLUDED

2 grey shelves per section

### OPTIONAL ACCESSORIES

- Set of legs 130-180 mm (L1)
- Set of legs 135-200 mm (L2)
- Set of 4 Castors for 900mm Counter-top (C2)
- Castor Extension Kit (extends height of castors by 50mm)
- Flat worktop with 100mm splashback
- Shelf support - Left
- Shelf support - Right
- Drawer section with 2 x 1/2 drawers
- Drawer section with 3 x 1/3 drawers \*
- Stainless shelf
- Grey shelf

\* 3 drawer section is not available next to the compressor housing

### WARRANTY PERIOD

5 Years on Parts & Labour

### EXTERIOR

Stainless

### INTERIOR

Stainless

Refrigerant: R290 / Refrigerant (kg): 0.055 / CO2 equivalent (kg): 0.165

### CERTIFICATIONS



Energy Consumption (kWh/Year)	Energy Efficiency Class	Energy Efficiency Class Standard	Energy Efficiency Index EEI
721	B	ISO 22041-2019	32.39



# HOSHIZAKI

## ACR-130DG-LR-RRC-C1 U



### TECHNICAL SPECIFICATIONS

Temperature Range	GN or Tray Size (mm)	Volume, Gross (ltr.)	Net Usable Volume (ltr.)	Power Supply	Connection Load (Watt)	Ref. capacity at -10°C (Watt)	Climate Class	Sound Level – dB(A)
-2/+8°C	1/1 GN	300	171	230V, 50 Hz	160	367	S (max. ambient 40°C w/ 40% RH)	51

### SHIPPING SPECIFICATIONS



Dimensions W x D x H (mm)	Net Weight (kg)	Dimensions, Packed, W x D x H (mm)	Weight, Packed (kg)	Volume Packed (m3)
1314 x 700 x 850 (with castors)	95	1364 x 760 x 1050	110	1.09

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

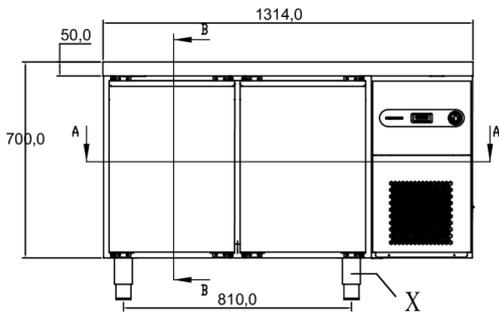

SECTION B-B

SECTION A-A

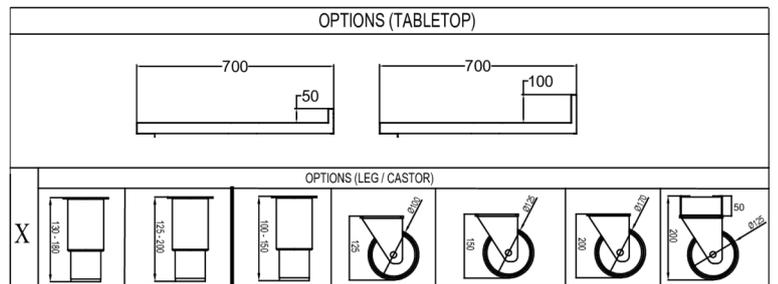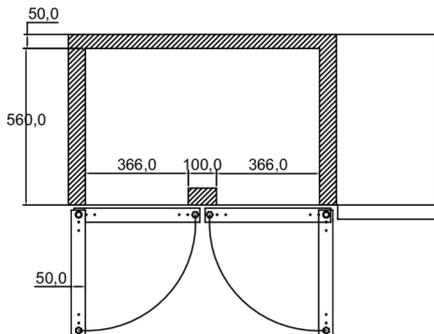

Hoshizaki Belgium  
 Hoshizaki Danmark  
 Hoshizaki Deutschland  
 Hoshizaki France  
 Hoshizaki Iberia  
 Hoshizaki Italia  
 Hoshizaki Middle East

[info@hoshizaki.be](mailto:info@hoshizaki.be)  
[info@hoshizaki.dk](mailto:info@hoshizaki.dk)  
[vertrieb@hoshizaki.de](mailto:vertrieb@hoshizaki.de)  
[info@hoshizaki.fr](mailto:info@hoshizaki.fr)  
[info@hoshizaki.es](mailto:info@hoshizaki.es)  
[commerciale@hoshizaki.it](mailto:commerciale@hoshizaki.it)  
[sales.ex@hoshizaki-europe.com](mailto:sales.ex@hoshizaki-europe.com)

Hoshizaki Netherlands [info@hoshizaki.nl](mailto:info@hoshizaki.nl)  
 Hoshizaki Norge [salg@hoshizaki.no](mailto:salg@hoshizaki.no)  
 Hoshizaki Sverige [orderSE@hoshizaki.dk](mailto:orderSE@hoshizaki.dk)  
 Hoshizaki UK [uksales@hoshizaki.uk](mailto:uksales@hoshizaki.uk)  
 Export countries [sales.ex@hoshizaki-europe.com](mailto:sales.ex@hoshizaki-europe.com)  
 Other countries [sales.ex@hoshizaki-europe.com](mailto:sales.ex@hoshizaki-europe.com)

[www.hoshizaki.uk](http://www.hoshizaki.uk)