

**Plug In  
 SpeedDelight with adjustable tube,  
 ribbed removable teflon plate - EU Plug**

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_


**603909 (HSG2RPRP6)**

SpeedDelight with manual Adjustable Top ribbed Contact Plate, dark grey (UK plug)

### Short Form Specification

**Item No.** \_\_\_\_\_

Lid and top plate constructed in 304 AISI stainless steel and with external high-grade composite material paneling and handle. Possibility to manually adjust the maximum movement of the upper plate. Back cover and side panels in 304 AISI stainless steel and bottom in AISI 430 stainless steel. Ribbed top contact plate (215 x 215 mm) in aluminum with non-stick coating. Can accept snacks from 10 to 75 mm thick. Smooth 4 mm thick quartz glass bottom cooking surface (250 x 250 mm). 2 probes independently control the temperature of the top and bottom plates (100 to 250°C). Automatic lid holding and opening system. Automatic lifting of the lid at the end of the cooking cycle via mechanical spring. Electronic control with digital 4,3" LED display, countdown display and buzzer at the end of the cycle. 800 W heating element on the top plate and 800 W electrical armored heating elements on the top plate. 500W electrical armored heating element on the bottom plate, 1 x 1050 W magnetron for microwaves. Front air inlet and back outlet for efficient cooling ventilation. Ergonomic handle in high-grade composite material for easy movement of the lid. Removable top front panel and dismountable top cooking plate for better cleanability. 8 pre-loaded programs (editable): P1 = 70 sec. (12 sec. MW); P2 = 80 sec. (12 sec. MW); P3 = 70 sec. (25 sec. MW); P4 = 75 sec. (28 sec. MW); P5 = 85 sec. (38 sec. MW); P6 = 90 sec. (30 sec. MW); P7 = 48 sec. (42 sec. MW); P8 = 12 sec. (no MW). With Top temperature = 249°C and bottom temperature = 220°C

### Main Features

- It combines 3 cooking technologies: contact, infrared radiation and microwaves to provide perfectly cooked food, heated to the core.
- Adjusting upper plate to heat food up to a minimum height.
- The Energy Saving Mode automatically switches to stand-by after an amount of time settled by the operator (from 1 to 60 minutes).
- Delivered with USB port and wi-fi connection to optimize workflows allowing local and remote interaction (temperatures, countdowns, warnings).
- Electronic control with digital 4.3" LED display with adjustable brightness.
- Countdown display and buzzer with adjustable volume at the end of the cycle.
- 8 programs selectable on the display. The 8 programs can be adjusted by the user. The programmable parameters are:
  - top plate temperature
  - bottom plate temperature
  - total duration of each cycle
  - duration and distribution of microwaves within each cycle.
- Automatic mechanical lid holding and opening system controlled.
- IPx4 water protection.
- Ergonomic handle for easy movement of the lid.
- Compliant with Regulation (EC) No 1935/2004 and its amendments, Regulation (EC) No 2032/2006 and its amendments.
- 8 pre-loaded programs (editable):
  - P1 = 70 sec. (12 sec. MW)
  - P2 = 80 sec. (12 sec. MW)
  - P3 = 70 sec. (25 sec. MW)
  - P4 = 75 sec. (28 sec. MW)
  - P5 = 85 sec. (38 sec. MW)
  - P6 = 90 sec. (30 sec. MW)
  - P7 = 48 sec. (42 sec. MW)
  - P8 = 12 sec. (no MW).
 With Top temperature = 249° C and bottom temperature = 220° C
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory - contact the Company for more details).

**APPROVAL:** \_\_\_\_\_

### Construction

- 2 temperature probes for an independent control of the top and bottom plate temperature.
- Aluminum ribbed top contact plate (215 x 215 mm) treated with a special non-stick coating.
- Smooth 4 mm thick quartz glass bottom cooking surface (250 x 250 mm).
- Included accessories: brush, spatula, scraper and degreasing liquid.
- Independent temperature setting of the top and bottom plates from 100 to 250 °C.
- Automatic lifting of the lid at the end of the cooking cycle via mechanical spring.
- Lid, back cover and bottom all in AISI 304 S/S.
- Lid covers, handle and side panels in high-grade reinforced composite material.
- Front air inlet and back outlet for efficient cooling ventilation allows easy air filters removal and side by side installation.
- 1 x 1050W magnetrons for microwave.
- 500W electrical armored heating element on the bottom plate.
- 800W electrical armored heating element on the top plate.


### Included Accessories

- |   |            |
|---|------------|
| • 1 of Glass saver for Speedelight                    | PNC 653527 |
| • 1 of Cleaning brush for Speedelight                 | PNC 653623 |
| • 1 of Spatula for Speedelight                        | PNC 653625 |
| • 1 of Special scraper for Speedelight                | PNC 653690 |
| • 1 of 4 rubber feet - Height = 26 mm for Speedelight | PNC 653792 |
| • 1 of 1lt bottle of detergent grease for Speedelight | PNC 653796 |


### Optional Accessories

- |   |                                     |
|---|-------------------------------------|
| • Glass saver for Speedelight                             | PNC 653527 <input type="checkbox"/> |
| • Cleaning brush for Speedelight                          | PNC 653623 <input type="checkbox"/> |
| • Spatula for Speedelight                                 | PNC 653625 <input type="checkbox"/> |
| • Special scraper for Speedelight                         | PNC 653690 <input type="checkbox"/> |
| • Spray bottle (0,5lt) for detergent - Speedelight        | PNC 653695 <input type="checkbox"/> |
| • Removable ribbed teflon plate for Speedelight           | PNC 653787 <input type="checkbox"/> |
| • 4 stainless steel feet - Height = 76 mm for Speedelight | PNC 653791 <input type="checkbox"/> |
| • 4 rubber feet - Height = 40 mm for Speedelight          | PNC 653793 <input type="checkbox"/> |

Front

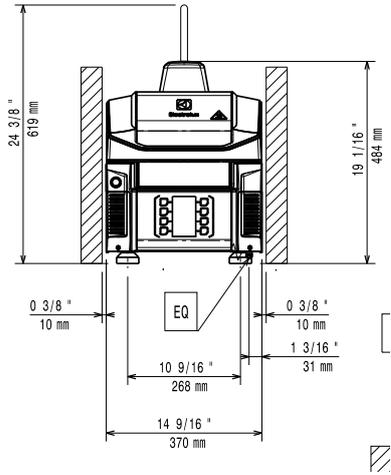


Side

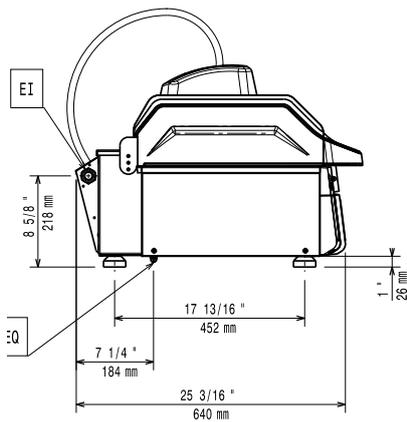

EI = Electrical inlet (power)  
 EO = Electrical Outlet

Top

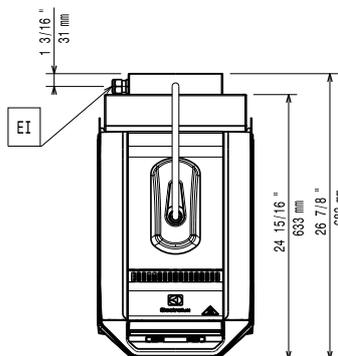

### Electric

Supply voltage:	
603909 (HSG2RPRP6)	220-230 V/1 ph/50 Hz
Rated amps:	12 A
Total Watts:	2.7 kW

### Installation:

Clearance: 190mm from rear vertical panel

### Key Information:

External dimensions, Width:	370 mm
External dimensions, Height:	484 mm
External dimensions, Depth:	686 mm
Net weight:	45.5 kg
Shipping weight:	54 kg
Shipping height:	680 mm
Shipping width:	450 mm
Shipping depth:	780 mm
Shipping volume:	0.24 m <sup>3</sup>