BEVERAGE-AIR

PROJECT: _____

ITEM # _____ QTY: _____

MODEL # _____

AIA # _____ SIS # _____

APPROVED: _____

WORKTOP REFRIGERATORS

Model: WTRD119AHC-8

EIGHT DRAWERS / SIDE-MOUNTED



7 YEAR WARRANTY

Parts, Labor, and Compressor

CABINET CONSTRUCTION

- Stainless steel front, sides, drawers and grille (galvanized back & bottom)
- Interior liner is made of corrosion resistant aluminum
- Stainless steel worktop for added durability
- 4" Removable backsplash for flexibility and ease of cleaning
- Electronic control
- Interior thermometer is standard
- Snap-in drawer gaskets
- Upper and lower pull-out drawers accommodate 6" deep pans
- Stainless steel drawer frames supported on telescoping drawer slides
- Drawer slides include locking mechanism that prevents drawer from being inadvertently pulled off cabinet
- Compressor standard on right side
- 6" Casters, two (2) with brakes standard

OPTIONS & ACCESSORIES

- Stainless steel back
- Stainless steel interior
- Cutting board
- 3" Casters
- 6" Legs (stainless steel, black or seismic/flange)
- Low profile casters
- Roller kit
- Remote option* (see note on back on page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil
- Refrigerators capable of maintaining product temperature between 36°F and 38°F

3779 Champion Blvd., Winston-Salem, NC 27105
888-845-9800 Fax: 336-245-6453
Beverage-Air.com Sales@bevair.com

Please verify qualifying units by visiting:
www.energystar.gov/cfs


Specifications are subject to change without prior notice.

Date Issued 11/26 Printed in U.S.A.


BEVERAGE-AIR

Worktop Refrigerators
Model: WTRD119AHC-8


PLAN VIEW

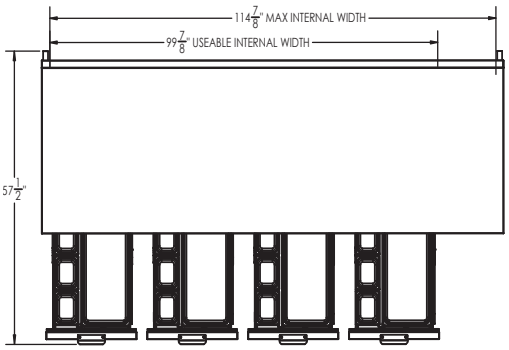

ELEVATION VIEW

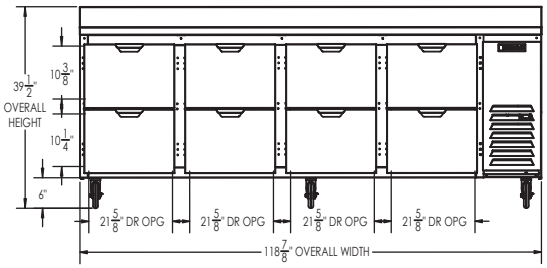

SIDE VIEW



EXTERNAL DIMENSIONAL DATA	
Width Overall (in)	118 7/8”
Depth Overall (in)	35 3/4”
Height Overall (in)	39 1/2”
Number of Drawers	8
Depth with Drawer Extended	57 1/2”
Drawer Openings	21 5/8” x 10 1/4” 21 5/8” x 10 3/8”
INTERNAL DIMENSIONAL DATA	
NET Capacity (cubic ft).	40.12
Internal Width Overall (in)	114 7/8”
Internal Depth Overall (in)	26”
Internal Height Overall (in)	25”

ELECTRICAL CONNECTION

115/601
NEMA 5-15P

Unit pre-wired at factory and include 8’ long cord and plug set.

ELECTRICAL DATA	
Full Load Amps	5.0
Voltage	115/60/1
Nema Plug (8’ cord)	5-15P
REFRIGERATION DATA	
Horsepower	1/3
Capacity (BTU/Hr)	2629
Heat Rejection (BTU/Hr)	3943.5
Charge (lbs/grams/ounces)	0.3086 / 140 / 4.9
SHIPPING DATA	
Gross Weight - Crated	750 lbs.
Height - Crated (in)	38”
Width - Crated (in)	122”
Depth - Crated (in)	33”

*NOTE: Remote units are field wired and come with 6” legs.
Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4”. Metric dimensions (MM).

Required Clearance: 3” Bottom & 2” Rear

3779 Champion Blvd., Winston-Salem, NC 27105 | 888-845-9800 | Fax: 336-245-6453 | Beverage-Air.com | Sales@bevair.com

Date Issued 11/26 | Printed in U.S.A.

WELBILT
an Ali Group Company