

## Culino 150E Combi Jacketed Kettle

Model – Culino Combi 150E (4215220)

### FEATURES

- Culino kettle with mixer
- Electric heated version
- 316 Stainless steel mixing bowl
- Flat panel digital controls
- Food temperature control (option)
- Multifunction timer (option)
- Automatic measured water filling (option)
- Safety grid lid
- Multi-function mixing tool with auto-reverse
- 4 mixing programs
- Electric tilting
- Measuring stick
- Hand shower (option)
- Strainer plate(option)

Please refer to Metos website for options and accessories




### TECHNICAL DATA

Net Volume	150L	Electrical	Power 21.5 kW
Spare Volume	19 L		Voltage 400-415V,
Gross Volume	169 L		3P+N+E 50/60Hz
Dimensions			AMP 40A
Width	1360mm	Total Heat	20kW
Height	1039mm	Load	Latent 1.0kW,
Depth	965mm		Sensible 4.3 kW
Connections		Waste	By kitchen
Water	Cold ø15mm		contractor
	Hot ø10mm	Net Weight	250 kg

NOTE - Mandatory installation kit required for all installations, options are:

- Single kettle surface – 4215839
- Single kettle subsurface – 4215840
- Group kettle surface – 4215843
- Group kettle subsurface - 4215844

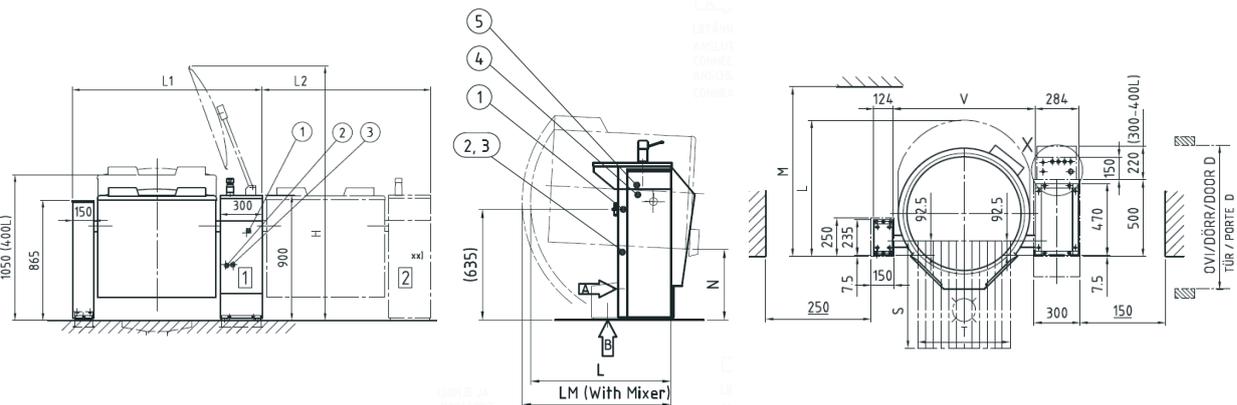

Finland  
metos.com/manufacturing

Metos Oy Ab  
Ahjonkaarre  
FI 04220 Kerava  
Finland  
Telephone +358 204 3913  
international.sales@metos.com

- (1) Electrical connection
- (2) Cold water connection
- (3) Hot water connection
- (4) Data cable (HACCP option)
- (5) Control cables to building for heating control of kettle

Model	L1 mm	L2 mm	M mm	L mm	LM mm	H mm	S mm	T mm	D mm	N mm	V mm
150E	1360	1210	1010	895	910	1980	800	600	945	420	926

Disclaimer: All unit capacities are based on subjective testing.

In line with policy to continually develop and improve its products, Metos Oy Ab reserves the right to change specifications and design without notice.