Project:_____

Location:_____

Item #:_____Quantity:_____

Model #:_____

MODEL: IRR-AN23_2 / IRR-AN49_4
IRR-AN67_6 / IRR-AN23_49_67_BT_49MX

Bottom mounted
Reach-In refrigerators & Freezers



IRR-AN23



IRR-AN49_4



IRR-AN67_6

General Strengths

- ✓ ***Sanitation.*** The interior cabinet is built with rounded corners (extensive radius for easy cleaning). Quick ability to removal of shelves and slides for interior cleaning. Each cabinet has a drain at the bottom of the unit. When cleaning the unit make sure the drain hose is routed to a floor drain.
- ✓ ***Doors.*** Self-closing door system with permanent pressure. Stay open feature included when door remains open after 95 degrees. All doors include triple chamber door gaskets, easy to remove and snap in. Doors are field reversible.
- ✓ ***Control systems.*** Higher precision in managing temperature settings. Greater ability for the adjustment of temperatures ranges as per the end user's requirement.
- ✓ ***100% Tested.*** All condenser units are tested 100%, in helium chambers for refrigerant leak detection
- ✓ ***Certified.*** Audited and Certified by **INTERTEK** for compliance with UL 471 and NSF 7. EQA audited and certified by internationally recognized firm. ISO 9001:2015 (Quality); ISO 14001:2015 (Environmental); ISO 45001:2018 (Prevention and Worker Safety)
- ✓ ***Lighting.*** LED lighting in cabinet sides reduces the energy consumption by 80% and 90% compared to a traditional bulb. Provides a much better light quality.

Review: 01 Date: 05/8/2026IRT-AN23TF

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

INFRICO-North America Corporate División
11200NW 25th St ste 123, Sweetwater. FL, 33172
(305) 777 9599

www.infrico.us
sales@infrico.com
service@infrico.com

Project:_____

Location:_____

Item #:_____Quantity:_____

Model #:_____

MODEL: IRR-AN23_2 / IRR-AN49_4
IRR-AN67_6 / IRR-AN23_49_67_BT_49MX

Bottom mounted
Reach-In refrigerators & Freezers

STANDARD FEATURES

➢ **Exterior**
- AISI 430 Stainless Steel.

➢ **Interior**
- AISI 430 Stainless Steel.
- Sealed interior floors and rounded cabinet corners.
- LED lighting.
- Internal drain plugs for easy cleaning.

➢ **Doors**
- Polyurethane insulated door.
- Self closing door with stay open feature.
- Stainless Steel heavy-duty hinges.
- Triple chamber snap in door gaskets for easy removal and cleaning.
- Field reversible door, parts not included.
- Door lock.
- Full-height door opening:23" x 53" (584 x 1346 mm)

OPTIONAL FEATURES

✓ Extra- dense Wire Shelves
✓ Set of OK 6'' legs, height adjustable from 5" to 8".
✓ Electrical connection is 230V / 1ph / 50 Hz (plug type varies).
✓ Extra universal tray slides
✓ Reinforced wire shelf
✓ Extra plastic-coated wire shelves
✓ IRR-AN23 – 1.24 A
✓ IRR-AN23BT – 3.08 A
✓ IRR-AN23_2 – 1.24 A
✓ IRR-AN49 – 2.49 A
✓ IRR-AN49BT – 4.28 A
✓ IRR-AN49_4 – 2.49 A
✓ IRR-AN67 – 3.09 A
✓ IRR-AN67BT – 8.30 A
✓ IRR-AN67_6 – 3.09 A
✓ IRR-AN49MX – 7.08 A

➢ **Insulation**
- Polyurethane with high density 2,497 lb/ft³, CFCs free, zero ODP and low GWP.

➢ **Shelving**
- (3) Plastic-coated wire shelves per door
- Unviersal tray slides rails per shelf included,
- Dimensions WxD: 20-7/8"x 25-5/8" (530x650 mm)
- Universal tray slides are compatible with 18"x26" (457x660 mm) and 12"x 20" (305x660mm) sheet pans.

➢ Casters
- 4" diameter casters,
- Locks provided on front set.

➢ **Refrigeration**
- Temperature and defrost regulated by a digital controller,
- Evaporative pan,
- Evaporator coil coated with anti-corrosion material,
- Refrigeration capacity:

IRR-AN23: 1512 Btu/h (14ºF) / 443 W (-10ºC).
IRR-AN23BT: 2717 Btu/h (14ºF) / 796 W (-30ºC).
IRR-AN23_2: 1512 Btu/h (14ºF) / 443 W (-10ºC).
IRR-AN49: 2120 Btu/h (14ºF) / 621 W (-10ºC).
IRR-AN49BT: 2949 Btu/h (14ºF) / 864 W (-10ºC).
IRR-AN49_4: 2120 Btu/h (14ºF) / 621 W (-10ºC).
IRR-AN67: 3427 Btu/h (14ºF) / 1.004W (-10ºC).
IRR-AN67BT: 2717 Btu/h (14ºF) / 796 W (-10ºC).
IRR-AN67_6: 3427 Btu/h (14ºF) / 1.004 W (-10ºC).
IRR-AN49MX:
Refrigerator: 1512 Btu/h (14ºF) / 443 W (-10ºC).
Freezer: 2717 Btu/h (-22ºF) / 796 W (-30ºC).

➢ **Electrical**
- Cord and NEMA 5-15P plug,
- Electrical connection is 115 V / 1ph / 60 Hz.
- 20 AMP breakers required



Review: 01 Date: 05/8/2026 IRT-AN

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

INFRICO-North America Corporate División
11200NW 25th St ste 123, Sweetwater. FL, 33172
(305) 777 9599

www.infrico.us
sales@infrico.com
service@infrico.com

Project:_____

Location:_____

Item #:_____Quantity:_____

Model #:_____

MODEL: IRR-AN23_2 / IRR-AN49_4
IRR-AN67_6 / IRR-AN23_49_67_BT_49MX

Bottom mounted
Reach-In refrigerators & Freezers

MODELS	Dimensions (inches) (mm)			Doors	Shelves	Ref.	Ref.Weight (Lbs.) (gr.)	Temperature Range (ºF) (ºC)	Cond. Unit (H.P)	Capacity (Cu.Ft.) (L)	Case Amps 115V	Net weight (Lbs.) (Kg.)
	W	D	H									
IRR-AN23	27-1/16 (687)	31-1/8 (791)	83-3/8 (2117)	1	3	R290	0,22 (100)	33ºF/ 38ºF (0ºC / 3ºC)	1/4	23 (610)	3,55	440 (200)
IRR-AN23BT	27-1/16 (687)	31-1/8 (791)	83-3/8 (2117)	1	3	R290	0,28 (120)	-5ºF/ 0ºF (-18ºC)	1/4	23 (610)	7,75	440 (200)
IRR-AN23_2	27-1/16 (687)	31-1/8 (791)	83-3/8 (2117)	2	3	R290	0,22 (100)	33ºF/ 38ºF (0ºC / 3ºC)	1/4	23 (610)	3,55	440 (200)
IRR-AN49	54-1/2 (1384)	31-1/8 (791)	83-3/8 (2117))	2	6	R290	0,28 (130)	33ºF/ 38ºF (0ºC / 3ºC)	1/3	49 (1350)	4,81	600 (272)
IRR-AN49BT	54-1/2 (1384)	31-1/8 (791)	83-3/8 (2117))	2	6	R290	0,30 (140)	-5ºF/ 0ºF (-18ºC)	1/3	49 (1350)	8,19	600 (272)
IRR-AN49_4	54-1/2 (1384)	31-1/8 (791)	83-3/8 (2117)	4	6	R290	0,28 (120)	33ºF/ 38ºF (0ºC / 3ºC)	1/3	49 (1350)	4,81	600 (272)
IRR-AN67	82 (687)	31-1/8 (791)	83-3/8 (2117)	3	9	R290	0,33 (150)	33ºF/ 38ºF (0ºC / 3ºC)	1/2	67 (1886)	7,76	900 (408)
IRR-AN67BT	82 (687)	31-1/8 (791)	83-3/8 (2117)	3	9	R290	2 X 0,22 (2X100)	-5ºF/ 0ºF (-18ºC)	1/2	67 (1886)	12,49	900 (408)
IRR-AN67_6	82 (687)	31-1/8 (791)	83-3/8 (2117)	6	9	R290	0,33 (150)	33ºF/ 38ºF (0ºC / 3ºC)	1/2	67 (1886)	7,76	900 (408)
IRR-AN49MX (DUAL TEMP)	54-1/2 (687)	31-1/8 (791)	83-3/8 (2117)	2	6	R290	0,24 (110) 0,24 (110)	33ºF/ 38ºF (0ºC / 3ºC) -5ºF/ 0ºF (-18ºC)	1/4 3/4	23+23 (610+610)	11,12	700 (318)

Review: 01 Date: 05/8/2026 IRT-AN

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

INFRICO-North America Corporate Division
11200NW 25th St ste 123, Sweetwater. FL, 33172
(305) 777 9599

www.infrico.us
sales@infrico.com
service@infrico.com

Project:_____

Location:_____


Item #:_____Quantity:_____

Model #:_____

MODEL: IRR-AN23_2 / IRR-AN49_4
IRR-AN67_6 / IRR-AN23_49_67_BT_49MX


Bottom mounted
Reach-In refrigerators & Freezers

ELEVATION

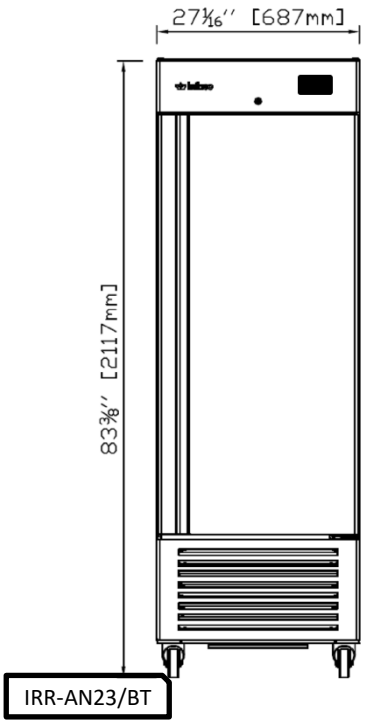


IRR-AN23/BT


RIGHT VIEW

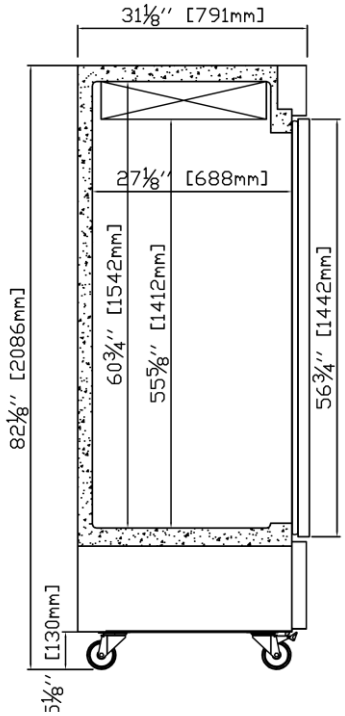

PLAN VIEW

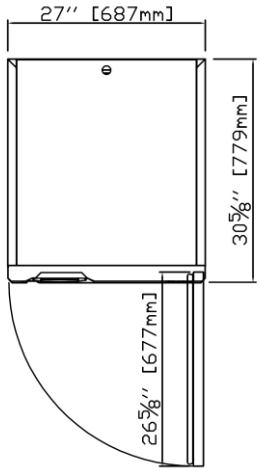


ELEVATION

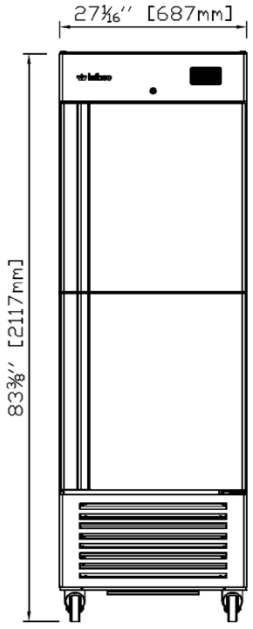


IRR-AN23_2

RIGHT VIEW

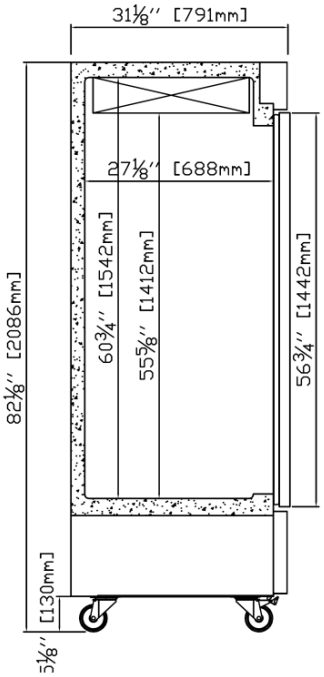

PLAN VIEW

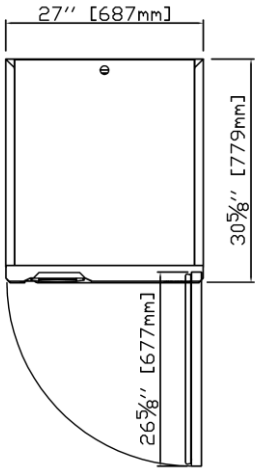

Review: 01 Date: 05/8/2026 IRT-AN

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

INFRICO-North America Corporate División
11200NW 25th St ste 123, Sweetwater. FL, 33172
(305) 777 9599

www.infrico.us
sales@infrico.com
service@infrico.com

Project:_____

Location:_____


Item #:_____Quantity:_____

Model #:_____


MODEL: IRR-AN23_2 / IRR-AN49_4
IRR-AN67_6 / IRR-AN23_49_67_BT_49MX

Bottom mounted
Reach-In refrigerators & Freezers


ELEVATION

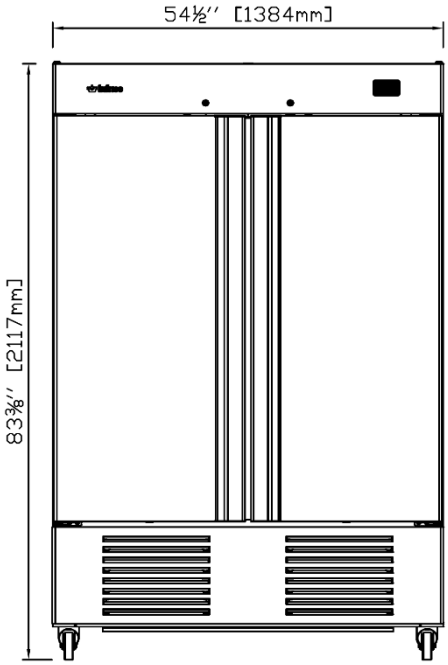

RIGHT VIEW

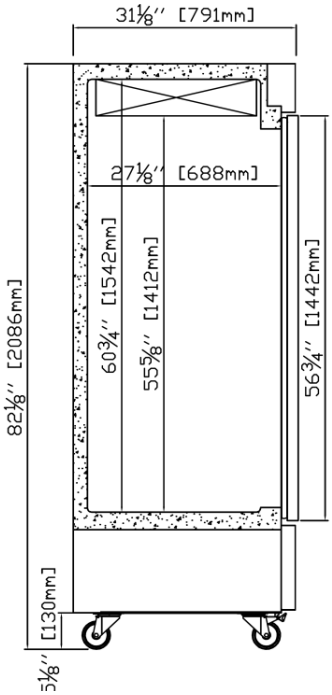


PLAN VIEW

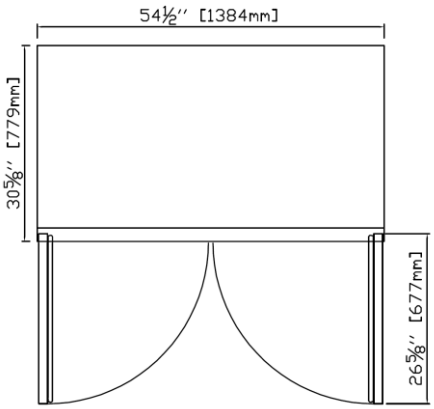


IRR-AN49/BT


ELEVATION

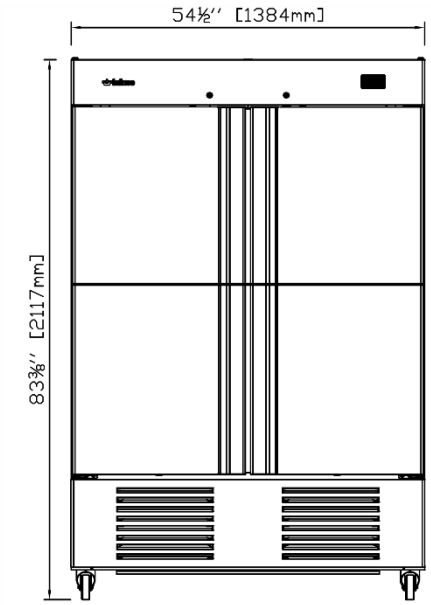

RIGHT VIEW

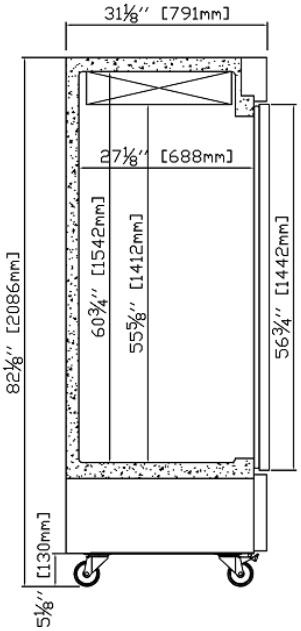

PLAN VIEW

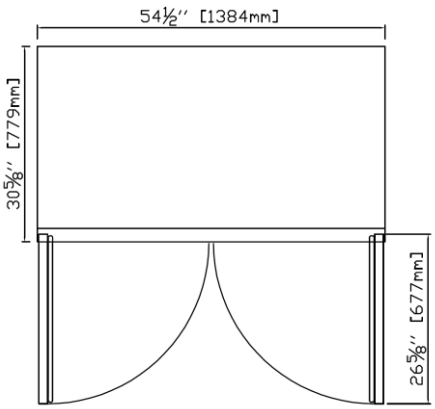

IRR-AN49_4

Review: 01 Date: 05/8/2026 IRT-AN

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

INFRICO-North America Corporate Division
11200NW 25th St ste 123, Sweetwater. FL, 33172
(305) 777 9599

www.infrico.us
sales@infrico.com
service@infrico.com

Project:_____

Location:_____


Item #:_____Quantity:_____

Model #:_____

MODEL: IRR-AN23_2 / IRR-AN49_4
IRR-AN67_6 / IRR-AN23_49_67_BT_49MX


Bottom mounted
Reach-In refrigerators & Freezers

ELEVATION | RIGHT VIEW | PLAN VIEW

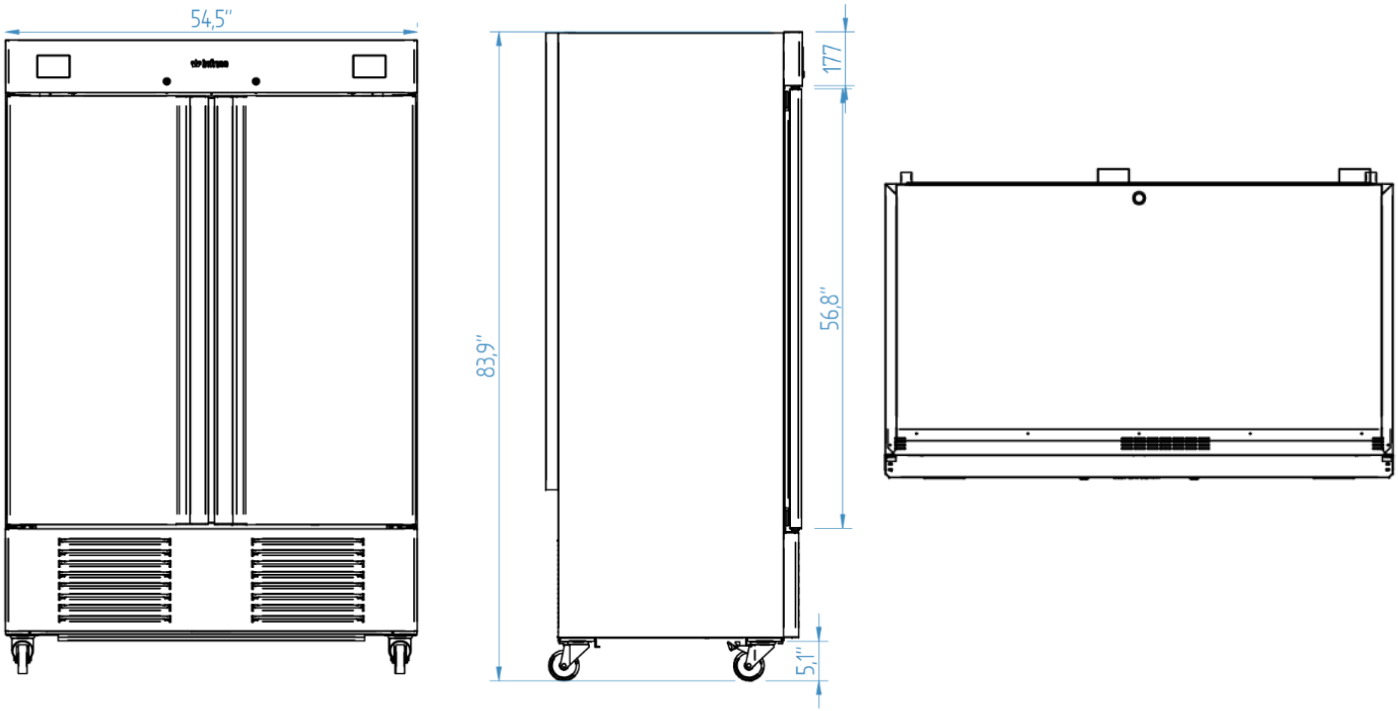

IRR-AN49MX

ELEVATION | RIGHT VIEW | PLAN VIEW

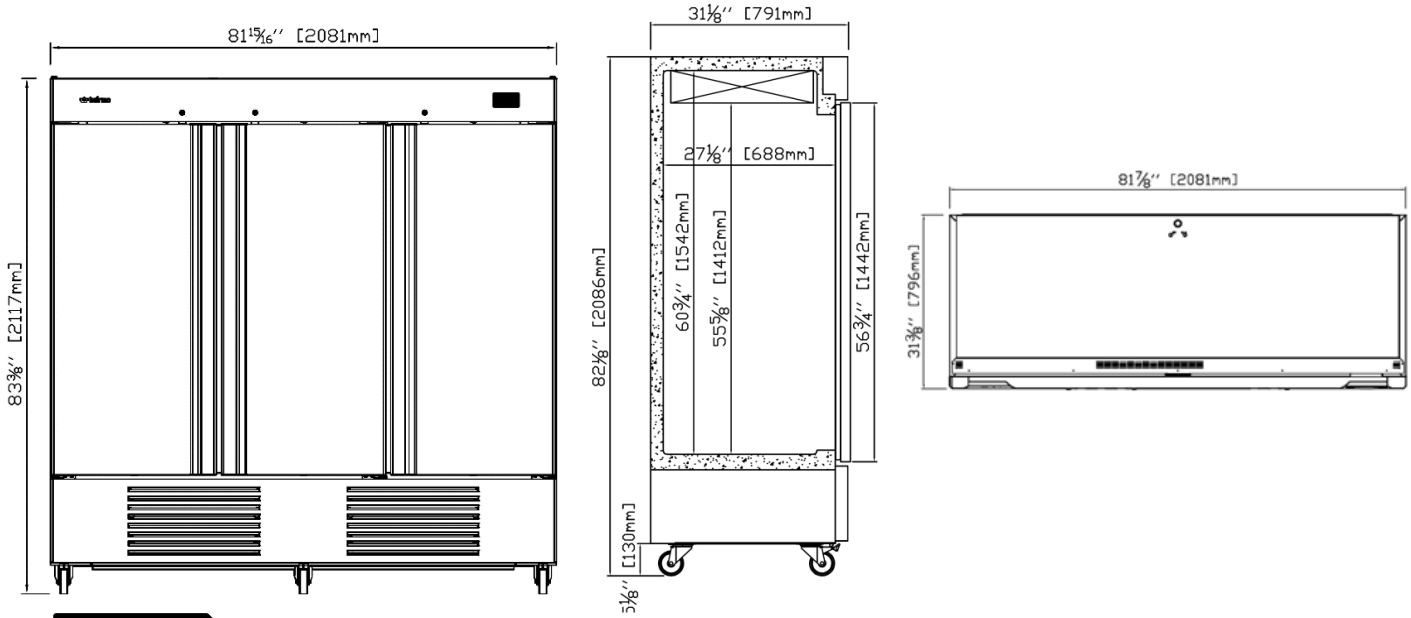

IRR-AN67/BT

Review: 01 Date: 05/8/2026 IRT-AN

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

INFRICO-North America Corporate Division
11200NW 25th St ste 123, Sweetwater. FL, 33172
(305) 777 9599

www.infrico.us
sales@infrico.com
service@infrico.com

Project:_____

Location:_____


Item #:_____Quantity:_____

Model #:_____


MODEL: IRR-AN23_2 / IRR-AN49_4
IRR-AN67_6 / IRR-AN23_49_67_BT_49MX

Bottom mounted
Reach-In refrigerators & Freezers


ELEVATION

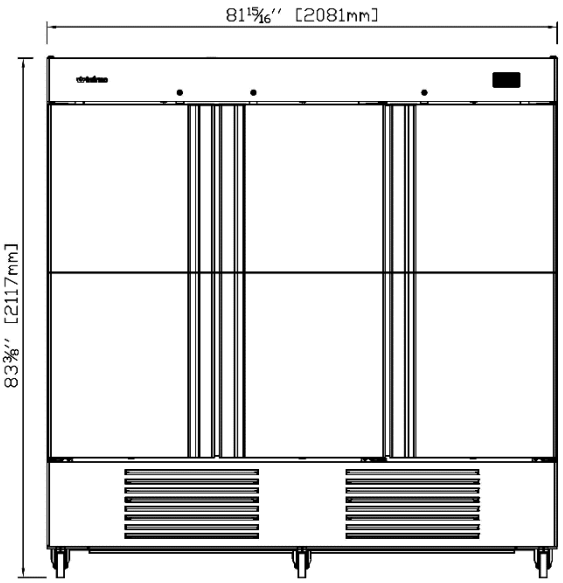

RIGHT VIEW

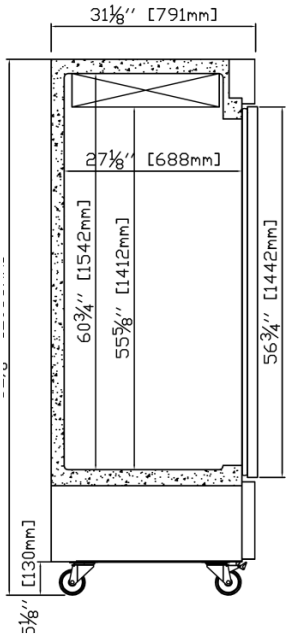

PLAN VIEW

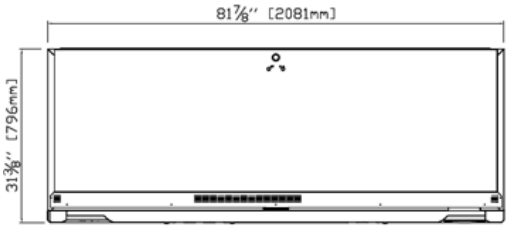

IRR-AN67_6

Review: 01 Date: 05/8/2026 IRT-AN

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

INFRICO-North America Corporate Division
11200NW 25th St ste 123, Sweetwater. FL, 33172
(305) 777 9599

www.infrico.us
sales@infrico.com
service@infrico.com