
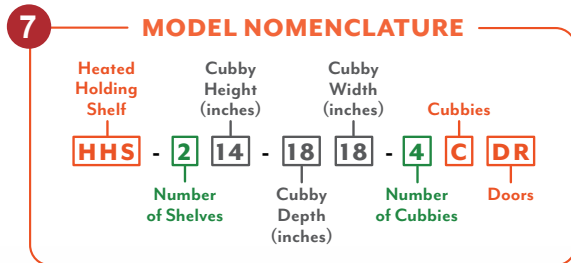


HEATED HOLDING CUBBIES**For Serving Trays, Takeout Containers and Bagged Meals**TEMP SET RANGE: 90° – 190°F (32° – 88°C) **RADIANT "HHS-C" SERIES*****Cubbies keep to-go orders hot and separated for seamless pick-up***

- 1** Keep to-go orders warm and separated with no special software or locks required, making pick-up easy and increasing customer satisfaction
- 2** Blanket elements deliver precise and consistent radiant heat, eliminating hot and cold spots
- 3** Fast heat up, FWE's heated shelves reach 175°F (79.5°C) in less than 15 minutes
- 4** Rear-mounted ON/OFF switch
- 5** Electronic temperature control hidden behind side panel allows operators to save their ideal preset work surface temperature from 90°F to 190°F (32°C to 88°C)
- 6** Adjustable legs for proper placement on uneven flooring
- 7** Additional custom sizes and standard sizes available to fit one shelf to four shelf applications (consult factory)
- 8** All stainless steel construction for ease of cleaning

****Two year limited warranty****(Shown with Optional Accessories Lexan Doors and Custom Door Labels)*


Blanket Elements Eliminate Hot and Cold Spots



Rear-Mounted ON/OFF Switch




Hidden Controls



Customize Sizing & Spacing

SPECIFICATIONS

HEATED HOLDING CUBBIES

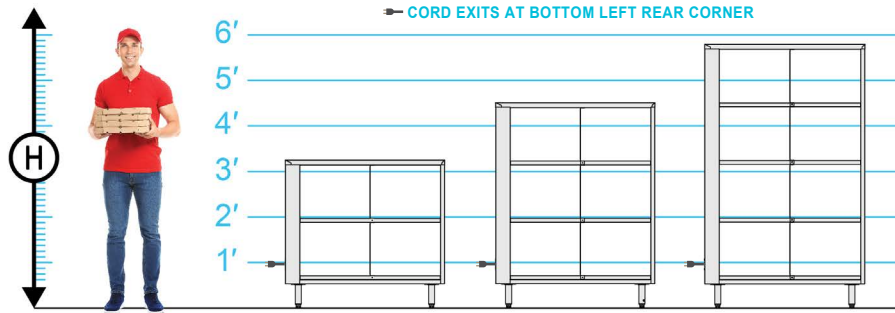


MODEL NUMBER	OVERALL EXTERIOR DIMENSIONS IN. (mm)						CONSULT FACTORY FOR SHIPPING CLASS	
	CUBBY SIZE DIMENSIONS			HIGH "H"	DEEP "D"	WIDE "W"	LEG SIZE	SHIP WT. LBS. (KG)
	CUBBY DEPTH "D"	CUBBY WIDTH "W"	CUBBY HEIGHT "H"					
	18"	18"	14"	38.75" (985)	19.25" (489)	42.25" (1074)	6"	190 (87)
	18"	18"	14"	53.75" (1365)	19.25" (489)	42.25" (1074)	6"	230 (105)
	18"	18"	14"	68.75" (1747)	19.25" (489)	42.25" (1074)	6"	260 (118)

Models are Available with:

Individual Power Switches on Each Shelf, [add "IS"]

Individual Temperature Control on Each Shelf [add "IC"]

See-thru Lexan doors [add "DR"]

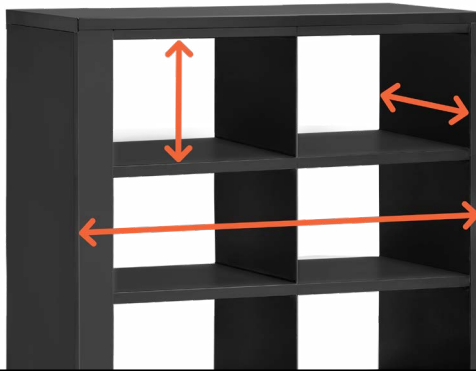

Customize cubby dimensions and spacing to fit your operation.

Consult Factory.

Powder coat your cubbies to match your design.

Consult Factory for Ultra-Premium Color Options.



ELECTRICAL DATA		
MODEL NUMBER	HHS-214-1818-4C	
STANDARD		
VOLTS	120	220-240
WATTS	694	756
AMPS	5.8	3.3
HERTZ	60	60
PHASE	Single	Single
PLUG USA		
	5-15P	6-15P
PLUG CANADA		
	5-15P	6-15P
MODEL NUMBER	HHS-314-1818-6C	
STANDARD		
VOLTS	120	220-240
WATTS	1041	1135
AMPS	8.7	4.9
HERTZ	60	60
PHASE	Single	Single
PLUG USA		
	5-15P	6-15P
PLUG CANADA		
	5-15P	6-15P
MODEL NUMBER	HHS-414-1818-8C	
STANDARD		
VOLTS	120	220-240
WATTS	1388	1513
AMPS	11.6	6.6
HERTZ	60	60
PHASE	Single	Single
PLUG USA		
	5-15P	6-15P
PLUG CANADA		
	5-15P	6-15P

*Dedicated circuit.

CONSTRUCTION. Heliarc welded, single unit construction of stainless steel; 18 gauge inside, corners, and dividers, 20 gauge shelves and removable side panels.

INSULATION. High density fiberglass insulation throughout each shelf.

LEGS. Each leg shall have a reinforced 10 gauge mounting plate welded to base of unit.

HEATING SYSTEM/CONTROLS.

Radiant heat system shall include a blanket heating element system. Controls shall include a master ON/OFF switch with power indicator light. Adjustable temperature range from 90°F to 190°F (32°C to 88°C). Standard factory preset to 175°F (79.5°C).

ELECTRICAL CHARACTERISTICS. 3 wire grounded tri-directional power cord and plug, rear mounted for safety. See electrical data chart above for amperage, receptacle configuration and dedicated circuit information.

INSTALLATION. Unit should not be installed in an area where adverse environmental conditions are present.

ELECTRICAL

220 volt, 50/60 hz single phase
Individual temperature control [IC]
(may affect plug configuration)

SPACINGS

Custom cubby size and spacing

LEGS

Legs with flanged feet

EXTRAS

See-thru Lexan doors [DR]

Enclosed on three sides

Powder coating

LED Lighting