



REACH-IN BOTTOM-MOUNT SERIES REFRIGERATORS GLASS DOORS

Features

- CFC free refrigerant and foam insulation
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- 4 adjustable, heavy-duty epoxy coated wire shelves per door
- Clip-on shelf tag holders
- Condensate heating element built into condensate pan for efficient evaporation of excess water
- Easy to mount 4" casters (lockable in front) are standard with all units
- Self-closing doors that remain open at 90 degrees
- Magnetic gasket can be replaced without any tools
- Exterior: 430 stainless steel, door & front panel: 202 stainless steel
- Interior: 304 stainless steel
- R-290 Natural refrigerant
- Temperature: 33 to 40°F / 0.5 to 4°C
- Electrical: 115/60/1 with NEMA 5-15P plug, 10ft cord



NEMA
5-15P



IB27RG



IB54RG

Specifications

DESIGNED TO OPERATE IN AMBIENT TEMPERATURES BETWEEN 40F-90F FOR OPTIMUM PERFORMANCE.



Certified to ANSI/NSF-7 Standards

Model	Doors	Ext. Dimensions W X D X H (In)	Int.. Dimensions W X D X H (In)	Amps	H.P	Ship Weight
IB27RG	1	26.8 X 31.9 X 82.3	22.2 X 27.6 X 50.2	3	1/5	366 lbs
IB54RG	2	53.9 X 31.9 X 82.3	49.4 X 27.6 X 50.2	4.5	1/4	598 lbs




REACH-IN BOTTOM-MOUNT SERIES REFRIGERATORS GLASS DOORS



Certified to ANSI/NSF-7 Standards

Dimensions in inches (mm)

IB27RG

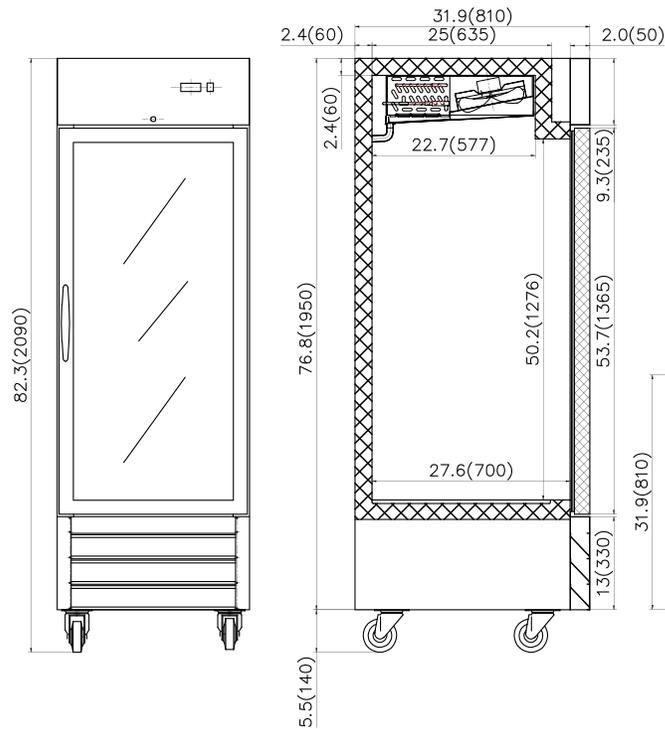

IB54RG

