

GAS FRYER 2 BASINS 23 L

Project:
Rev:
Zone:
Location:



CODICE
CR0996749

MODELLO
D9423/10 FRGM

SERIE
DIAMANTE90



GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200. Wide range of accessories.

TECHNICAL SPECIFICATIONS

AISI 18/10 stainless steel tanks with cold zone and foam expansion zone.
Oil drain taps.
Oil drip pans on request.
Safety thermostat (230°C) against excessive oil temperatures.
IPX5 water jet protection

The large cold zone allows frying residues to settle, significantly extending the quality and life of the oil.

Heating via stainless steel burner outside the tank.

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.

Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

GAS FRYER 2 BASINS 23 L

Project:
Rev:
Zone:
Location:



CODICE
CR0996749

MODELLO
D9423/10 FRGM

SERIE
DIAMANTE90

Technical Information

SPECIFICATION	DATA
MATERIAL	CR0996749
DEFINITION	D9423/10 FRGM GAS FRIDGE 2V 23LT MELTING
COMMERCIAL LINE	DIAMANTE
SUPPLY	MIXED
DIM. WIDTH	860 mm
DIM. PRODUCTIVITY	1020 mm
DIM. HEIGHT	870 mm
NET WEIGHT	114,800 Kg
VOLUME (net)	0,763
PACKAGE LENGTH	860,000 mm
PACKAGE WIDTH	1020,000 mm
PACKAGING HEIGHT	1150,000 mm
PACKAGE VOLUME	1,010 m3
GROSS PACKING WEIGHT	130,000 Kg
STANDARD POWER SUPPLY	220-240V 1N
FREQUENCY	50 Hz
ELECTRICAL POWER	0,040 kW
GAS POWER	46,00
GAS POWER (G25.3/25mbar)	44,00
GAS/REFRIGERANT TYPE	GPL 28-30/37 mbar
VOLTAGE	230
IP GRADE	IPX4
CERTIFIED MODEL	D9423/10 FRGM

GAS FRYER 2 BASINS 23 L

Project:
 Rev:
 Zone:
 Location:




CODICE
CR0996749

MODELLO
D9423/10 FRGM

SERIE
DIAMANTE90

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRIJNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm
 MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

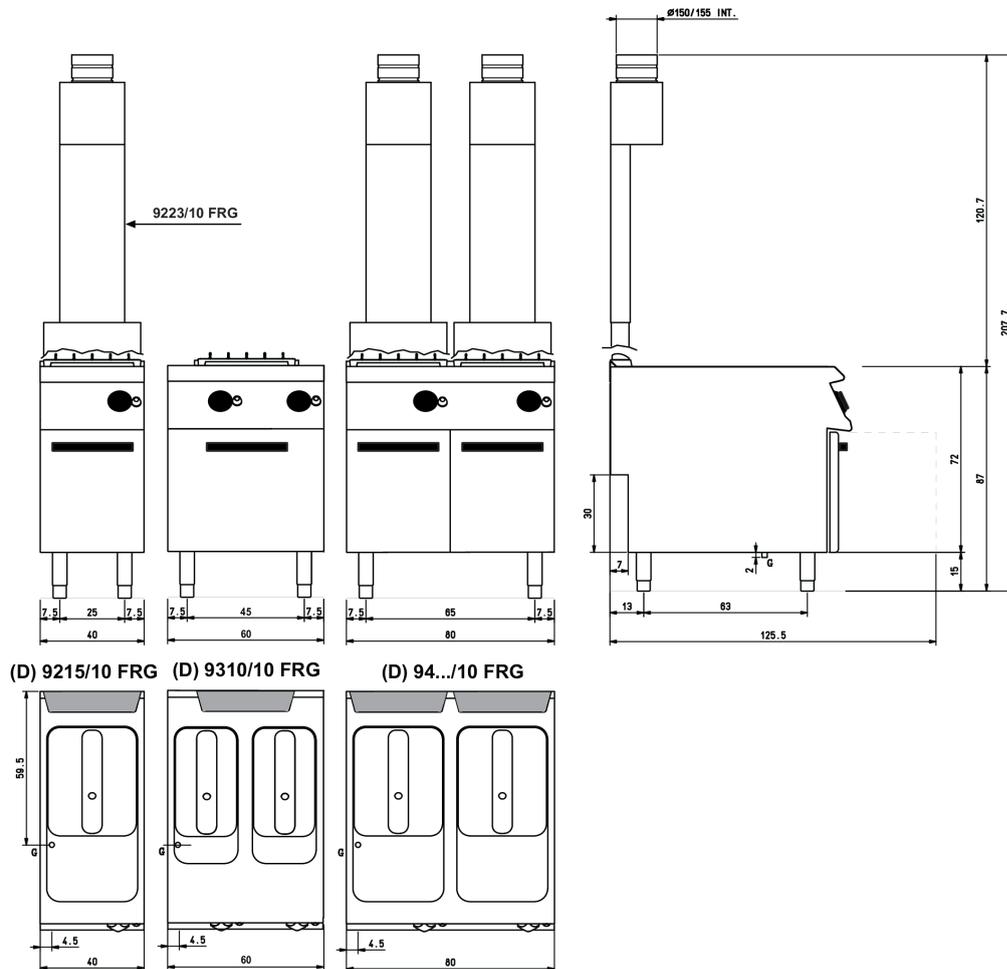

Legenda - Legende - Key - Légende - Leyenda - Legenda

G Attacco arrivo gas - Gasanschluss - Gas connection
 Arrivée gaz - Union de gas - Gasaansluiting
EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)

GAS FRYER 2 BASINS 23 L

Project:
Rev:
Zone:
Location:



CODICE
CR0996749


MODELLO
D9423/10 FRGM

SERIE
DIAMANTE90

Product's PLUS



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



The large cold zone allows frying residues to settle, significantly extending the quality and life of the oil.



Heating via stainless steel burner outside the tank.

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.



GAS FRYER 2 BASINS 23 L

Project:
Rev:
Zone:
Location:



CODICE
CR0996749

MODELLO
D9423/10 FRGM

SERIE
DIAMANTE90

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1353879	DCF15/17	Basket for tub 15 - 17 litres 1 pcs 24x33,7x12 cm capacity 15-17 litres
CR1353889	DCF15/17P	Small basket for tub 15-17 litres 1 pcs 12x33,7x12 cm capacity 15-17 litres
CR1353929	D9BRO	
BN0221100047	CA 40/10	
BN0221100048	CA 60/10	
CR0592779	ZF4	
CR0592830	ZG	
CR0592820	9ZL	
MA97432000	R	
MA97433000	RI	
CR0592869	PZM	
CR0593580	9PT	
CR0592879	KPA	
CR0592940	9CAT *	Water column for top equipment