



SC & SC-NU

Mobile All Purpose Counters

SC & SC-NU: Mobile All-Purpose Counters

Short Form Specifications

Exterior body is constructed of 18-gauge stainless steel side panels and 14-gauge galvanized bottom. All exterior side panels are reinforced with overlapping corners and are welded in place. All body cutouts are reinforced with 14-gauge galvanized channel supports.

Exterior top is constructed of 14-gauge stainless steel, welded, ground and polished into one integral unit. Top is fabricated with square exterior corners.

Casters unit is mounted on 5" (12.7cm) diameter swivel casters with non-marking polyolefin tires and plate brakes. Overall height of caster assembly is 6" (15.2cm).

Two year parts and labor warranty.

The following applies to SC Series only


SC units have a one or two door dry compartments(s) constructed of 18-gauge stainless steel. Each compartment is equipped with a stainless steel shelf; doors are double-wall construction, with stainless steel front panel.

- SC-28, one compartment, 18" wide with one door
- SC-36, one compartment, 24" wide with one door
- SC-50, one compartment, 36" wide with two doors
- SC-60, one compartment, 48" wide with two doors
- SC-74, one compartment, 48" wide with two doors
- SC-96, two compartment, each 36" wide with two doors each

Optional Accessories & Modifications

- A)** 12" (30.5cm) wide stainless steel fold-down tray slide
- C)** 10" (25.4cm) wide three-bar fold down tray slide
- D)** 10" (25.4cm) wide composite fold down cutting boards
- E)** 10" (25.4cm) wide stainless steel fold down work shelf
- F)** Line-up interlock device
- G)** Glass-front counter protector
- H)** Two tier display with glass shelves and sneeze guards
- HD)** Dual service two tier display with sneeze guards
- I)** Three tier display with glass shelves and sneeze guards
- J)** 12" (30.5cm) wide 18-gauge stainless steel over shelf
- KS)** Single service flip-up sneeze guard
- KD)** Double service flip-up sneeze guard
- L)** *Fluorescent or incandescent light fixtures (specify which)
- M)** *Radiant heat lamps
- MB)** *Bullet-style heat lamps
- P)** Open under storage with shelf (KH-NU Series only)
- Q)** *120V/60Hz/10, 10 amp convenience outlet with breaker
- SG5A)** Single dry insert with doors (KH-NU Series only)
- SG5B)** Double dry insert with doors (KH-NU Series only)
- ST)** Stainless steel trim strips
- U)** 14" x 30" (35.6cm x 76.2cm) stainless steel end drop shelf
- V)** 6" (15.2cm) high adjustable stainless steel legs in lieu of casters



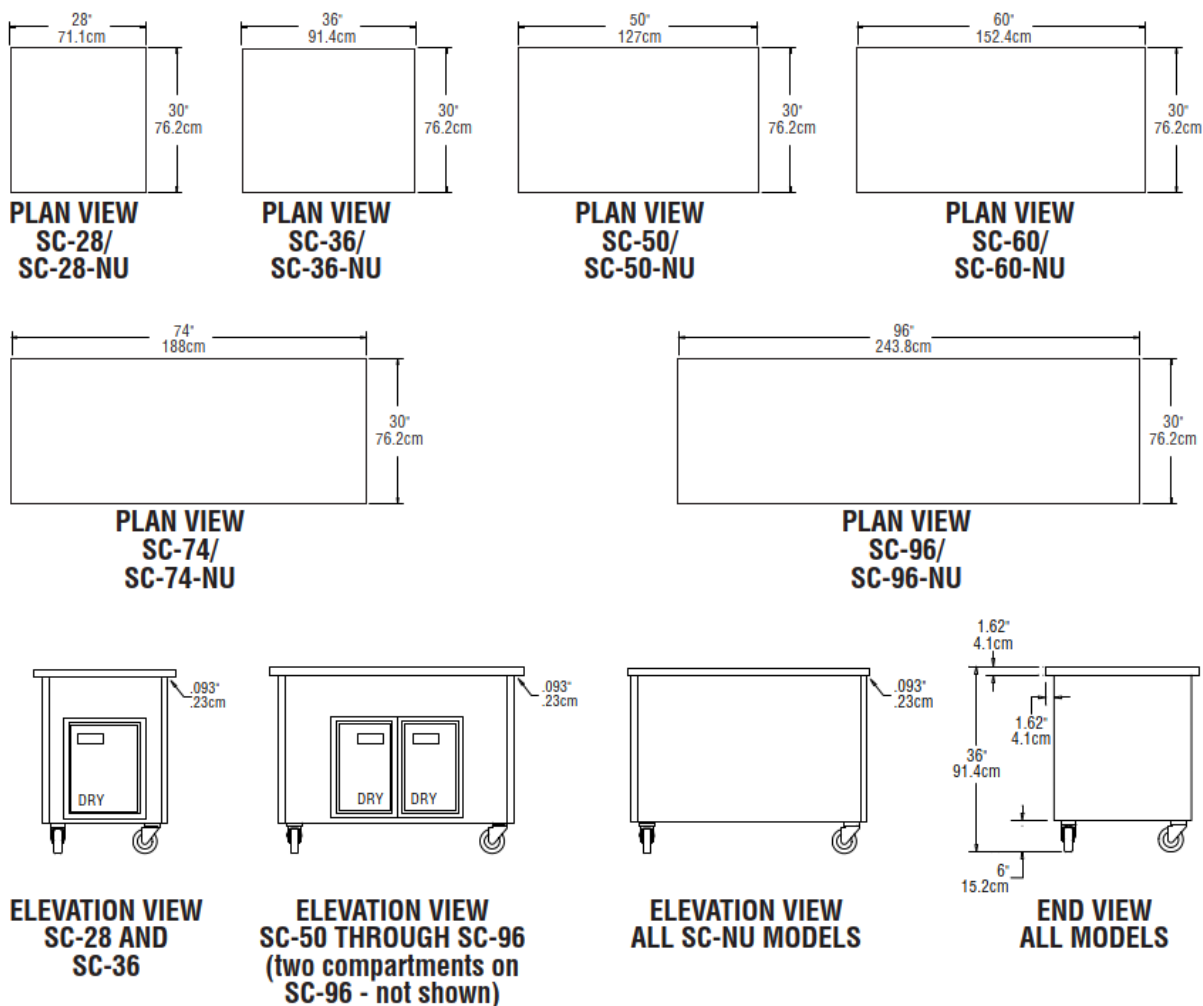

Mechanical Data—Standard Unit

MODEL NUMBER	# OF DOORS	# OF SHELVES	SHIP WEIGHT	MODEL NUMBER	SHIP WEIGHT
SC-28	1	1	165 lbs/75 kg	SC-28-NU	120 lbs/54 kg
SC-36	1	1	185 lbs/84 kg	SC-36-NU	160 lbs/73 kg
SC-50	2	1	205 lbs/93 kg	SC-50-NU	180 lbs/82 kg
SC-60	2	1	240 lbs/109 kg	SC-60-NU	210 lbs/95 kg
SC-74	2	1	270 lbs/123 kg	SC-74-NU	240 lbs/109 kg
SC-96	4	2	310 lbs/141 kg	SC-96-NU	280 lbs/127 kg

Delfield reserves the right to make changes to the design or specifications without prior notice.