

ELECTRIC BAIN-MARIE TOP

CODICE
CR0991199

MODELLO
D92/10TCBE

SERIE
DIAMANTE90

Project:
Rev:
Zone:
Location:



GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200. Wide range of accessories.

TECHNICAL SPECIFICATIONS

Tank dimensions Gastro Norm. Perforated false bottom for vessel support. Adjustable temperatures from 30° to 90°C. Tank equipped with overflow level. Gas version: burner controlled by thermostatic safety thermocouple valves and piezo ignition. Electric version: armoured heating elements positioned outside the tank, water filling by means of solenoid valve.

Possibility of setting 2 timers to control cooking. An acoustic signal warns the operator at the end of the set time.

Temperature control via touch screen and adjustment with ergonomic knob

Adjustable temperature in tank with overflow and perforated false bottom for supporting containers. GN-sized tank.

Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

ELECTRIC BAIN-MARIE TOP

Project:
Rev:
Zone:
Location:



CODICE
CR0991199

MODELLO
D92/10TCBE

SERIE
DIAMANTE90

Technical Information

SPECIFICATION	DATA
MATERIAL	CR0991199
DEFINITION	D92/10 TCBE EL. BAIN MARIE TOP M40
COMMERCIAL LINE	DIAMANTE
SUPPLY	ELECTRICS
DIM. WIDTH	400 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	250 mm
NET WEIGHT	24,000 Kg
VOLUME (net)	0,090
PACKAGE LENGTH	440,000 mm
PACKAGE WIDTH	1020,000 mm
PACKAGING HEIGHT	5520,000 mm
PACKAGE VOLUME	0,248 m3
GROSS PACKING WEIGHT	32,000 Kg
STANDARD POWER SUPPLY	220-240V 1N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	1,800 kW
IP GRADE	IPX5
CERTIFIED MODEL	D92/10 TCBE

ELECTRIC BAIN-MARIE TOP

Project:
 Rev:
 Zone:
 Location:


CODICE
 CR0991199

MODELLO
 D92/10TCBE

SERIE
 DIAMANTE90

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRIJNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm
 MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

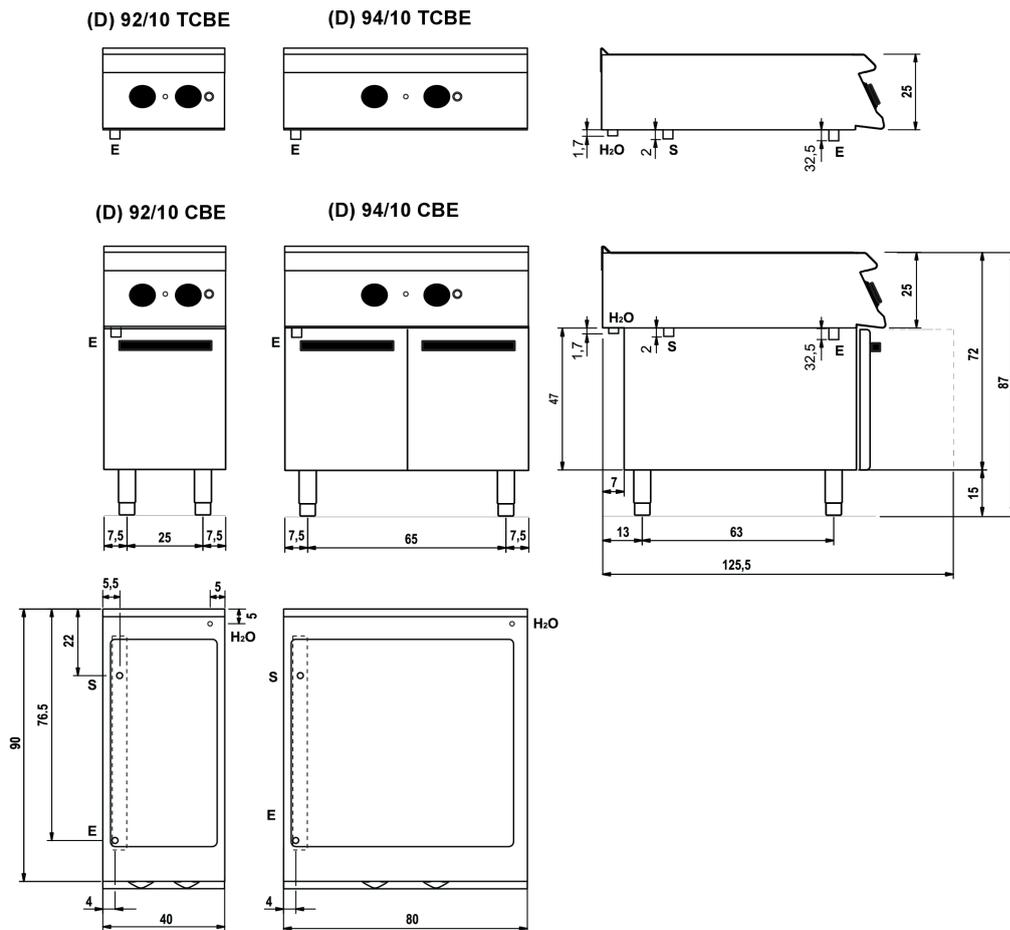

Legenda - Legende - Key - Légende - Leyenda - Legenda

- E** Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief
 Presse étoupe de câble él. - Pisacable - Elektrische kabelwartel
- S** Attacco scarico acqua - Wasserablauf - Water outlet
 Vidange de l'eau - Desaguadero - Wateraftapaansluiting
EN 10226-1 R 1/2
- H2O** Attacco arrivo acqua - Wasseranschluss - Water inlet
 Arrivée eau - Union de agua - Wateraansluiting
EN ISO 228-1 G 1/2

ELECTRIC BAIN-MARIE TOP

Project:
Rev:
Zone:
Location:



CODICE
CR0991199

MODELLO
D92/10TCBE

SERIE
DIAMANTE90

Product's PLUS




Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



Possibility of setting 2 timers to control cooking. An acoustic signal warns the operator at the end of the set time.



Temperature control via touch screen and adjustment with ergonomic knob

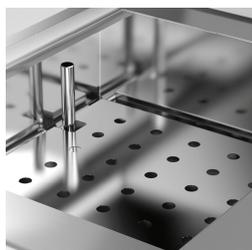

Adjustable temperature in tank with overflow and perforated false bottom for supporting containers. GN-sized tank.

ELECTRIC BAIN-MARIE TOP

Project:
Rev:
Zone:
Location:



CODICE
CR0991199

MODELLO
D92/10TCBE

SERIE
DIAMANTE90

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1355449	D92/10B	Open base 40cm series 90
CR0996979	DBVP4	
CR0997009	DBVPA4	
CR0997029	DAPC	
CR0997019	DAPD	
CR0997039	DAPS	
CR0997049	DAPM	
CR0997059	DAPDB	
CR1353589	DBVC4	
CR0592659	92/10 BH	Open base - Hygienic finish H2 40cm Series 90
CR1353559	DRG11	
CR0592329	9FC40	
CR0592779	ZF4	
CR0592830	ZG	
CR0592820	9ZL	
MA97432000	R	
MA97433000	RI	
CR0592869	PZM	
CR0593580	9PT	
CR0592879	KPA	
CR0592940	9CAT *	Water column for top equipment