

BAKERLUX SHOP.Pro™ LED

Easy-to-use convection oven designed for everyday use in pastry shops



FEATURES

- LED control panel (IPX4)
- Interior LED lighting
- 1-3 Baking steps
- Timer 0 min. to ∞
- Program up to 99 recipes
- 0/20/40/60/80/100% humidity
- 2 fan speeds
- Proofer control*
- Fan shut-off when door is opened

*Proofer sold separately

STEAM.Plus

Instantly produces humidity inside the baking chamber, for excellent results with every batch

AIR.Plus

Bi-directional fan(s) guarantee perfect air and heat distribution within the baking chamber for uniform results at every point throughout every tray

DRY.Plus

Humid air is expelled from the baking chamber to help the internal structure of the product form properly, creating a texture that remains perfect for hours

EFFICIENT.Power

Best-in-class convection efficiency: 60°C to 260°C (140°F to 500°F) in 5 minutes. Low-e glass lining and high-performance insulation ensure reduced energy consumption




	XAFT-04FS-ELD V
DIMENSIONS	FULL SIZE (18" X 26")
SHELVES*	4
SHELF CLEARANCE	3"
POWER	208-240V, 7600W, 25.2A, 6-50P
FANS	2
DOOR SWING	TOP TO BOTTOM
TEMP. RANGE	0 - 260°C 32 - 500°F
CHAMBER DIM.	17.4" L X 27.4" W X 13.2" H
CHAMBER CAP.	3.6 CUFT
EXTERIOR DIM.	33.9" L X 31.5" W X 19.7" H
NET WEIGHT	126 LBS
SHIP DIM.	38.2" L X 44.1" W X 26" H
SHIP WEIGHT	161 LBS

*Wire shelves included

BAKERLUX SHOP.Pro™ LED

CONSTRUCTION


- Stainless steel housing & cooking chamber
- Double-pane glass door
- Insulated baking cavity for thermal efficiency and user safety

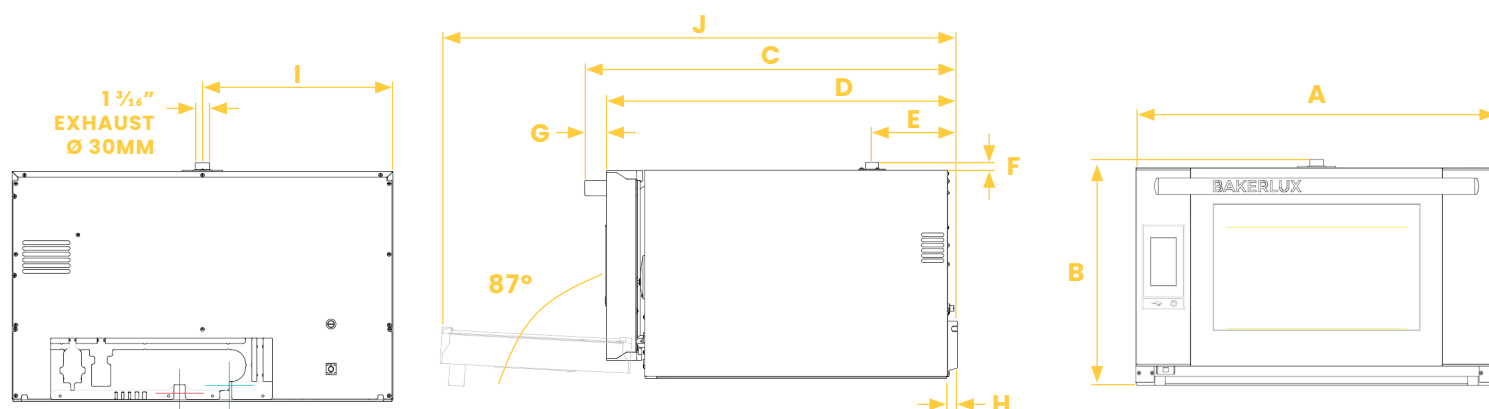

Oven must be min. 2" from the wall on both sides (left and right).

	A	B	C	D	E	F	G	H	I	J
XAFT-04FS-ELD.V	31.5"	19.7"	33.9"	31.9"	7.8"	.7"	2.0"	.9"	15.7"	47.0"

ONE YEAR WARRANTY ON PARTS AND LABOR (GLASS DOOR NOT INCLUDED)



6-50P

V1.03.2022