

FRY TOP GAS PLATE 1/3 RIFLED CHROME-PLATED ON THERMOSTAT COMPARTMENT

Project:
Rev.:
Zone:
Location:



CODICE
CR0996219

MODELLO
D96/10FTTGC1/3R

SERIE
DIAMANTE90



GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200. Wide range of accessories.

TECHNICAL SPECIFICATIONS

A 10-mm inclination of the plates towards the front of the machine allows optimal grease outflow to the grease tray.

Plate welded to the hob that provides a larger cooking zone and eliminates dirt accumulation areas.

Even heat distribution thanks to several burners under the hotplate.

Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

FRY TOP GAS PLATE 1/3 RIFLED CHROME-PLATED ON THERMOSTAT COMPARTMENT

Project:
Rev:
Zone:
Location:



CODICE
CR0996219

MODELLO
D96/10FTTGC1/3R

SERIE
DIAMANTE90

Technical Information

| SPECIFICATION | DATA |
|---------------|-----------|
| MATERIAL | CR0996219 |

FRY TOP GAS PLATE 1/3 RIFLED CHROME-PLATED ON THERMOSTAT COMPARTMENT

Project:
Rev:
Zone:
Location:




CODICE
CR0996219

MODELLO
D96/10FTTGC1/3R

SERIE
DIAMANTE90

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRIITNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm
MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

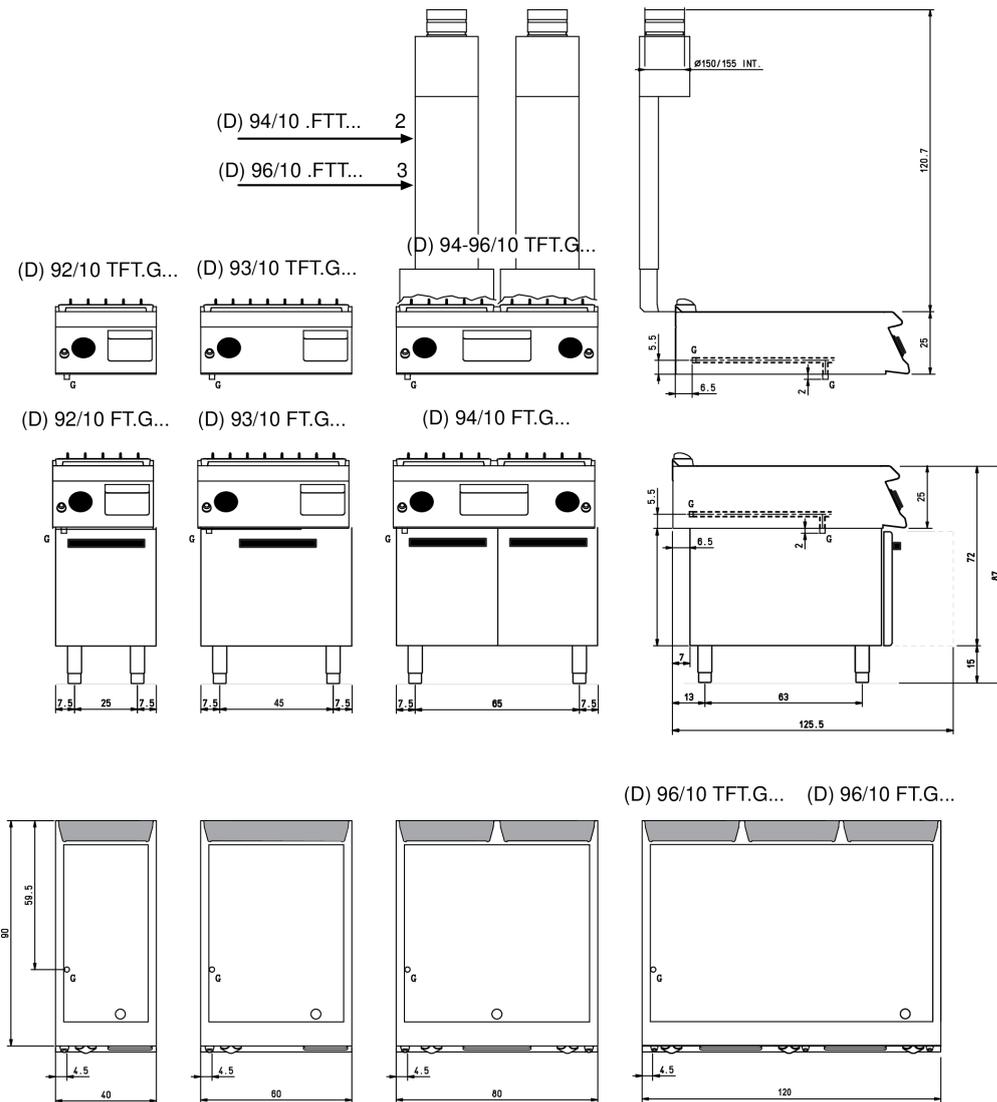

Legenda - Legende - Key - Légende - Leyenda - Legenda

G Attacco arrivo gas - Gasanschluss - Gas connection
Arrivée gaz - Union de gas - Gasaansluiting
EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)

FRY TOP GAS PLATE 1/3 RIFLED CHROME-PLATED ON THERMOSTAT COMPARTMENT

Project:
Rev:
Zone:
Location:



CODICE
CR0996219

MODELLO
D96/10FTTGC1/3R

SERIE
DIAMANTE90

Product's PLUS



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



A 10-mm inclination of the plates towards the front of the machine allows optimal grease outflow to the grease tray.



Plate welded to the hob that provides a larger cooking zone and eliminates dirt accumulation areas.



Even heat distribution thanks to several burners under the hotplate.

FRY TOP GAS PLATE 1/3 RIFLED CHROME-PLATED ON THERMOSTAT COMPARTMENT

Project:
Rev.:
Zone:
Location:



CODICE
CR0996219

MODELLO
D96/10FTTGC1/3R

SERIE
DIAMANTE90

ACCESSORIES

| CODE | MODELLO | DESCRIZIONE |
|------------|----------|--------------------------------------|
| CR0957610 | 90XFTP12 | |
| CR0592079 | NXFTC4 | Fry top cleaning drawer M40-M120 |
| CR0592089 | NXFTC6/8 | Fry top cleaning drawer M60-M80-M120 |
| CR0592060 | NXFTT | |
| CR0996979 | DBVP4 | |
| CR0997009 | DBVPA4 | |
| CR0997029 | DAPC | |
| CR0997019 | DAPD | |
| CR0997039 | DAPS | |
| CR0997049 | DAPM | |
| CR0997059 | DAPDB | |
| CR1353589 | DBVC4 | |
| CR0592809 | ZF12 | |
| CR0592830 | ZG | |
| CR0592820 | 9ZL | |
| MA97432000 | R | |
| MA97433000 | RI | |
| CR0592869 | PZM | |
| CR0593580 | 9PT | |
| CR0592879 | KPA | |