

JOB:	
ITEM NO:	

RIGID STEM CEILING MOUNTED INFRA RED WARMERS IFW-64 SERIES

FEATURES AND BENEFITS:

- Rigid stem ceiling mounted infra red warmer provides stable heat source for fixed installations.
 Keeps food warm and appetizing for total customer satisfaction.
- Provided with four 12" stems to allow for custom lengths.
- Supplied with shatter resistant and thermal shock resistant 250 Watt red lamp (120 Volts).
 White lamp available upon request.
- On-Off switch located at socket for convenience.
- Our standard hood style is available in your choice of four colors: Polished Brass, Polished Nickel, Black or Red.



IFW-64-10-PB






ACCESSORIES and OPTIONS (Available at extra cost):

- Shatter Proof Lamp
- ☐ 240 Volt Service

See page I-13 for accessory details.

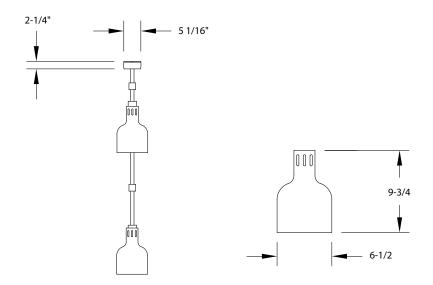

CRES COR MODEL NO. &	12" TUBING SECTIONS: ADJUSTABLE LENGTHS		WEIGHT ACT.	
HOOD STYLE	INCHES	MM	LBS.	KG.
IFW-64-10*	24-3/16 - 60-3/8	615 - 1535	3	1

*Add color suffix:

PN = Polished Nickel

PB = Polished Brass

BL = Black

R = Red

WARMER:

- · Canopy: Spun from .051 aluminum, black anodized.
- Hanger: 16 ga. steel, 1 x 4-1/8 with slots for #10 screws; mounts canopy to customer ceiling box.
- Stem tubing: Four aluminum tubes, 5/8" O.D. x 12", black anodized; connected with aluminum couplings.
- Nipples: 1/8" I.P.S. brass plated steel.
- · Switch housing: 20 ga. steel, black anodized.
- Hood: Spun from .051 aluminum; powder coat finish.
- Units shipped partially assembled.
- Install on 4" standard ceiling box.
- Do not mount closer than 16" above non-metallic surface for 250 Watts.

ELECTRICAL COMPONENTS:

- · Toggle switch.
- · Socket: Porcelain.
- · Lamp: 250 Watts, red.

POWER REQUIREMENTS:

 250 Watts, 120 Volts, 60 Hz., single phase, 2 Amps., 15 Amp. service.

CRES COR.

5925 Heisley Road • Mentor, OH 44060-1833 Phone: 877/CRESCOR • Fax: 440/350-7267 www.crescor.com
© Crescent Metal Products, Inc. 2011 All rights reserved.

SHORT FORM SPECIFICATIONS

Cres Cor Rigid Stem Ceiling Mounted Infra Red Warmer				
Model IFW-64-10. Hood .051 spun aluminum; powder				
coat finish (color:). Four 5/8" O.D. 12"				
aluminum tubes. 250 Watts, 120 Volts, 60 Hz., 1 Phase,				
15 Amp. service. 2-Year Parts / 1-Year Labor warranty.				
Provide the following accessories:				
NSF, CSA-US, CSA-C listed.				

In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.