



# BEVERAGE-AIR®

PROJECT: \_\_\_\_\_  
ITEM # \_\_\_\_\_ QTY: \_\_\_\_\_  
MODEL # \_\_\_\_\_  
AIA # \_\_\_\_\_ SIS # \_\_\_\_\_  
APPROVED: \_\_\_\_\_

## CROSS TEMP® CHEF BASE

### Model: WTCTCS48HC

#### TWO DRAWERS



### OPTIONS & ACCESSORIES

- Left side compressor location (-ALT) (specify at time of unit order)
- Stainless steel back
- Stainless steel interior
- Additional pan supports
- 6" Adjustable legs, 6" seismic legs
- 6" Casters
- Gasket guards
- Flat top overhang (up to 6" overhang on each side)

## 7 YEAR WARRANTY

### Parts, Labor, and Compressor

### CABINET CONSTRUCTION

- Stainless steel front, sides, drawers and grille (galvanized back & bottom)
- Interior liner is made of corrosion resistant aluminum
- Top has full marine edge to prevent spills from dripping over sides
- Full electronic control, configurable to all menu initiatives, temperature range of -15 to 40°F
- Easily converts from refrigerator to freezer
- Top weight capacity 1000 lbs
- One-piece, snap-in magnetic drawer gasket
- 12-Gauge stainless steel drawer slides with Delrin® rollers rated at 275 lbs
- Lifetime warranty on all drawers and slides
- Heavy duty, fire-proof, insulated 16 gauge top
- No heat shield required (must adhere to proper clearance per owners manual)
- Accommodates 6" deep full size food service pans (not included)
- Self-closing drawer feature
- Compressor standard on right side
- 3" Casters, 2 with brakes standard

### REFRIGERATION SYSTEM


- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Variable speed compressor technology achieve 30% more energy efficiency\*\*
- Adaptive defrost
- Non-electric defrost with hot gas condensate evaporation




# BEVERAGE-AIR®

## CROSS TEMP® CHEF BASE Model: WTCTCS48HC


PLAN VIEW

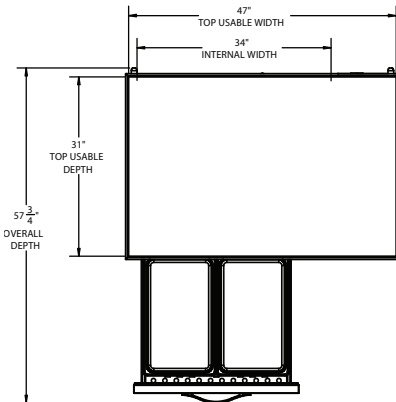

ELEVATION VIEW

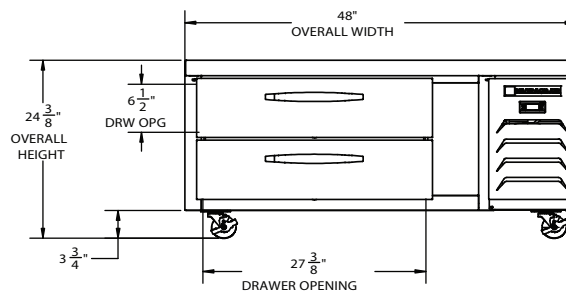

SIDE VIEW

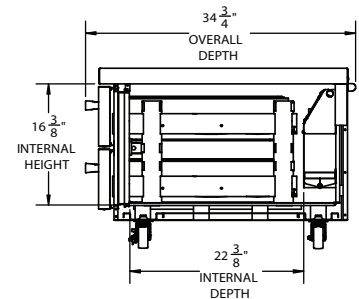

### EXTERNAL DIMENSIONAL DATA

|                                  |                      |
|----------------------------------|----------------------|
| Width Overall (in)               | 48"                  |
| Depth Overall (in)               | 34 3/4"              |
| Height Overall (in)              | 24 3/8"              |
| Number of Drawers                | 2                    |
| Depth with Drawers Extended (in) | 57 3/4"              |
| Drawer Openings (in)             | (2) 27 3/8" x 6 1/2" |
| <b>INTERNAL DIMENSIONAL DATA</b> |                      |
| NET Capacity (cubic ft.)         | 7.21                 |
| Internal Width Overall (in)      | 34"                  |
| Internal Depth Overall (in)      | 22 3/8"              |
| Internal Height Overall (in)     | 16 3/8"              |

\*NOTE: Remote units are field wired and come with 6" legs.  
Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).

\*\* NOTE: Units that utilize variable speed compressor technology can experience nuisance tripping on Class A GFCI outlets which have a trip limit of 4 to 6 mA. To avoid this issue in a location that requires GFCI circuit protection, Beverage-Air recommends using either an Eaton, SGF20, or HUBBELL Model Number GFRST83W 20A Heavy Duty Hospital Grade Self-Test GFCI Receptacle.

Required Clearance: Bottom 3 13/16" & Rear 1"

### ELECTRICAL DATA

|                     |          |
|---------------------|----------|
| Full Load Amps      | 8.7      |
| Voltage             | 115/60/1 |
| Nema Plug (8' cord) | 5-15P    |

### REFRIGERATION DATA

|                           |                    |
|---------------------------|--------------------|
| Horsepower                | 4/5                |
| Capacity (BTU/Hr)         | 1970 - 4950        |
| Heat Rejection (BTU/Hr)   | 2955 - 7425        |
| Charge (lbs/grams/ounces) | 0.331 / 150 / 5.29 |

### SHIPPING DATA

|                       |          |
|-----------------------|----------|
| Gross Weight - Crated | 375 lbs. |
| Height - Crated (in)  | 27"      |
| Width - Crated (in)   | 58"      |
| Depth - Crated (in)   | 38"      |



### ELECTRICAL CONNECTION

115/60/1  
NEMA 5-15P

Unit pre-wired at factory  
and include 8' long cord  
and plug set.

3779 Champion Blvd., Winston-Salem, NC 27105 | 888-845-9800 | Fax: 336-245-6453 | Beverage-Air.com | Sales@bevair.com

Date Issued 7/26 | Printed in U.S.A.