



650 WATT UNDER COUNTER-TOP INCOGNEETO™ INDUCTION BUFFET

B651-U2, B652-U2

650 WATT UNDER COUNTER-TOP INCOGNEETO™ INDUCTION BUFFET B651-U2, B652-U2

Product Name	650 Watt Under Counter-Top Incogneeto™ Induction Buffet	Quantity		Item #	
--------------	---	----------	--	--------	--



Note: Induction buffet units require the use of induction compatible (i.e. magnetic) servingware.

Magneeto™ 2 pictured one included with purchase of each unit



Standard Features

- Under counter-top design, aluminum housing, heavy duty energy efficient electronics, and polycarbonate top
- Easy installation – square ring (supplied) mounts to underside of counter-top and unit snaps into ring
- Units require CookTek Magneeto™ 2 trivet (patent pending) - included with each unit - and standard induction compatible serving dishes. Magneeto™ 2 acts as a temperature sensor, communicator, and locator device which allows heating of induction compatible dishes through stone counter-top
- Units compatible with all natural and engineered stones, 30mm (1 1/4") thick with no substrate, or 20mm (3/4") thick with 20mm (3/4") or 12mm (1/2") plywood substrate
- Temperature selected via control panel, or Magneeto™ 2 can be programmed via keypad to preset a temperature for automatic control
- Automatic pan detection allows for instant energy transmission to pan, and almost no energy consumption when pan is not present
- Maximum temperature limit prevents damage to servingware, keeps food in the "safe zone"
- Standard Cat 5e or Cat 6 patch cable from unit to control box is included. Replacement cables up to 25ft (7.6m) long may be used but MUST BE SHIELDED
- Lock feature prevents unwanted setting changes
- Red LED display for precise user feedback and control

- Available in 650 watts (100-120VAC - three units per 15 amp circuit, four per 20 amp circuit) and 650 watts (200-240VAC - five units per 15 amp circuit)
- Three year limited warranty in US and Canada only - see warranty statement for full details
- Made in the USA*

Specifications

Shall be a CookTek under counter-top induction buffet unit, model _____ with a total kW rating of 0.65 kW.

Unit shall be manufactured in the United States and constructed of an aluminum housing and polycarbonate top.

Unit shall be built with an auto shut-off feature to prevent overheating, offer self-diagnostics, and have a pan-maximizer feature to ensure maximum heating of any induction compatible pan.

Unit shall operate on _____ power with integral _____ cord and plug (supplied).

NOTE: When mounting, the TOTAL DISTANCE from the top of the unit to the top of the countertop should be 1.57" +/- 0.1" (40mm +/- 3mm) for optimum performance.

*of USA and imported parts

CookTek Induction Systems, LLC
156 N. Jefferson St. Ste 300
Chicago, IL 60661-1436, USA
www.cooktek.com

Tel: 1.312.563.9600 Fax: 1.312.432.6220
Toll Free: 1.888.COOKTEK (266.5835)
Toll Free Fax: 1.888.COOKFAX (266.5329)

B65x-U2 14098_A USINTL









650 WATT UNDER COUNTER-TOP INCOGNEETO™ INDUCTION BUFFET

B651-U2, B652-U2

- Internal cooling fan displaces 70 CFM (2.0m³/min). Adequate cabinet venting should be provided - typically 16in² (100cm²) per unit. The maximum (do not exceed) ambient temperature is 50°C/122°F.
- Cooling clearance: 6" (152mm) below
- When mounting, the TOTAL DISTANCE from the top of the unit to the top of the countertop should be 1.57" +/-0.1" (40mm +/- 3mm) for optimum performance.

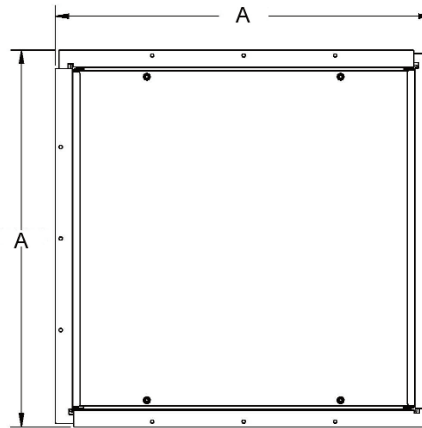

Dimensions		
	inches	mm
A	17.50	445
B	4.50	114
C	2.90	74
D	2.25	57
E	3.26	83
F	1.91	46
G	2.46	62
H	3.81	97
J	1.02	26

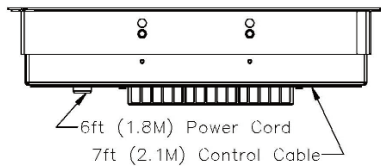

Specifications

Model Number	B651-U2	B652-U2
Power Requirements	100-120VAC, 1Ph	200-240VAC, 1 Ph
Power Consumption	650W (max)	650W (max)
Voltage	100-120VAC, 50/60 Hz	200-240VAC, 50/60 Hz
Amperage	5A (max)	2.7A (max)
Power Range	100-650W	100-650W
Preset Temperatures	150, 160, 175, 190°F / 65, 70, 80, 85°C	150, 160, 175, 190°F / 65, 70, 80, 85°C
Additional Temperature Settings Range	80-190°F / 30-85°C	80-190°F / 30-85°C
Dimensions (in)	17.50" x 17.50" x 4.50"	17.50" x 17.50" x 4.50"
Dimensions (mm)	445 x 445 x 114	445 x 445 x 114
Weight	15 lbs / 6.8 kg	15 lbs / 6.8 kg
Packaged Weight	20 lbs / 9 kg	20 lbs / 9 kg
Packaged Dimensions (in)	20" x 20" x 10"	20" x 20" x 10"
Packaged Dimensions (mm)	508 x 508 x 254	508 x 508 x 254
Power Cord Length	6 ft / 1.8 m	6 ft / 1.8 m
Plug Type	NEMA 5-15P	NEMA 6-20Pin US/Canada - country specific elsewhere
Remote Control Box Cord Length	6 ft / 1.8 m	6 ft / 1.8 m
Warranty	36 months limited parts and labor in US/Canada only - see statement for details	

Note: Ambient air should not exceed 50°C/122°F. Many local codes exist, and it is the Owner and Installer's responsibility to comply with those codes. CookTek continually improves its products and reserves the right to change or improve specifications without notice.

CookTek Induction Systems, LLC
156 N. Jefferson St. Ste 300
Chicago, IL 60661-1436, USA
www.cooktek.com

Tel: 1.312.563.9600 Fax: 1.312.432.6220
Toll Free: 1.888.COOKTEK (266.5835)
Toll Free Fax: 1.888.COOKFAX (266.5329)

B65x-U2 14098_A USINTL

650 WATT UNDER COUNTER-TOP INCOGNEETO™ INDUCTION BUFFET B651-U2, B652-U2

