




PRODUCT FEATURES

- Dual purpose used wet or dry
- Auto Fill - Dry elements
- Overhead halogen lights
- with adjustable dimmer
- Pans 65mm deep
- Full square glass canopy
- 200mm rear service shelf (fitting optional)

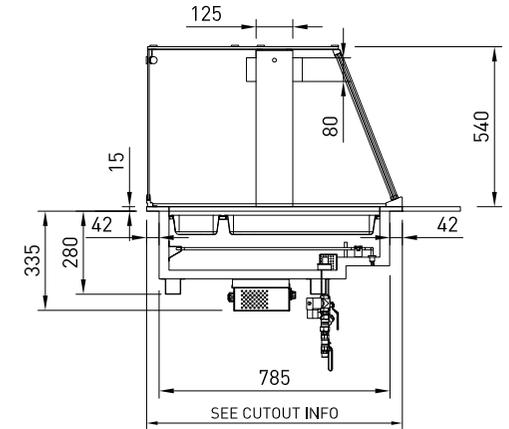

LSBM LEFT SIDE ELEVATION

GASTRO PANS

Units supplied with 4 x 1/1 and 4 x 1/3 pans at 65mm deep, max pan depth is 100mm




ELECTRICAL POWER

Electrical power cord 3000mm 1 phase connection required.

Unit must be hard wired on site to isolation switch.

WATER DRAINAGE

Screw on stop cock valve drain pipe
Ideally drain connected to waste. 90deg^C rated pipe
Overflow flexible waste pipe 19mm dia.1000 mm length from spigot must be connected to waste.

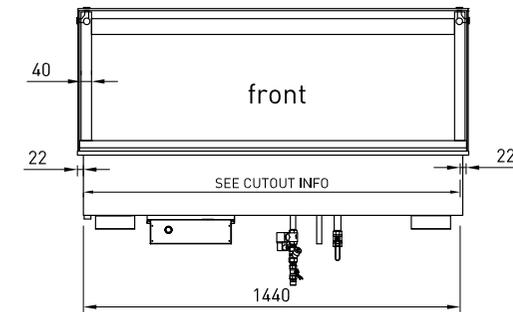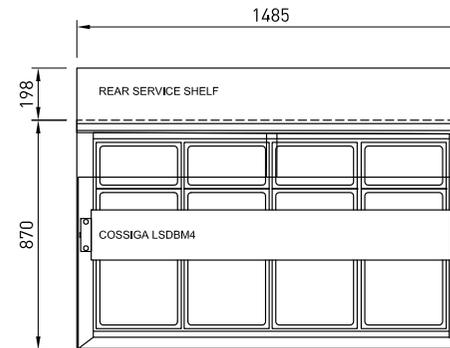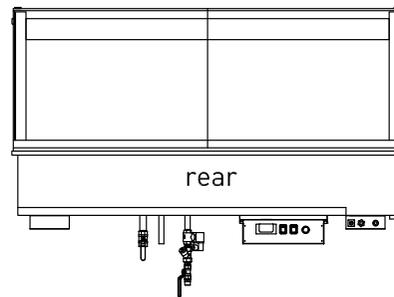

CABINET DIMENSIONS & SPECIFICATIONS

Prior to installation see, installation guidelines, ventilation requirements and drainage options documents

***ASSEMBLY REQUIRED**

MODEL	CABINET					PANS	WATER FILL	TEMP	DISPLAY AREA	POWER		CONNECTION ELECTRICAL POWER CORD 3000MM	VOLTAGE	PACKED FOR SHIPPING			
	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT [KG]	CUT OUTS					KW 230V WITH LAMP	AMPS WITH LAMP			NZ/AUS/UK	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]
LSDBM4	1485	870	555	121	1460X815	4 x 1/1 4 x 1/3	106	55 - 65	1.02	4.78	20.8	30 AMP LEAD ONLY	220~240V	1590	950	670	121