




PRODUCT FEATURES

- Dual purpose used wet or dry
- Auto Fill - Dry elements
- Overhead halogen lights
- with adjustable dimmer
- Pans 65mm deep
- Full square glass canopy
- 200mm rear service shelf (fitting optional)

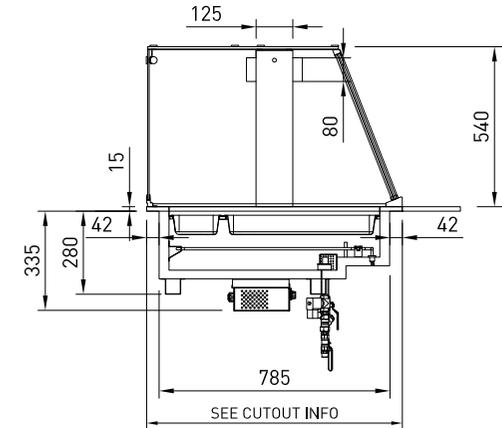

LSBM LEFT SIDE ELEVATION

GASTRO PANS

Units supplied with 3 x 1/1 and 3 x 1/3 pans at 65mm deep, max pan depth is 100mm




ELECTRICAL POWER

Electrical power cord 3000mm 1 phase connection required.

Unit must be hard wired on site to isolation switch.

WATER DRAINAGE

Screw on stop cock valve drain pipe
Ideally drain connected to waste. 90deg^C rated pipe
Overflow flexible waste pipe 19mm dia.1000 mm
length from spigot must be connected to waste.

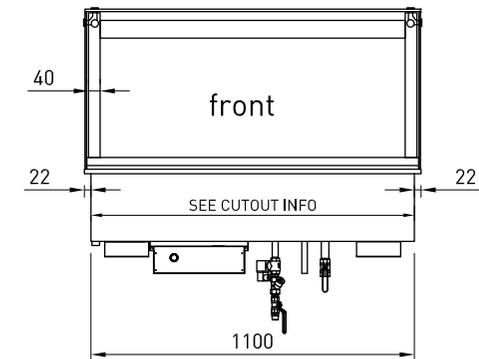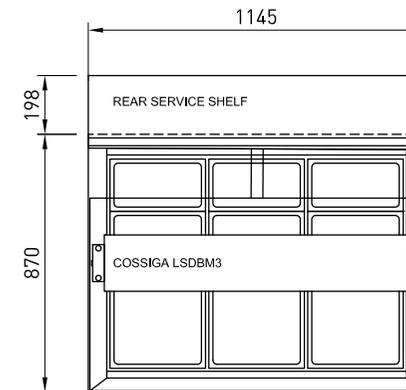

CABINET DIMENSIONS & SPECIFICATIONS

Prior to installation see, installation guidelines, ventilation requirements and drainage options documents

***ASSEMBLY REQUIRED**

MODEL	CABINET				CUT OUTS	PANS	WATER FILL	TEMP	DISPLAY AREA	POWER		CONNECTION ELECTRICAL POWER CORD 3000MM	VOLTAGE	PACKED FOR SHIPPING			
	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT [KG]						65mm Gastro Pans	LITERS			DEG C	M2	KW 230V WITH LAMP	AMPS WITH LAMP
LSDBM3	1145	870	555	101	1120X815	3 x 1/1 3 x 1/3	80	55 - 65	0.76	3.58	15.6	20 AMP LEAD ONLY	220~240V	1250	950	670	101
LSDBM4	1485	870	555	121	1460X815	4 x 1/1 4 x 1/3	106	55 - 65	1.02	4.78	20.8	30 AMP LEAD ONLY	220~240V	1590	950	670	121
LSDBM5	1825	870	555	147	1800X815	5 x 1/1 5 x 1/3	132	55 - 65	1.31	6.09	26.5	30 AMP LEAD ONLY	220~240V	1930	950	670	147