


	[305mm]				
				"A"	"B"
(Å	
	8"	"C"	-		

MODEL	DIM "A"	DIM "B"	DIM "C"
13234	2-1/4"	5-7/8"	6"
	[57mm]	[149mm]	[152mm]
13242	2-1/2"	6-3/8"	8"
	[64mm]	[162mm]	[204mm]
13250	3-1/8"	6-7/8"	10"
	[79mm]	[175mm]	[254mm]
13269	3-3/4"	7-3/8"	12"
	[95mm]	[187mm]	[305mm]
13277	4-3/8"	8-1/4"	14"
	[111mm]	[210mm]	[356mm]
13218	5"	8-7/8"	16"
	[127mm]	[225mm]	[406mm]

ROUGH-IN:

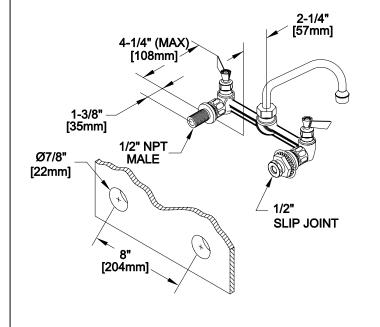

8" C/C BACKSPLASH FAUCET

SPECIAL CONFIGURATION CHECK BASE MODEL AND OPTIONS <u>SPEC. 13234 REV. D</u>

W/6" SWING SPOUT W/8" SWING SPOUT W/ 10" SWING SPOUT

W/ 12" SWING SPOUT □ 13277 W/ 14" SWING SPOUT

□ 13218 W/ 16" SWING SPOUT

OPTIONS OR MODIFICATIONS:

☐ SUPPLY LINES (24" OR 36") CIRCLE LENGTH

☐ DJ SUB-ASSY (7-1/4" OR 13") CIRCLE LENGTH

☐ ELBOWS

☐ VANDAL RESISTANT KIT

☐ HANDLES (CROSS OR WRIST) CIRCLE STYLE

□ OTHER

FEATURES

CONTROL VALVE

* 8" C/C BACKSPLASH MOUNT

* SWIVELLING SEAT DISKS

* HOT SIDE STEM - RIGHT HAND

* COLD SIDE STEM - LEFT HAND

* STAINLESS STEEL SEATS

* STAINLESS STEEL SEAT SCREWS

* STAINLESS STEEL HANDLE SCREWS

* 1/2" SLIP JOINT

SYSTEM LIMITS

* TEMP: 40°F MIN. TO 140°F MAX.

* PRESSURE: 200 PSI MAX. STATIC

* 2.20 GPM AT 80 PSI

SHIPPING WEIGHT

* 5.0 LBS

FISHER MANUFACTURING COMPANY

TOLL FREE: 800-421-6162 - FAX: 800-832-8238 information@fisher-mfg.com - www.fisher-mfg.com