



Removable ice machine for easy service



Model configurations					
Ice storage capacity	Configuration	Dispense	Ice machine cooling	Item number	
90 lb (40.9 kg)	ice and water	Lever	air	110FB414A-L	
	ice-only	Lever	air	110FB414A-LI [†]	
	ice and water	Lever	water	110FB414W-L	
	ice and water	SensorSAFE	air	110FB414A-S	
	ice-only	SensorSAFE	air	110FB414A-SI [†]	
	ice and water	SensorSAFE	water	110FB414W-S	

[†] ENERGY STAR* certified

Ice production				
Temperatures air/water	70/50 F (21/10 C)	90/70 F (32/21 C)		
Air-cooled	425 lb (193.0 kg)	340 lb (154.4 kg)		
Water-cooled	380 lb (172.5 kg)	330 lb (149.8 kg)		
Energy consumption per 100 lb (45.4 kg) ice	N/A	6.0 kWh air-cooled 4.3 kWh water-cooled		
Condenser water consumption	N/A	0.5 gpm (1.9 Lpm) at 70 F (21 C) water		
Water consumption	12.0 gal (45.4 L) of potable water per 100 lb (45.4 kg) of ice			

$Symphony\ Plus^{^{\mathsf{TM}}} \ \mathsf{ice\ and\ water\ dispenser}$

110 FB series freestanding with Chewblet[®] ice machine

Features

90 lb (40.9 kg) ice storage capacity

Removable air- or water-cooled ice machine with up to 425 lb (193.0 kg) daily production of Chewblet ice

- soft, chewable, compressed nugget ice is ideal for patient care
- Quiet Night™ sleep mode turns off ice machine when idle

Designed with sanitation in mind

- automatic self-flushing of ice machine removes impurities
- Agion* silver-based antimicrobial provides protection of key ice and water contact components¹
- one-hand lever or SensorSAFE™ infrared ice dispense

Dependable design, easy to service and clean

- cleaning and sanitizing of entire machine takes only 1 hour
- LED control board provides at-a-glance machine status
- panels are easily removed for accessibility to all components
- ice machine parts are common across all Symphony Plus dispensers
- stainless steel evaporator and auger deliver long life

Environmentally responsible

- R290 refrigerant has a low environmental impact and nominal global warming potential (GWP)
- continuous ice making process uses less electricity and water

Durable, attractive dispenser

- stainless steel cabinet with accent trim
- poly drain pan, grille and dispenser lid are corrosion-resistant
- secured top lid

Easy installation

- comes fully assembled and installs with three easy connections – electric, water and drain

Warranty

- 3 years parts and labor, 5 years compressor parts¹

Certifications (applied to all products unless otherwise noted)





Options and accessories²

Water filters (refer to form# 1058 and 8320)

Pressurized water sanitizing kits (refer to form# 1068)

SafeCLEAN Plus™ ice machine cleaner

1 x 8 oz (237 ml) bottle (item# 01147826)

6 x 8 oz (237 ml) bottles (item# 01149954)

Carton of 24 x 8 oz (237 ml) bottles (item# 01149962)

Nu-Calgon° IMS-III sanitizer (US only), 16 oz (0.5 L) bottle (item# 00979674) Additional Symphony Plus accessories (refer to price list)




¹ Refer to form# 4025 or 2155 for additional warranty information.


² Certifications do not apply to options and accessories.

Specification	
Ice storage capacity	90 lb (40.9 kg)
W1 Width, top	25.00" (63.5 cm)
W2 Width, bottom	26.25" (66.7 cm)
D1 Depth, top	28.25" (71.8 cm)
D2 Depth, drain pan	7.00" (17.8 cm)
D3 Depth, bottom	29.44" (74.8 cm)
H1 Height	68.12" (173.0 cm)
H2 Dispense height clearance	7.75" (19.68 cm)
Ventilation clearance	air-cooled models only – 3.00" (7.62 cm) right, left and rear, 4.00" (10.16 cm) top
Service clearance	air-cooled models – 12.00" (30.5 cm) top, 6.00" (15.24 cm) left side water-cooled units – 12.00" (30.5 cm) top
C1 115 V/60/1 electrical	7.2 amps, 8.1' (2.5 m) cord with NEMA 5-15 90° hospital-grade plug
C2 Potable water inlet, ice machine and dispenser	3/8" FPT
C3 Drain, dispenser	3/4" MPT
Refrigerant	air-cooled models – R290, 3.49 oz (99 g) water-cooled models – R290, 1.83 oz (52 g)
Water-cooled ice machine connections C4 condenser inlet C5 condenser drain	3/8" FPT 3/8" FPT
C6 Ice machine drain	3/4" MPT
Air temperature	50 -100 F (10 - 38 C)
Water temperature	45 - 90 F (7 - 32 C)
Potable water pressure	10 - 70 psi (69 - 483 kpa)
Condenser water pressure	10 - 125 psi (69-861 kpa)
Heat rejection	air-cooled models – 5000 BTU/hr water-cooled models – 1400 BTU/hr to air, 3600 BTU/hr to water
Water flow requirement for water-cooled models	0.25 gpm (0.95 lpm) at 50 F (10 C) 0.5 gpm (1.90 lpm) at 70 F (21 C) 1.25 gpm (4.73 lpm) at 90 F (32 C)
Approximate net weight	253 lb (115 kg)
Approximate ship weight	285 lb (129 kg)
NOTE: For indoor use only	

SHORT FORM SPECIFICATION: (Choose one) ___ lce and water or ___ ice-only dispenser to be Follett® automatic load in freestanding configuration, with 90 lb (40.9 kg) of storage, water station and (choose one) ___ air- or ___ water-cooled ice machine in base. Environmentally responsible R290 ice machine mounted in base and to be removable as one unit for cleaning and maintenance. Ice machine to produce approximately 425 lb (193.0 kg) per day of Chewblet compressed nugget ice at air temp. of 70 F (21 C), water temp. of 50 F (10 C). Ice machine equipped with automatic self-flushing and Quiet Night sleep mode. Dispenser to have automatic bin level control to start and stop ice machine and separate circuitry to allow dispensing to continue with ice machine removed. Dispenser equipped with 6.00" (15.24 cm) adjustable legs, flanged feet and lightweight plastic top that allows full access to the ice storage area for manual loading of back-up ice. Storage area to be insulated with CARB compliant non-HFC foam. 8.1' (2.5 m) cord and NEMA 5-15 90° hospital-grade plug provided. NSF and UL listed.

Dimensional drawing

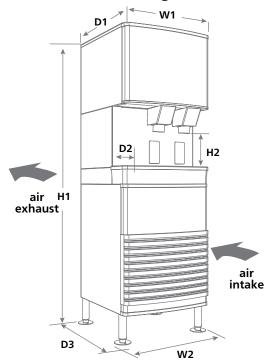

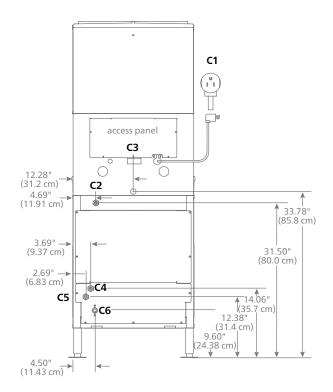

¹ Disclaimer: Antimicrobial protection is limited to the treated components and does not treat water or ice.

ENERGY STAR and the ENERGY STAR mark are registered trademarks owned by the U.S. Environmental Protection Agency.

Agion is a registered trademark of Sciessent LLC.

Calgon is a licensed tradename distributed by Nu-Calgon, in the United States. SYMPHONY PLUS, SENSORSAFE, SAFECLEAN PLUS and QUIET NIGHT are trademarks of Follett Products, LLC.

CHEWBLET and FOLLETT are registered trademarks of Follett Products, LLC, registered in the US. Follett reserves the right to change specifications at any time without obligation. Certifications may vary depending on country of origin.



