



GAS RETHERMALIZER



IRT-18

(Shown with optional casters)

MODEL NUMBERS

IRT-14
IRT-18



Special stainless steel alloy vessel
withstands strong salt
concentrations.



Stainless steel cooking rack
included

RETHERMALIZER FEATURES

- Water replacement can be adjusted from 1 GAL (3.8 L) per hour to 3 GAL (11 L) per minute depending on specific needs.
- Available with a manual timer or computer controls with multiple time feature for different product drop times.
- Low water level shut off.
- Water pressure regulator.

STAINLESS STEEL VESSEL

- Large 18" x 14" (457 x 356 mm) cooking area.
- Vessel sides are robotically welded stainless steel to virtually eliminate leaks.
- 1-1/4" (32 mm) full port drain valve empties frypot quickly and safely.
- Stainless steel cooking rack to hold a variety of bag sizes.
- Vessel is 16 gauge 317 alloy stainless steel

EXTERIOR FEATURES

- Stainless steel front, door, sides, back and vessel.
- Welded and polished stainless steel seams.
- Full bottom chassis provides structural support.
- Plate mounted 6" (152 mm) heavy duty stainless steel legs or optional casters assure secure support.
- One year parts and labor warranty. Limited warranty on frypot, stainless steel frypot is five years pro-rated.




1128 Sherborn Street | Corona, CA 92879 | 800.343.7790 | imperialrange.com | imperialsales@imperialrange.com

© 2026 Imperial Commercial Cooking Equipment Imperial reserves the right to change specifications at any time without prior notice and without any obligation for past or future equipment purchases. Visit www.imperialrange.com for specification updates



GAS RETHERMALIZER

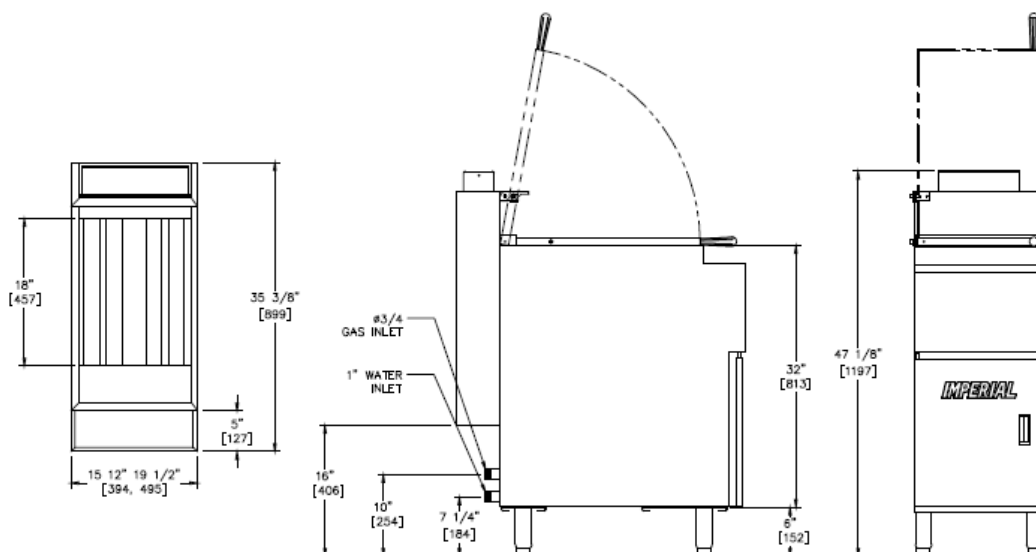

GAS RETHERMALIZER

MODEL	WATER CAPACITY	BTU'S	SHIP WEIGHT LBS (KG)	CRATED DIMENSIONS
IRT-14	12 GAL (45 L)	105,000 (31)	270 (122)	35" (899)H x 40" (1016)D x 22" (559)W
IRT-18	16 GAL (61 L)	140,000 (41)	320 (145)	35" (899)H x 40" (1016)D x 22" (559)W

Notes: Measurements in () are metric equivalents.

CLEARANCE REQUIREMENTS

For use only on non-combustible floors. Legs or casters are required for non-combustible floors; or 2" (51 mm) overhang is required when curb mounted. Provide 0" clearance from non-combustible surfaces and 6" (152 mm) from combustible surfaces.

OPTIONS AND ACCESSORIES



#40247 Rack Basket



#40248 Suitcase/Envelope



#39387 Basket



#10-39948 Casters
(Set of 4, 2 with brakes)



MADE IN USA



1128 Sherborn Street | Corona, CA 92879 | 800.343.7790 | imperialrange.com | imperialsales@imperialrange.com

©2026 Imperial Commercial Cooking Equipment Imperial reserves the right to change specifications at any time without prior notice and without any obligation for past or future equipment purchases. Visit www.imperialrange.com for specification updates