

# XpressChef™

Project #: \_\_\_\_\_

Item #: \_\_\_\_\_



## High Speed Oven XpressChef™ 3i Series

### Superior cooking results FAST!

- Enhanced cavity airflow for perfect browning & crisping
- 3000W impingement enhances browning. Easily adjustable 0-100% fan speed
- 95° - 270°C (200° - 520°F) temperature range cooks a variety of items
- 1000 or 2000W top antenna feed microwave system heats quickly, reduces cooking time.

### Minimized footprint, maximized cavity design

- Compact footprint fits on 71cm (28") deep counter
- Flexibility to install with or without 10cm (4") leg kit
- Easily accommodates a 30cm (12") pizza

### Multi-language universal operation, with programming flexibility:

- Touchscreen and programming software supports 25 languages
- Image-based menu selection eliminates language and literacy barriers
- Connectivity Standard: WiFi, Ethernet, and Smart USB standard

### Appropriate for front-of-house display

- Sleek, contemporary styling
- True-Touch™ HD Touchscreen. Fully customizable 178mm (7") smartphone-like display
- Catalytic converter built-in for ventless operation
- Quiet operation: fan speeds auto-adjust based on operation mode

### Safe operation and simple cleaning

- Inner door drops down below cooking surface for safe removal of food from cavity
- Smooth door surface allows for direct application of approved cleaners
- Non-stick oven liners preinstalled for easy cleaning\*\*\*
- Clean magnetic air filters in one-step
- Automatic Voltage Sensor adjusts to the power supply. (North America only)
- Rapid cool down allows for expedited end-of-day cleaning

### XpressChef™ 3i Series | Heavy Volume This category of high speed oven is ideal for...

#### Applications

- Convenience Stores
- Healthcare
- Delis
- Satellite Locations
- Hotel Room Service
- QSR
- Coffee Shops
- Snack Bars
- Bars/Pubs

#### Through put potential (per hour)

Food item	1000W	2000W
30cm (12") frozen pizza	18	21
15cm (6") toasted sandwiches	60	80
Grilled fresh Salmon	22	28
0.45kg (1 lb.) fresh shrimp	55	55
Toasted Bagel	120	120
Chicken wings	15	24
Quesadillas	65	70

#### Location of Oven(s):

- Kitchen countertop
- Front-of-house countertop
- Equipment stand
- Oven stacking cart (available accessory)

All ACP, Inc. commercial ovens are supported by our Culinary Center. Do not hesitate to contact us for any questions regarding food preparation, menu development and cooking times: [testkitchen@acpsolutions.com](mailto:testkitchen@acpsolutions.com)



#### Included Accessories:

- Cook plate (CP10)
- Compact oven paddle (PA10R)
- Non-stick liners (TL10R\*\*\*)

#### Optional Accessories

- Panini grill plate (RGR10)
- Panini Press (PRS10R)
- Pizza Stone(ST10R)
- 4" (102mm) Leg kit (LG10)
- Oven paddle (PA10)
- Non-stick liners (TL10R)
- Non-stick baskets (TB10S, SB10S, MB10S)
- Back Cover Panel (BC10R)
- Top storage shelf (TS10R)
- Stainless dual-oven stacking cart (SC10R)
- Stainless cart/equipment stands: (CA24, CA30)
- Oven Cleaner and Shield Protectant (CL10\*, SH10\*, CL10W\*\*, PR10W\*\*)

#### Service

All products are backed by the ACP, Inc. 24/7 ComServ Support Center

#### Warranty

Warranty Certificate for this product can be found on the ACP, Inc. website at [www.acpsolutions.com/warranty](http://www.acpsolutions.com/warranty)

#### Safety and Sanitation

This ACP, Inc. product meets and exceeds safety and sanitation standards set for commercial microwave ovens by UL, ETL, NSF, CSA, FDA, ETL EU and CE



AIA File #:

Specification #:

\*Only shipped in U.S.A.

\*\* Only shipped in Europe

\*\*\* Select models only

225 49th Ave. Dr. SW Cedar Rapids, IA 52404 U.S.A.

800-233-2366

319-368-8120


Fax: 319-368-8198

[www.acpsolutions.com](http://www.acpsolutions.com)



© 2021 ACP, Inc.  
Cedar Rapids, Iowa 52404

# XpressChef™ 3i Series | High Speed Oven

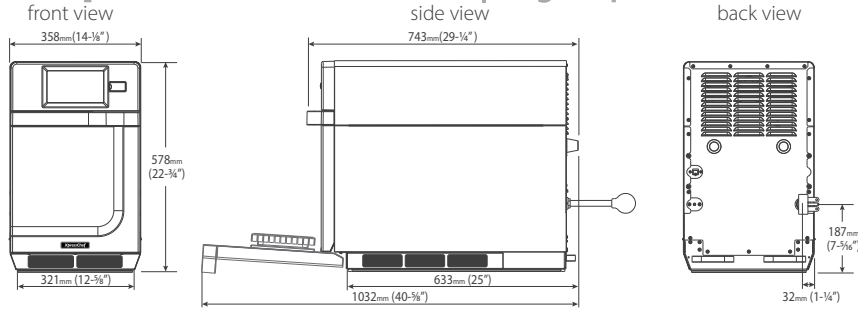

Drawings available from  
KCL CADlog - techs@kclcad.com

## Dimensions

<b>Exterior</b>	H 578 (22 3/4")	W 358 (14 1/8")	Df 743 (29 1/4")
<b>Cavity</b>	H 178 (7")	W 312 (12 1/4")	D 312 (12 1/4")
<b>Usable Cavity Space</b>	17.2 liter (0.61 cubic ft.)		
<b>Door Depth</b>	1032 (40 5/8"), drop down door		
<b>Installation Clearances</b>	Top: 51 (2")	Sides: 13 (1/2")	Back: None
<b>Shipping Carton</b>	H 677 (26 5/8")	W 584 (23")	D 883 (34 3/4")
<b>Weight</b>			
<b>Model Type</b>	<b>Product Weight</b>	<b>Ship weight (approx.)</b>	
2x Magnetron	61 kg (134 lbs.)	69 kg (152 lbs.)	
1x Magnetron	53 kg (116 lbs.)	61 kg (134 lbs.)	

## Features

<b>Configuration</b>	Countertop
<b>Stackable</b>	Yes, with kit
<b>Display</b>	178 (7") Capacitive Touch, High resolution LCD display
<b>USB Port</b>	Yes
<b>Connectivity</b>	Wifi and Ethernet
<b>Program Menu</b>	Tab & Multi-level menu capability
<b>Menu Capacity</b>	1200+ items
<b>Max. Cooking Time</b>	99:99
<b>Temperature Range</b>	95° - 270°C (200° - 520°F)
<b>Microwave Distribution</b>	Rotating antennas, top
<b>Fan Speed</b>	0-100%
<b>Power Levels</b>	11
<b>Defrost</b>	Yes, microwave only, power level 2
<b>Time Entry Option</b>	Yes
<b>Stage Cooking</b>	Yes, 4
<b>Catalytic Converter</b>	Yes#
<b>Automatic Voltage Sensor</b>	Yes (North America only)
<b>Air Filter</b>	3 removable, with clean filter reminder
<b>Rack</b>	Removable cooking surface
<b>Door Opening</b>	Pull down, ergonomic handle
<b>Exterior Finish</b>	Stainless steel and Painted Steel
<b>Interior Finish</b>	Stainless steel

ACP, Inc. requires installing a type D circuit breaker for all high-speed oven installations.

Measurements are millimeters. Measurements in ( ) are US Standard

\* IEC 60705 Tested

† Includes handle

‡ Catalytic convertor filters grease and odors from the air. This product conforms to the Ventless Operation Recommendations set forth by NFPA96 using EPA202 test method

EMEA = Europe, the Middle East and Africa; APAC = Asia Pacific and Oceania; LATAM = Latin America

Also available in colors. For details:

<https://acpsolutions.com/xpresschef/xpresschef-3i/>

## Electrical Configuration

Region	Model#/UPC Code	Non-Stick Liners Installed	Power Output*			Power Source	Plug Configuration	Cord Length	Frequency	Magnetron
			Power Consumption	Microwave	Impingement					
North America single phase	<b>MRX1</b> 728028422825	No	3600 W, 18.2 A	1000 W*	3000 W	208-240 V, 60 Hz, 20 A, single phase	NEMA 6-20	1.5m (5 ft.)	2450 MHz	1
North America single phase	<b>MRX2</b> 728028422849	No	5950 W, 28.6 A	2000 W*	3000 W	208-240V, 60 Hz, 30 A, single phase	NEMA 6-30	1.5m (5 ft.)	2450 MHz	2
EMEA, APAC, LATAM single phase	<b>MRX51</b> 728028422863	Yes	3680 W, 16 A	1000 W*	3000 W	230-240 V, 50 Hz, 16 A, single phase	CEE 7/7 "Schuko"	1.5m (5 ft.)	2450 MHz	1
EMEA, APAC, LATAM single phase	<b>MRX52</b> 728028422887	Yes	5950 W, 28.6 A	2000 W*	3000 W	230-240 V, 50 Hz, 32 A, single phase	IEC 309	1.5m (5 ft.)	2450 MHz	2
EMEA, APAC, LATAM multi phase	<b>MRX523</b> 728028422900	Yes	5950 W, 16 A	2000 W*	3000 W	400V, 50 Hz, WYE, 16 A, 3 phase, 5 wire	IEC 309	2.4m (8 ft.)	2450 MHz	2
EMEA (UK), APAC single phase	<b>MRX51U</b> 728028423006	Yes	2450 W, 13 A	1000 W*	3000 W	230-240 V, 50Hz, 13 A, single phase	BS1363/A	1.5m (5 ft.)	2450 MHz	1
Australia single phase	<b>MRX51A</b> 728028423044	Yes	3250 W, 15 A	1000 W*	3000 W	230-240 V, 50Hz, 15 A, single phase	A53112	1.5m (5 ft.)	2450 MHz	1
Brazil single phase	<b>MRX1B</b> 728028423211	No	3550 W, 16.7 A	1000 W*	3000 W	220V, 60 Hz, 16 A, single phase	NBR 14136	1.5m (5 ft.)	2450 MHz	1
Brazil single phase	<b>MRX2B</b> 728028423259	No	5550 W, 25.8 A	2000 W*	3000 W	220V, 60 Hz, 32 A, single phase	IEC 309	1.5m (5 ft.)	2450 MHz	2
Saudi Arabia single phase	<b>MRX1SA</b> 728028423235	No	3550 W, 16.7 A	1000 W*	3000 W	220V, 60 Hz, 16 A, single phase	Direct Wire	1.5m (5 ft.)	2450 MHz	1
Saudi Arabia single phase	<b>MRX2SA</b> 728028423273	No	5550 W, 25.8 A	2000 W*	3000 W	220V, 60 Hz, 32 A, single phase	Direct Wire	2.4m (8 ft.)	2450 MHz	2



225 49th Ave. Dr. SW, Cedar Rapids, IA 52404 U.S.A.  
800-233-2366 • 319-368-8120 • Fax: 319-368-8198  
[www.acpsolutions.com](http://www.acpsolutions.com)

Part No. 20218006

Updated 02/24/2021

© 2021 ACP, Inc., Cedar Rapids, Iowa 52404

an Ali Group Company



The Spirit of Excellence

Specification #:

AIA File #: