



UR60B-D2

Undercounter 60" Refrigerator
with One Door and Two Drawers



UR60B-D2
08/04/26
Item # 13631

W x D x H
60" x 30" x 33.75"*
*with 4" casters



Dimensions / Capacity

Interior Storage Capacity (CF) (AHAM)

Two-Section UR60B-D2

15.1 ft³

Overall Width x Depth (including 1" bumper)

60" x 31"

Height (including 4" casters)

33.75"

Door Opening Width x Height

25.5" x 23"

Depth with Door Fully Open (including 1" bumper)

58.5

Depth with Drawer Fully Open (including 1" bumper)

52"

Adjustable shelves / Shelf Dimensions (W x D)

1 / 27.25" x 16"

Crated Weight

292 lbs.

Crated Length x Width x Height

62.5" x 34" x 36.5"

NMFC_LTL Class

53125-05_125

Electrical / Refrigeration

Voltage

115/60/1

HACR Breaker

15.0 Amps

Electrical Connection (NEMA)

5-15P

Voltage Range

104-126

Ambient Temp. Range

45° to 100°F

Control Setpoint Range

32° to 52°F

Amperage

3

Energy Consumption (kWh/day) @NSF

1.75

Heat Rejection (BTU/Hr.) @NSF

249

Approx. Nominal Compres. BTU/HR (HP)

798 (1/5HP)

Refrigerant / Charge Amount (oz)

R290 (2.3 oz)

Options

☐ 2.25" Casters

☐ Stainless steel back

☐ 6" Casters

☐ Drawer divider bars

☐ Overshelves

☐ Stainless steel shelves

☐ Foot pedal (right mount)

☐ Foot pedal (left mount)



Seven year warranty
on labor, parts, and
compressor. Valid in
United States, Canada,
Puerto Rico and U.S.
Territories.

For more information, please visit
hoshizakiamerica.com/support/warranty/

Item #: _____
Project: _____
Qty: _____
AIA#: _____

Features

- Engineered to maintain NSF-7 temperatures in 100°F ambient.
- Stainless steel exterior front, sides, and top with stainless steel interior sides, back, and floor
- Front breathing air flow design
- Environmentally friendly R290 hydrocarbon refrigerant
- Cabinet and drawers are insulated with 2" CFC free, foamed in place polyurethane
- Drawer module frames, acetal rollers, and drawer stops are formed of heavy duty stainless steel all welded construction and securely fastened in the cabinet
- Top drawers will accommodate (1) 12 x 20 full size pan and (2) ¼ size pans. Bottom drawer will accommodate (1) full size pan
- Top and bottom drawers allow for 6" deep pans
- Extruded aluminum flush mount drawer handle
- Magnetic drawer gasket is easily removable for cleaning
- Hot gas condensate removal
- E-coated evaporator coil
- Standard with 4" casters (two with brakes)
- 10 ft. cord and plug

Note: Made to order. Allow 4-6 weeks.

*Door or drawer can be located in any section of the cabinet.
Location must be indicated at time of ordering.*

If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

Hoshizaki reserves the right to change specifications without notice.




UR60B-D2

Undercounter 60" Refrigerator
with One Door and Two Drawers




UR60B-D2
08/04/26
Item # 13631


FRONT VIEW

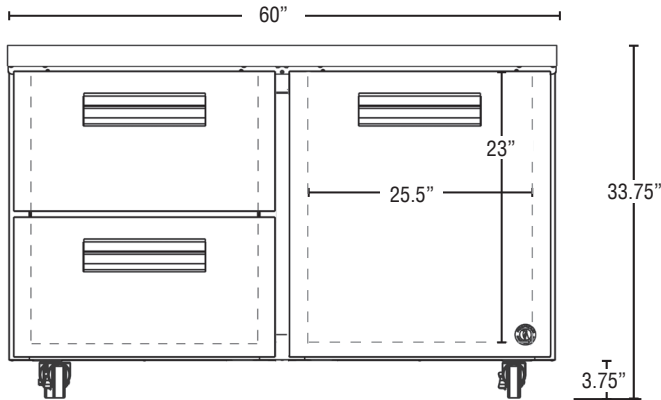

SIDE VIEW

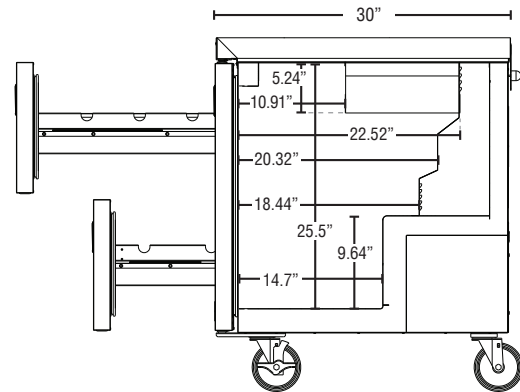

PLAN VIEW

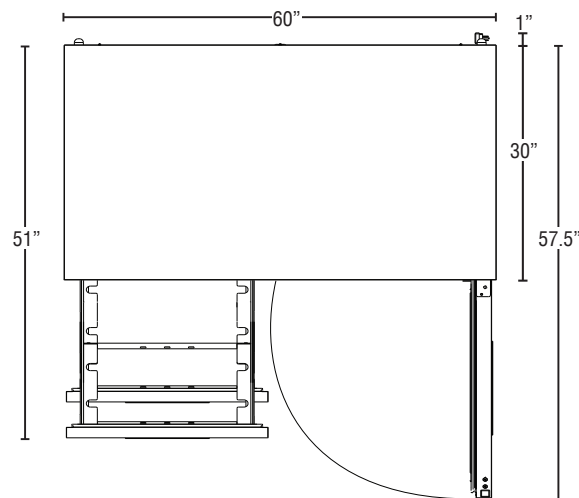

Cabinet Construction

The exterior cabinet top, front, and sides, are constructed of high quality stainless steel. The exterior back and bottom are constructed of coated steel. The cabinet interior features stainless steel back, sides, and floor with an ABS top. One heavy duty epoxy coated shelf per section is standard. Mounted on anodized aluminum pilasters the shelves are adjustable in $\frac{1}{2}$ " increments. Cabinet walls and doors are insulated with 2" of environmentally friendly, CFC free, foamed in place polyurethane. 4" polyolefin, stem casters (two with brakes) are standard.

Drawer Construction

The bottom drawers will accommodate 6" deep pans. Full size pans in the top drawer can be oriented longways from front to back or left to right. The top drawer will accommodate 4" deep pans with either orientation. The top drawer will also accommodate 6" deep full-size pans when oriented longways from left to right and provide capacity for (2) $\frac{1}{4}$ size pans 4" deep in the rear of the drawer. HS-5433 divider bar is recommended for this configuration. Drawer frames are formed of heavy duty stainless steel and securely fastened in the cabinet. The drawer slides are heavy duty stainless steel with acetal rollers to prevent metal to metal contact between the drawer slides and reduce wear. The drawer slides have a dynamic load capacity of 175 lbs. and have been life tested (fully loaded) three hundred thousand openings and closings without showing significant wear. The flush mount handles are constructed of extruded aluminum. Snap-in magnetic drawer gaskets are durable and easily removed for cleaning.

Refrigeration System

The high efficiency refrigeration system is self-contained with an E-coated evaporator for extended life. Condensate removal is accomplished with an energy efficient non-electric evaporation system. A capillary tube controls the flow of environmentally friendly R290 refrigerant through the evaporator. Refrigeration system utilizes an "off cycle" defrost to eliminate any ice on the evaporator coil. 115 volt units are equipped with a ten foot cord and plug (20.0 amps or less).