

Project _____
 Item _____
 Quantity _____
 CSI Section 11400
 Approved _____
 Date _____

F17CP/F17FCP

Self-Contained Refrigerated & Freezer Base Equipment Stands

Models

- | | |
|--|--|
| • F17C52P 52" Refrigerated Equipment Stand | • F17C78P 78" Refrigerated Equipment Stand |
| • F17C60P 60" Refrigerated Equipment Stand | • F17C87P 87" Refrigerated Equipment Stand |
| • F17C62P 62" Refrigerated Equipment Stand | • F17C94P 94" Freezer Equipment Stand |
| • F17C73P 73" Refrigerated Equipment Stand | • F17C110P 110" Refrigerated Equipment Stand |
| • F17C75P 75" Refrigerated Equipment Stand | • F17C94P 94" Freezer Equipment Stand |



F17C68P

Standard Features

- Top is 18-gauge stainless steel, with integral front marine edge
- Cutting board brackets with 1.25" thick x 9.50" deep maple cutting board
- High density environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane foam throughout unit
- Snap in dart style vinyl magnetic gasket
- Drawer handles are recessed black plastic and held in with a positive lock system
- 6.12" adjustable full stainless steel legs
- 8' cord and plug supplied
- Interior refrigerated base cabinet section to maintain 36° to 41°
- Digital thermometer
- Drawer system holds 12" x 20" x 4" deep hotel pans on refrigerated models. 12" x 20" x 8" deep hotel pans for freezer models.
- Environmentally friendly R290 refrigerant
- One year parts and 90 day labor standard warranty

Options & Accessories

- Stainless steel back
 - Stainless steel end
 - Laminate facing (drawers only)
 - Laminate back
 - Laminate end
 - Casters
 - Doors, except 32"
 - Single drawer in lieu of two high drawers (8" deep pans) for refrigerated bases
 - Available in R404a refrigerant (contact factory)
 - Remote refrigeration (contact factory)
 - Locks
 - 220V/50 cycle electrical*
 - 8" deep clear polycarbonate pans in full, 1/2 and 1/3 size dimensions available
 - Celsius readout for electronic control
- *Inclusion of these options will alter the electrical specifications of unit*

Specifications

Stainless steel top is constructed with integral front marine edge nosing and rear backplash. Stainless steel bars run front to back on both sides for support and spline purposes. Stainless steel interior sub-top is made integral with the top by injecting 2.00" of high density environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane foam between the tops. Cutting board brackets are attached to each side and house a 1.25" thick x 9.5" deep maple cutting board.

Refrigerated base interior back and bottom are constructed of stainless steel. Exterior back and bottom are made of galvanized steel. Exterior sides made of stainless steel. Both left and right interior sides are formed of ABS plastic. The base is injected with 2.00" of high density polyurethane foam between the exterior and interior. Refrigerated base fronts are made of .095" thick ABS thermoformed plastic and backed up by ridged polyurethane water blown injection molded frames.

Single units are supplied with wall-mounted bracket and threaded rod to allow installation of the unit against a solid surface.

Drawer system is sized to hold 12" x 20" x 4" deep hotel pans and smaller fractional pans on refrigerated models. Drawer system is sized to hold 12" x 20" x 8" deep hotel pans

and smaller fractional pans on freezer models and available on refrigerated models. Drawer system is all stainless steel construction. Tracks are designed with a stay shut feature that holds the drawer gasket tight to the base front on uneven floors. Exterior drawer fronts are made of stainless steel; and an interior made of ABS plastic with formed in channels to house the snap-in dart style santoprene gasket. Each drawer front is injected with 1.87" of high density polyurethane foam between the exterior and interior. Handles are recessed black plastic and held in with a positive lock system.

Legs: Unit is mounted on 6.12" adjustable stainless steel legs.


Refrigeration system uses R290 refrigerant, and maintains 36°F (2°C) to 40°F (4°C) interior cabinet temperature at 100°F (38°C) ambient room temperature. Interior cabinet is cooled with mullion style blower coils (coated) mounted between each door/drawer section for even air and temperature control.

An electronic temperature control and pre-wired condensing unit with hot gas condensate evaporator are installed in the machine compartment. The digital Thermometer with stainless steel guard is located in the Top nosing above the machine compartment (standard on right).


Electrical connections are 115V-60Hz-1PH. Units are supplied with an 8' cord and plug.




F17CP/F17FCP







F17C52P




F17C60P




F17C62P




F17C73P




F17C75P

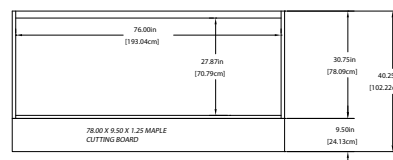






F17C78P




F17C87P





F17C110P

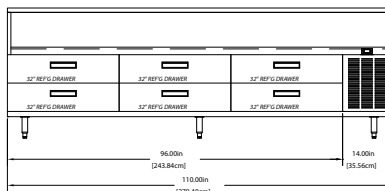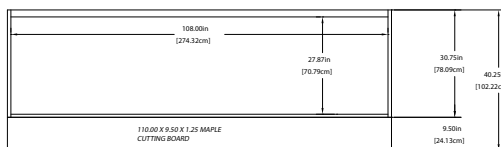

F17CP/F17FCP

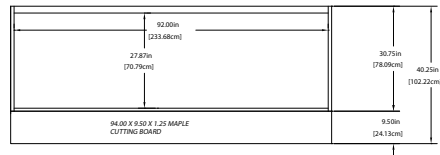


F17FC94P




TYPICAL END
F17CP/F17FCP


Mechanical Data




SELF CONTAINED



REMOTE



Drawer Details

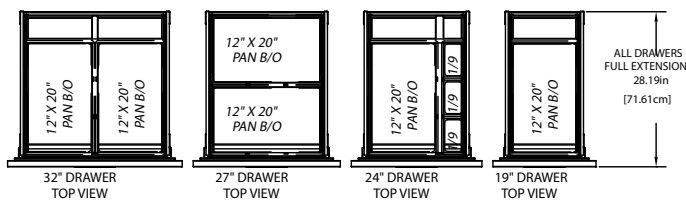

F17CP/F17FCP

Specifications

Model	Number of Drawers	12" x 20" Pan Capacity	BTU Load Base/ Heat of Rejection	BTU Sys. Cap Base @ 100F	H.P.	V/Hz/Ph	Amps	Nema Plug	Ship Weight	KWH
F17C52P	(2) 32"	4	367	1600	0.20	115/60/1	2.9	5-15P	410lbs/186kg	0.854
F17C60P	(2) 19" & (2) 27"	6	473	1600	0.20	115/60/1	2.9	5-15P	460lbs/208kg	0.975
F17C62P	(2) 24" & (2) 24"	4	488	1600	0.20	115/60/1	2.9	5-15P	460lbs/208kg	0.975
F17C73P	(2) 27" & (2) 32"	8	574	2074	0.25	115/60/1	4.8	5-15P	500lbs/227kg	1.101
F17C75P	(2) 27" & (2) 32"	8	590	2074	0.25	115/60/1	4.8	5-15P	580lbs/263kg	1.101
F17C78P	(4) 32"	8	613	2074	0.25	115/60/1	4.8	5-15P	580lbs/263kg	1.219
F17C87P	(2) 19" & (4) 27"	10	755	2508	0.25	115/60/1	4.8	5-15P	625lbs/283kg	1.447
F17C110P	(6) 32"	12	935	2893	0.35	115/60/1	6.3	5-15P	750lbs/340kg	1.777
F17FC94P	(4) 32"	8	1271	2567	(2) 0.35	115/60/1	7.6	5-15P	710lbs/322kg	3.805

Model	Number of Drawers	12" x 20" Pan Capacity	BTU Load Base	Evap. Cap. BTU/TD/Temp	V/Hz/Ph	Amps	Nema Plug	Ship Weight
17R44V	(2) 32"	4	452	120/4°/33°	115/60/1	6	5-15P	300lbs/136kg
17R52V	(2) 19" & (2) 27"	6	452	120/5°/32°	115/60/1	6	5-15P	350lbs/159kg
17R70V	(4) 32"	8	726	120/6°/31°	115/60/1	6	5-15P	450lbs/204kg
17R79V	(2) 19" & (4) 27"	10	868	240/4°/33°	115/60/1	6	5-15P	525lbs/238kg
17R102V	(6) 32"	12	1143	240/5°/32°	115/60/1	6	5-15P	610lbs/276kg
17FR94V	(4) 32"	8	1879	160/17	115/60/1	10	5-15P	560lbs/254kg

Welbilt reserves the right to make changes to the design or specifications without prior notice.