

Project Name:	Location:	AIA #:
Item #:	Qty:	Model #:
		SIS #:

TB-SERIES - STAINLESS STEEL EXTERIOR & INTERIOR



Rear view shown

**60" WIDE MODEL
TB060FL4-1**

SPECIFICATIONS

DIMENSIONAL DATA	
1/6 Size Pans	32
Length in.	60 (152.4 cm)
Overall Depth in. ³	52-3/16 (132.6 cm)
Overall Height in. ²	34 (86.4 cm)
ELECTRICAL DATA	
Horsepower ¹	1-1/4
Amps	17
Voltage	115/60/1
NEMA	5-20P
REFRIGERATION DATA	
Refrigerant	R-290
Charge Amount oz.	3.8 (107.7 g)
BTU	5150







When ordering please specify:
Voltage, Hinging, and Options



NEMA 5-20P

1. Based on 90°F ambient & 20°F evaporator.
2. Overall height includes 4" (10.2 cm) for casters.
3. Overall depth includes 10" deep cutting boards on both sides.

PLAN VIEW

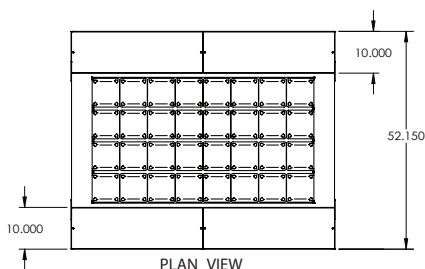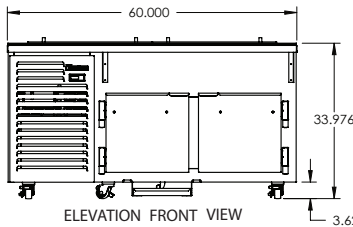

Models listed to applicable UL, CSA, and NSF standards by an approved NRTL. Consult the factory or unit data plate for additional information.

Specifications subject to change without notice. Chart dimensions are rounded up to the nearest 1/16" (centimeters rounded up to the nearest tenth).



TB-SERIES

DUAL-SIDED FULL-SIZE
GLYCOL PREP TABLE



Project Name:	Location:	AIA #:	
Item #:	Qty:	Model #:	SIS #:

REFRIGERATION SYSTEM

- Self-contained, side-mounted system uses environmentally friendly, minimal GWP R-290 refrigerant
- Front-breathing system allows zero-clearance installation
- Advanced glycol system tested to exceed NSF7 requirements
- Defrost and fan-free rail system
- High performance, balanced system operates at 34-38°F (1.1-3.3°C) to maintain consistent, food-safe temperatures for 24 hours with the lid open
- Allows overnight storage in the pan rail with the lid closed
- Specialized, clock-wise airflow design in cabinet base
- LED display for microprocessor control is water-resistant
- Easy to clean, front-facing condenser coil with removable, wire condenser filter for easy cleaning and coil protection
- Thermostatic expansion valve metering device
- High humidity evaporator coil located outside the food zone
- Hot gas evaporator defrost

CABINET CONSTRUCTION

- Stainless steel exterior and interior
- Single microprocessor control with LED temperature display for both pan rail and cabinet base
- (2) stainless steel lift-off rail covers
- Full-length 10" deep white polycarbonate cutting board per section on front and rear; 1/2" (1.3 cm) thick
- Exterior back and bottom are constructed of heavy gauge galvanized steel
- Horizontal finned T6 anodized aluminum chiller plates accommodate up to 6" deep third, sixth and ninth size pans (pans supplied by others)
- 7.6" (19.3 cm) chiller bar spacing
- Cabinet is insulated with an average of 2" (5.1 cm) thick high density, non-CFC foamed-in-place polyurethane
- Side, front and rear access panel for easy service and maintenance access
- A set of (6) 4" (10.2 cm) high plate casters; on adjustable channel system
- 9' (2.4 m) cord & plug provided

DOORS

- (3) stainless steel field reversible doors; (2) pass-thru and (1) standard, front hinged left/right and rear hinged left
- Stainless steel handles with gasket guard
- Guaranteed for life cam-lift hinges
- Guaranteed for life workflow door handles
- Doors are self-closing with a stay-open feature
- Standard door hinging on front left/right and rear left; other hinging available
- Magnetic, snap-in door gaskets

INTERIORS

- (2) adjustable, factory-installed coated wire shelves per section supported on shelf pins; load should not exceed 225 pounds (102 kg)

WARRANTY

Both a six-year parts and labor warranty, and an additional one-year compressor parts warranty (for a total of seven years) are provided standard

CAD and/or Revit Files Available

<https://traulsen.klccad.com>

Approved by:	Approved by:	Date:
--------------	--------------	-------