



"WE MAKE THE KITCHEN BETTER!"

ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois,
New Jersey, Ohio, Texas, Washington

Back Bar Coolers

MODELS:

**MBB23GR / MBB48GR / MBB59GR / MBB69GR /
MBB90GR**

Standard Features

- Stainless steel exterior & interior
- Electronic Temperature Controller
- Maintains temperatures between 35°F – 38°F
- Heavy duty Embraco compressor with environmentally friendly R290 refrigerant
- Slide out compressor assembly for easy maintenance
- Recessed door handle(s)
- Interior light(s)
- Magnetic door gasket(s) standard for positive door seal
- Door lock(s) standard
- Pre-installed epoxy coated shelves
- Pre-installed casters
- All models in this series, except MBB23GR can be fitted with 1.2", 1.5", 4", or 5" casters



MBB23GR



MBB48GR



MBB59GR



MBB90GR



MBB69GR

For the best results of food preservation we recommend setting your refrigerator between 35 °F to 38 °F

1. Don't forget to leave the unit some room to breathe!
2. Please clean the condenser frequently to give the unit more fresh air.



**3 YEAR PARTS AND LABOR WARRANTY
5 YEAR COMPRESSOR PART WARRANTY**



REV. 07/26



"WE MAKE THE KITCHEN BETTER!"

ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois,


New Jersey, Ohio, Texas, Washington

SPECIFICATIONS

Models	Door	Capacity (Cu.Ft.)	Shelves	Casters (inch)	Rated Current (A)	Voltage (V/Hz/Ph)	HP	Refrigerant	Exterior Dimensions (inch)	Net Weight (lb)	Gross Weight (lb)
MBB23GR	1	8.2	2	3.5	2.3	115/60/1	1/7	R290	23×29 ^{1/2} ×38 ^{4/5}	170	207
MBB48GR	2	13.4	4	2.5	2.3	115/60/1	1/7	R290	48×28 ^{1/10} ×40 ^{1/8}	192	240
MBB59GR	2	17.3	4	2.5	2.3	115/60/1	1/6	R290	57 ^{4/5} ×28 ^{1/10} ×40 ^{1/8}	214	262
MBB69GR	2	21.5	4	2.5	2.3	115/60/1	1/6	R290	68×28 ^{1/10} ×40 ^{1/8}	238	295
MBB90GR	3	30.1	6	2.5	2.8	115/60/1	1/6	R290	89 ^{3/10} ×28 ^{1/10} ×40 ^{1/8}	295	370


PLAN VIEW

MBB23GR

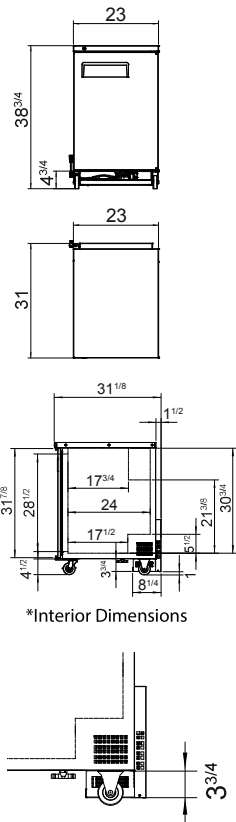


*Interior Dimensions


MBB48GR

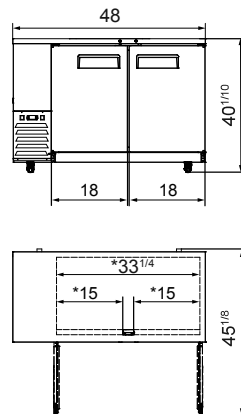



MBB69GR

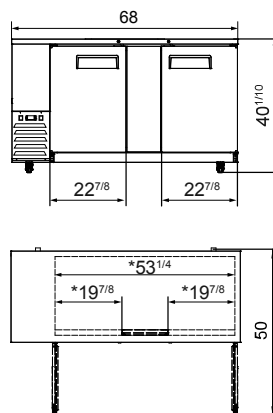

MBB59GR

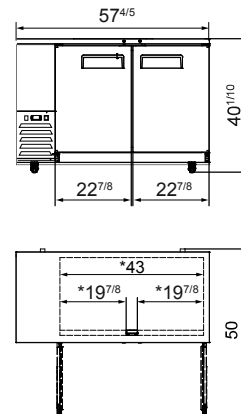

MBB90GR

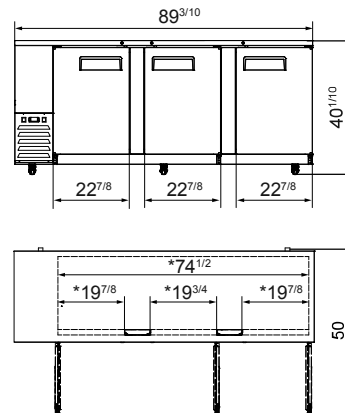

*Interior Dimensions

Note: The rear lower skirt extends 3-3/4" downward behind the casters. This design prevents caster removal.

Epoxy shelves



Door lock



Temperature control



Recessed handles



NEMA 5-15P



NEMA
15A/125V