

# SPR14PDXR

Product Family	Blast chillers
Subfamily	Chiller
Type	1400 l
Type of temperature control	Electronic
Temperature range	Positive -2°C / +8°C
Doors number	2
Panel type	Electro-mechanical
Hinge position	Right
Reversible door	Yes
Sides	With racks
Material	Stainless steel
Internal material	Stainless steel AISI 304
Refrigerating unit	Upper monobloc
Installation	Built-in
Door steel type	Normal
Handle type	Fixed
Handle material	Painted aluminium with anti-scratch and anti-corrosion treatment
Display	LCD
EAN code	8017709340346



## Target

Potential users	Bars/Cafes; Hotels; Restaurants/Catering; Butcher's shops; Meat processing industry; Hospitals; Schools; QSR
Industry	Gastronomy

## Aesthetics

Colour	Stainless steel
--------	-----------------

## Functions



Functions display	Fast cooling, Control lock, Alarms
Door open alarm	Yes
Temperature alarm	Acoustic and visual
Power failure alarm	Acoustic and visual
Probes failure alarm	Acoustic and visual
Usb	yes, with optional kit
HACCP data download	Yes

## Performance / Energy Label

			
<b>Refrigerant gas type</b>	R290	<b>GPW parameter</b>	3 (R290)
<b>Energy efficiency class</b>	C	<b>Tropicalised unit at 43°C</b>	Yes
<b>Annual energy consumption</b>	777 kWh/a	<b>Energy efficiency index EEI</b>	36 %
<b>Energy Consumption (E24h)</b>	2130 Wh	<b>Forced ventilation</b>	Yes
<b>Cabinet type</b>	Heavy-duty cabinet	<b>Noise level</b>	<49 dB(A) re 1 pW
<b>Climatic class</b>	5 (40°C - 40%)		

## Electrical Connection

<b>Power supply</b>	230V ~ / 1 A / 50Hz
<b>Frequency</b>	50Hz
<b>Plug</b>	(F;E) Schuko
<b>Nominal power</b>	245 W
<b>Power supply cable length</b>	160 cm

## Construction



<b>Net freezing capacity in litres</b>	935 l
<b>Width (mm)</b>	1275 mm
<b>Depth of the built-in niche</b>	690 mm
<b>Height with feet</b>	1470 mm
<b>Insulating body thickness</b>	80 mm
<b>Insulating door thickness</b>	60 mm
<b>Insulation material</b>	Polyurethane foam
<b>CFC/HCFC free</b>	Yes
<b>Shelves dimensions</b>	GN2/1
<b>Shelves pitch</b>	50 mm
<b>Maximum loading weight per shelf</b>	25 Kg
<b>Tray support and guides</b>	S/s wire for GN1/1
<b>Roll-over guides</b>	Yes
<b>Defrosting by hot gas</b>	Yes
<b>Defrost water evaporation</b>	Automatic with hot gas
<b>Internal air flow</b>	Yes
<b>Door opening</b>	180° with stop at 150°
<b>Automatic closing door</b>	Yes
<b>Automatic ventilation lock when opening door</b>	Yes
<b>Magnetic gasket</b>	Yes
<b>Roundend corner cold room</b>	Stainless steel
<b>No. of compressors</b>	1

## Equipment

<b>Grids</b>	6 GN2/1	<b>Door lock</b>	Yes
<b>Grid type</b>	GN2/1	<b>Internal light</b>	STRIP LED with low energy consumption
<b>Grids material</b>	Steel with plastic coating	<b>Wheels</b>	6 (3 with break)

## Logistic Information

Dimensions of the product HxWxD (mm)	2105x1440x845 mm
Dimensions of the packed product (mm)	2260X1500X890 mm
Net weight (kg)	216,000 kg
Gross weight (kg)	231,000 kg

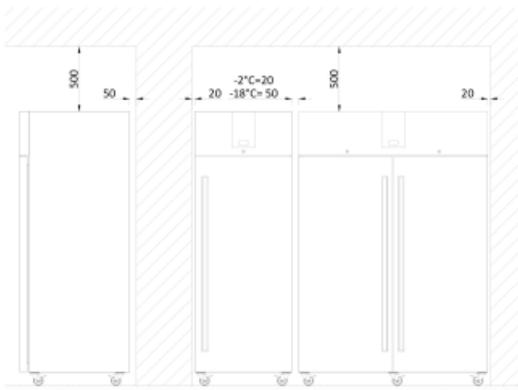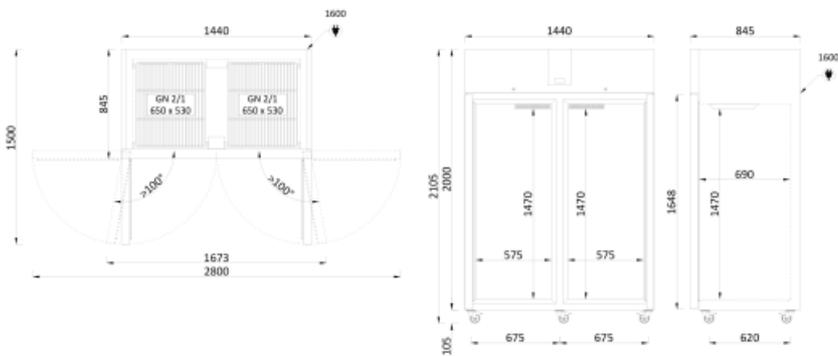

---

## Not included accessories

---



### KCAST6

6 wheels kit for 1400 mm refrigerated cabinet




### KSLIDES2X

Stainless steel support shelves kit for refrigerated cabinets with racks




### KSHELF1X

Stainless steel shelf kit



### KGRID1X

Stainless steel grid for 700 and 1400 l refrigerated cabinets. To be combined with the guides kit model KSLIDES2X for cabinets with racks.



### KGRID1P

Plastic grid for 700 and 1400 l refrigerated cabinets



### KFEET6

6 stainless steel feet kit



### KCABLEUK

Power cable with UK plug



### KCABLEAU

Power cable with UK plug

### KITBLE

Bluetooth connection kit

## Symbols glossary

---



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.

