SERV-WARE™ Product Spec Sheet

Range with Griddle

Item #
Project :
Qty :

Model No. SGR-4B-12G



SGR-4B-12G

Features:

- SGR-4B-12G - 4 Open top burners, 12” griddle, 1 oven
- 30,000 BTU per open top burners
- 31,000 BTU per oven with U-shaped burner
- Fully welded frame for stability
- Stainless steel front, sides and back riser
- Covered pilot and burner covers to prevent clogging from spillage
- Durable stainless steel pilot
- Easily removable heavy duty cast grates/12” x 12”
- Pull out crumb tray with rounded edges to prevent heat transfer
- Casters installed
- Full size sheet pan fits side-to-side or front-to-back
- Oven thermostat adjusts from 250° to 550° F
- 2 Oven racks and 4 rack positions
- Built for natural gas and supplied with LP conversion kit

Warranty Info:

One Year

- Parts & Labor on entire unit.
- Valid in United States.
- Valid for commercial use only.

1 YEAR PARTS WARRANTY 1 YEAR LABOR

Intertek Intertek

Conforms to UL471, CSA C22.2 and NSF 7 Standards.

Phone:(800).768.5953
Fax:(800).976.1299


www.servware.com

Copyright © 2026 Serv-Ware Products LLC

SGR-4B-12G Range with Griddle

SERV-WARE

Item #
Project :
Qty :

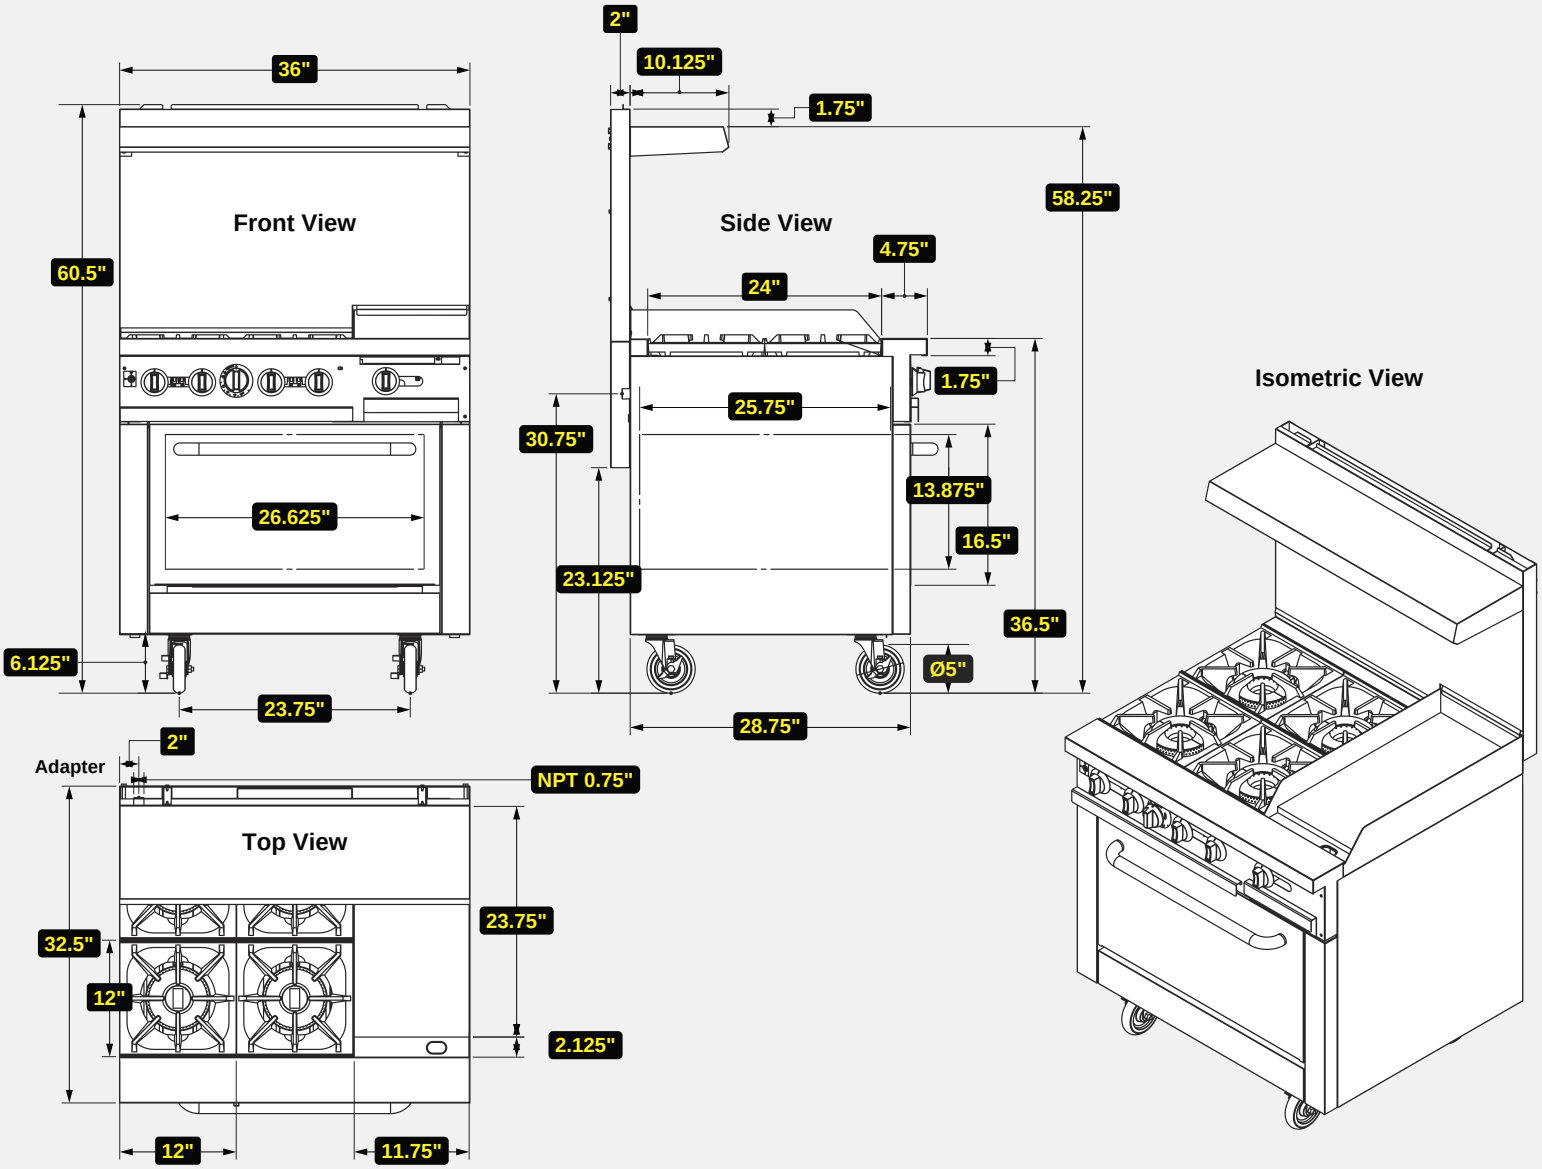

Technical Information:

MODEL #	DESCRIPTION	DIMENSIONS	WEIGHT/LBS.
		(W x D x H)	(Shipping)
SGR-4B-12G	4 Burner w/ 12" Griddle + Oven	36" W x 32.5" D x 60.5" H	540 lbs.

CONSTRUCTION

Stainless steel front, sides, back riser, high shelf, oven handle and bullnose. High temperature burner knobs with set screw. Casters installed. Porcelain door liner and oven bottom.

COOKING

Temperature Range	250°F – 550°F
Gas Line	¾
W.C. for Natural Gas	4 in.
W.C. for LP	10 in.

Intertek Intertek

Prop. 65 Warning for California Residents

WARNING: This product may contain chemicals known to the State of California to cause cancer, birth defects, or other reproductive harm.

SERV-WARE

Copyright © 2026 Serv-Ware Products LLC

Phone:(800).768.5953
Fax:(800).976.1299
www.servware.com