



WSB38X2



BOLT® Cordless Lithium Immersion Blender

Item # _____
 Model # _____
 Name _____
 SIS _____
 AIA _____



CORDLESS BOLT LITHIUM



MAIN FEATURES

- Cordless, rechargeable and powerful
- Operates under load for approximately 25 minutes before recharging
- Brushless DC motor for long life and quiet operation
- Two 10.8V lithium ion battery packs
- Variable speed from 5,000 to 13,000 RPM
- 7" removable, dishwasher-safe blending shaft
- Battery charging/docking station with 1.5-hour quick-charge circuit
- LED indicator lights for speed and battery charge status
- Ergonomic housing design
- Limited two-year motor warranty

ELECTRICAL

Voltage: Battery 10.8V

Charging Station 120V

Frequency: 50/60Hz

Amps: 0.5

Plug Type: NEMA 5-15P

Cord Length: 3 feet



SALES FEATURES

Enjoy unmatched convenience, mobility and versatility with the Waring® BOLT® Cordless Lithium Immersion Blender. Easily blend, mix and purée your best recipes with its variable speed settings from 5K to 13K RPM. Comes with a durable, 7-inch, removable, dishwasher-safe blending shaft. Includes a battery charging/docking station with two batteries, quick-charging circuit and storage/transport case.



@waringcommercial

©2019 Waring Commercial
 314 Ella T. Grasso Avenue, Torrington, CT 06790
 Tel. 800-492-7464 • Fax 860-496-9008

waringcommercialproducts.com

BOLT® Cordless Lithium Immersion Blender

WSB38X2

ACCESSORIES




WSB38XBP Battery Pack



WSB38XCS 1.5-Hour Quick-Charging Station




WSB38XSC Storage/Carrying Case



WSB38XST 7" Stainless Steel Shaft

DIMENSIONS

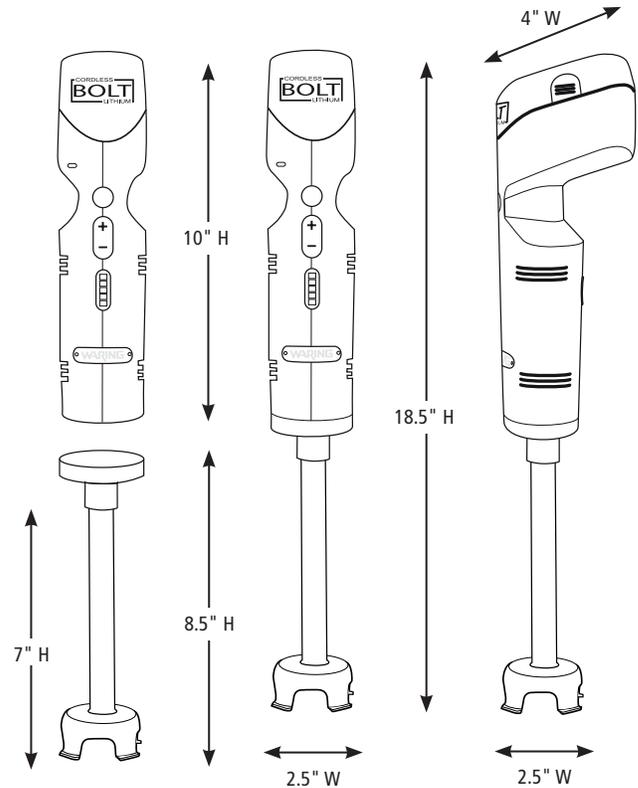

Out of Box Weight: 2 lb.

ORDERING INFORMATION	#STD. PKG.	GIFTBOX WEIGHT	CUBIC FEET	BOX DIMENSIONS D X W X H	UPC	CASE PKG.	MC WEIGHT	MC DIMENSIONS D X W X H	MBC
WSB38X2 – BOLT® Cordless Lithium Immersion Blender	1	4.85 lb.	.446	9.875" x 5" x 15.625"	040072082566	4	21.3 lb.	16.125" x 10.625" x 20.875"	10040072082563



@waringcommercial

©2019 Waring Commercial
314 Ella T. Grasso Avenue, Torrington, CT 06790
Tel. 800-492-7464 • Fax 860-496-9008

waringcommercialproducts.com

19WC059619 / REV 03/19