

Insulated Economy Warming & Holding Cabinets

Standard Features

- Stainless steel exterior & interior
- ATWC-12 holds twelve (12) 18 x 26 pans and
ATWC-24 holds twenty-four (24) 18 x 26 pans
- Heating mode with adjustable temperature settings
between 85°F – 207°F
- Easy to read LED display
- Transparent clear polycarbonate door with 90° stay
open feature for loading of product
- Fully insulated cabinet with environmentally friendly
foaming material prevents heat loss, provides energy
savings and environmental protection
- Integrated slides and removable control drawer for
easy cleaning
- Field reversible door
- 10' power cord
- Four (4) casters standard – two locking, two swivel

MODELS:

ATWC-12 / ATWC-24

ATWC-12



ATWC-24



1 YEAR PARTS AND LABOR WARRANTY



Conforms to ANSI
STD Z83.11b-2009 (2011)
Certified for CSA
STD 1.4B-2009 (2011)
Conforms to NSF/ANSI STD.4




REV. 04/25

SPECIFICATIONS


Models	Description	Voltage (V)	Frequency	Rated Current (A)	Power (W)	Temperature Control Range (°F)	Capacity (layers)	Exterior Dimensions (inch)	Gross Weight (lb)
ATWC-12	Heated cabinet (12 pans)	120	60	13.2	1580	85-207	12	21 1/2 × 31 3/4 × 42 3/4	135
ATWC-24	Heated cabinet (24 pans)	120	60	13.2	1580	85-207	24	21 1/2 × 31 3/4 × 69 3/4	220

PLAN VIEW

ATWC-12

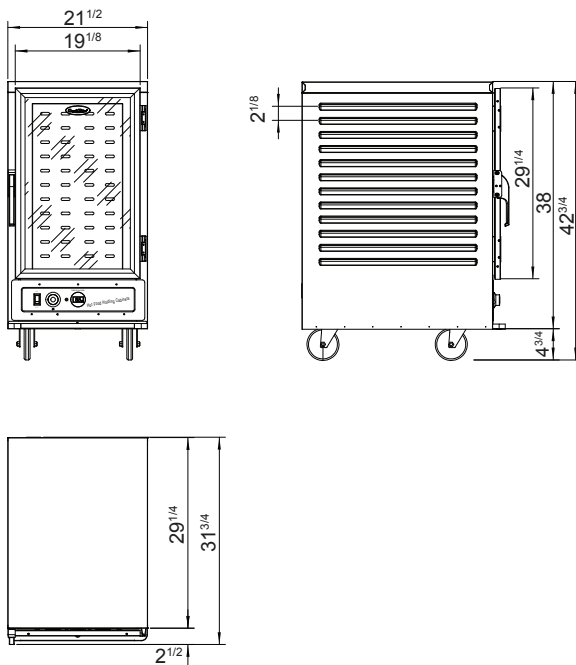

ATWC-24

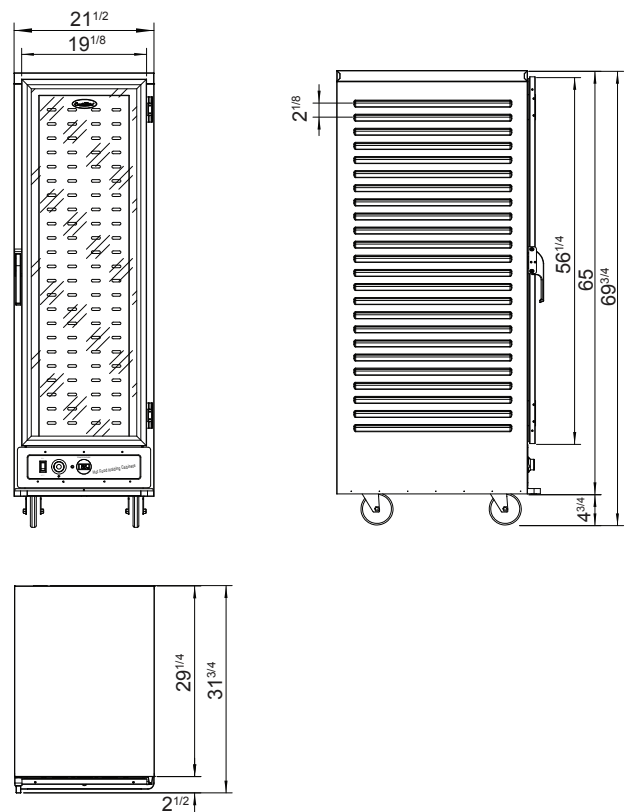


Polycarbonate door



Controller



Pan racks



NEMA 5-15P

