



VACUUM PACKING MACHINE SU-420GP+ 120/50-60/1

Tabletop model. 848 cf/h. 17".

P/N. 1140788



FOOD PRESERVATION AND SOUS-VIDE
COMMERCIAL VACUUM PACKING MACHINES



SALES DESCRIPTION

17" sealing bar.
848 cf/h Busch vacuum pump.
Vacuum controlled by sensor.

- ✓ Powered by Busch.
- ✓ Vacuum controlled by sensor.
- ✓ Vacuum PLUS.
- ✓ LCD colour screen: all information at a glance.
- ✓ Backlit touch keyboard.
- ✓ Programmable: 99-programme memory. Blocking option.
- ✓ "Pause" button to marinate food.
- ✓ Phased vacuum programme.
- ✓ Detection of the evaporation of liquids.
- ✓ Double seal.
- ✓ Cordless sealing bar.
- ✓ Bag sealing program.
- ✓ Progressive decompression.
- ✓ Vac-Norm ready with automatic decompression.
- ✓ Stainless steel body and chamber. Deep-drawn chamber.
- ✓ Damped transparent lid.
- ✓ Dry-oil programme for drying the pump.
- ✓ Working hours counter for oil changes.
- ✓ Safety system with protection against vacuum failure.

INCLUDES

- ✓ Bluetooth connectivity and connection for printer (P models).
- ✓ PLUS welding for retort pouches (+ models).
- ✓ Inert gas flush (G models).
- ✓ BUSCH pump.
- ✓ Sensor Controls.
- ✓ 25 programmable settings.
- ✓ Vacuum PLUS: up to 10 seconds of extra vacuum pull.
- ✓ Soft air function.
- ✓ Clear methacrylate lid.
- ✓ "PAUSE" function.
- ✓ Liquid detection system.
- ✓ Dry oil cycle.
- ✓ NSF Approved.
- ✓ Filling plate.

OPTIONAL

- ☐ Printer
- ☐ Vacuum packing bags
- ☐ External vacuum kit for Vac-Norm, containers and accessories
- ☐ Bag cutting kit
- ☐ Support for liquid packaging
- ☐ Additional filling plates

ACCESSORIES

- ☐ Bag cutting kits
- ☐ Filling plates
- ☐ Liquid insert plates
- ☐ Vac-norm external vacuum kit
- ☐ Vac-norm containers
- ☐ Smooth bags for vacuum packing
- ☐ Trolley for vacuum packing machines
- ☐ Thermal labels for CG2 / RB printer
- ☐ RB desktop printer for SU vacuum packing machines
- ☐ Thermal transfer labels for RB printer
- ☐ Vacuum packing machines maintenance kits

SPECIFICATIONS

Pump capacity: 848 cf/h
Bar length: 17"
Total loading: 1 Hp
Vacuum pressure (maximum): 2 mbar
Electrical supply: 120 V / 60 Hz / 1~ (13 A)
Plug: USA (NEMA 5-15P / 2P+G)

Internal dimensions



SAMMIC, S.L. · Basarte, 1
20720 AZKOITIA (Gipuzkoa) · SPAIN



product sheet
updated 10/03/2026



VACUUM PACKING MACHINE SU-420GP+ 120/50-60/1

Tabletop model. 848 cf/h. 17".




P/N. 1140788

- ✓ Width: 17"
- ✓ Depth: 16.3"
- ✓ Height: 7"

External dimensions (W x D x H)

- ✓ Width: 19"
- ✓ Depth: 20.8"
- ✓ Height: 20.8"

Net weight: 126.6 lb
Noise level (1m.): 75 dB(A)
Background noise: 32 dB(A)
Crated dimensions
23.6 x 23.6 x 24.0 "
Gross weight: 144.2 lbs.

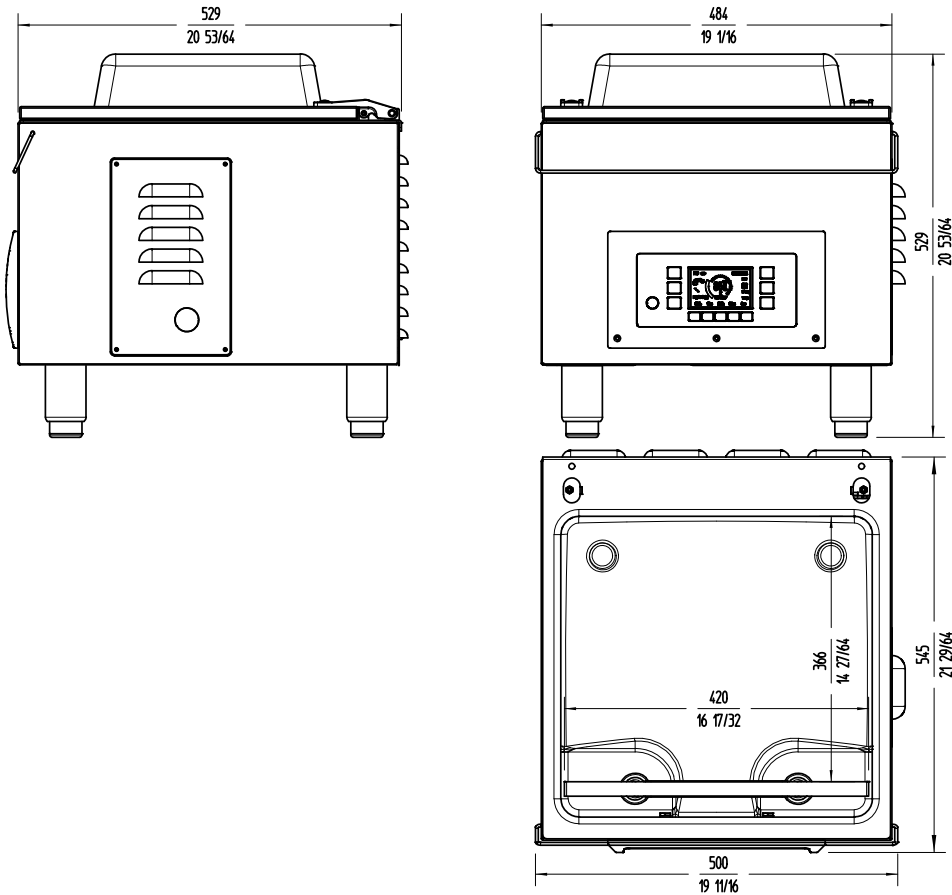

FOOD PRESERVATION AND SOUS-VIDE
COMMERCIAL VACUUM PACKING MACHINES

sammic | sammic.us
Food Service Equipment Manufacturer

usa@sammic.com phone +1 (224) 307-2232
1225 Hartrey Avenue toll free +1 844 275 3848
60202-1056 Evanston, IL



Project	Date
Item	Qty
Approved	

product sheet
updated 10/03/2026