VACUUM SEALER SU-810CC

Floorstanding unit. 100 m³/h . 581 + 581 mm.

Sales Description

Two sealing bars 581 + 581 mm.
100 m³/h Busch vacuum pump.
Vacuum controlled by sensor.

- ✓ Powered by Busch.
- ✓ Vacuum controlled by sensor.
- ✓ Vacuum PLUS.
- ✓ LCD colour screen: all information at a glance.
- ✓ Backlit touch keyboard.
- ✓ Programmable: 99-programme memory. Blocking option.
- ✓ “Pause” button to marinate food.
- ✓ Phased vacuum programme.
- ✓ Detection of the evaporation of liquids.
- ✓ Double seal.
- ✓ Cordless sealing bar.
- ✓ Bag sealing program.
- ✓ Progressive decompression.
- ✓ Vac-Norm ready with automatic decompression.
- ✓ Stainless steel body and chamber.
- ✓ Damped transparent lid.
- ✓ Dry-oil programme for drying the pump.
- ✓ Working hours counter for oil changes.
- ✓ Safety system with protection against vacuum failure.
- ✓ NSF-listed model.

Includes

- ✓ BUSCH pump.
- ✓ Sensor controls.
- ✓ Programmable.
- ✓ Bluetooth connectivity.
- ✓ Vacuum PLUS: up to 10 seconds of extra vacuum pull.
- ✓ Soft air function.
- ✓ Clear methacrylate lid.
- ✓ “PAUSE” function.
- ✓ Liquid detection system.
- ✓ Dry oil cycle.
- ✓ NSF approved.
- ✓ Filling plate.

Optional

- ❑ Inert gas.
- ❑ Sealing plus.
- ❑ Printer.
- ❑ Vacuum packing bags.
- ❑ External vacuum kit for Vac-Norm, containers and accessories.
- ❑ Bag cutting kit.
- ❑ Support for liquid packaging.
- ❑ Additional filling plates.

Accessories

- ❑ Bag cutting kits
- ❑ Filling plates
- ❑ Liquid insert plates
- ❑ Vac-norm external vacuum kit
- ❑ Vac-norm containers
- ❑ Smooth bags for vacuum packing
- ❑ Thermal labels for CG2 / RB printer
- ❑ RB desktop printer for SU vacuum packing machines
- ❑ Thermal transfer labels for RB printer

Specifications

Pump capacity: 100 m³/h
Pump capacity (60 Hz): 120 m³/h
Bar length: 581 mm
Total loading: 2200 W
Vacuum pressure (maximum): 0.5 mbar

Internal dimensions

- ✓ Width: 864 mm
- ✓ Depth: 603 mm
- ✓ Height: 215 mm

External dimensions (W x D x H)

- ✓ Width: 960 mm
- ✓ Depth: 757 mm
- ✓ Height: 998 mm (230V) / (120V)

Noise level (1m.): 75 dB(A)
Background noise: 32 dB(A)

Crated dimensions
840 x 1060 x 1200 mm

Available Models

1140948	SU-810P CC 400/50-60/3N
1140950	SU-810P+ CC 400/50-60/3N
1140951	SU-810GP CC 400/50-60/3N
1140953	SU-810GP+ CC 400/50-60/3N
1140978	SU-810P CC 208-240/60/3
1140980	SU-810P+ CC 208-240/60/3
1140981	SU-810GP CC 208-240/60/3
1140983	SU-810GP+ CC 208-240/60/3

** Ask for special versions availability*

FOOD PRESERVATION AND SOUS-VIDE
COMMERCIAL VACUUM PACKING MACHINES

product sheet
updated 28/10/2024

SAMMIC, S.L.
Basarte, 1 · 20720 AZKOITIA
www.sammic.com

Copyright 2024 © Sammic S.L.

VACUUM SEALER SU-810CC

Floorstanding unit. 100 m³/h . 581 + 581 mm.

FOOD PRESERVATION AND SOUS-VIDE
COMMERCIAL VACUUM PACKING MACHINES

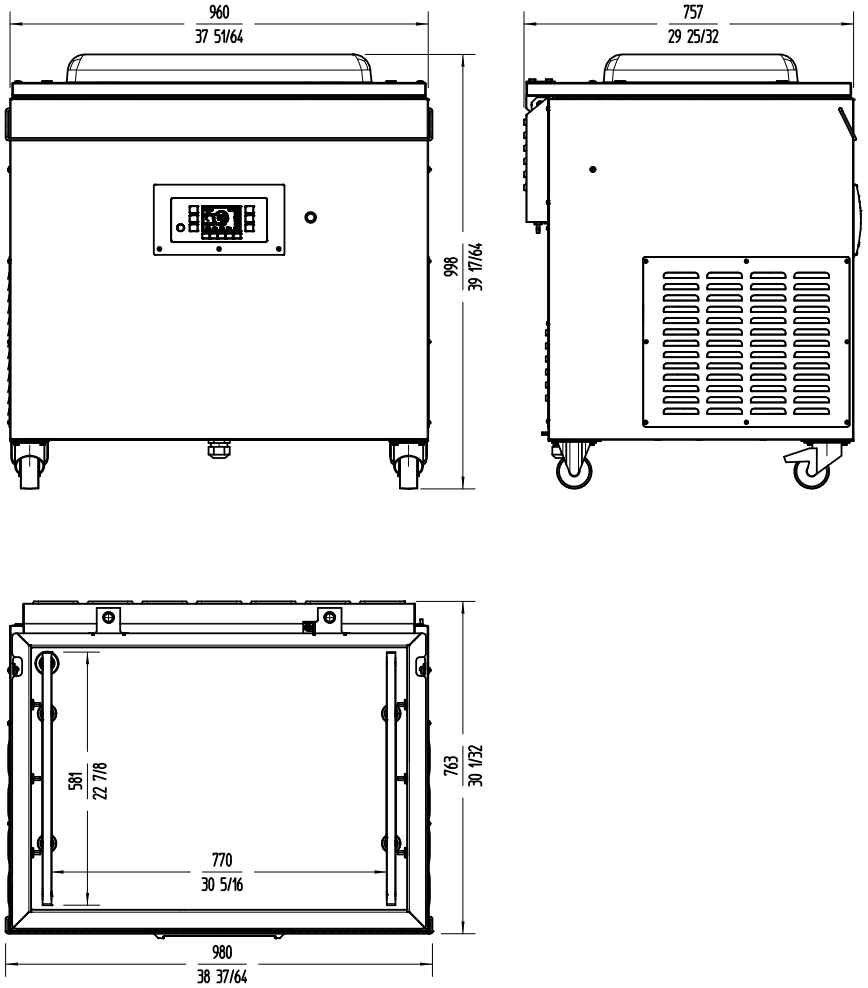

sammic | www.sammic.com
Food Service Equiment Manufacturer

Polígono Basarte, 1.
20720 Azkoitia, Spain

phone +34 943 15 72 36
sales@sammic.com

Project	Date
Item	Qty
Approved	

product sheet updated **28/10/2024**

Copyright 2024 © Sammic S.L.