

VISIDIPPER ICE CREAM DIPPING CABINETS/ GELATO CASES

The VisiDipper design remains one of the most innovative design for ice cream dipping cabinets in the industry. The 4-1/2" lower front heated glass provides 35% viewing and display area than standard dipping cabinets designs.

The VisiDipper product line features the KDCVISIPPER which offers straight front glass and the CKDCVISIPPER offers curved front glass. Both models are available in (4) hole, (8) hole, (12) hole, and (16) hole designs.



All products are certified for energy , safety and sanitation. NSF/ ANSI 7 Standards

FEATURES

- 20 Gauge steel interior and exterior foamed in place with white powder coat finish
- Stainless steel straight (KDC) or curved (CKDC) stainless steel canopy & stainless steel top
- Triple pane heated glass offers 35% more viewing/display area
- Perimeter heaters on located on top & sides of stainless steel canopy
- Patented Kelvinator refrigeration design guarantees consistent interior temperature
- Tempered glass lids with piston design
- LED Lighting
- Digital temperature controller with LED display
- Manual defrost
- Temperature Range +10°F to -15°F


ACCESSORIES

- Can Skirt Kits
- Dipperwell Kit
- Gelato Pan Rack Kit
- Frost Shield Kit
- Casters Kit
- Stainless Steel Exterior Option

VISIDIPPER ICE CREAM DIPPING CABINETS

TECHNICAL DATA

| MODEL | KDC27V | KDC/CKDC47V | KDC/CKDC67V | KDC/CKDC87V |
|-------------------------------|----------------|----------------|----------------|----------------|
| Temp Range | +10°F to -15°F | +10°F to -15°F | +10°F to -15°F | +10°F to -15°F |
| Exterior Dimensions | | | | |
| Length | 25.75 | 46.5" | 67" | 88" |
| Depth | 26.75 | 26.75" | 26.75" | 26.75" |
| Height | 51.81 | 51.81" | 51.81" | 51.81" |
| Capacity | 4.6 cu. ft. | 12.0 cu. ft. | 19.1 cu. ft. | 26.4 cu. ft. |
| Capacity (3-gal. tubs) | 4 | 12 | 20 | 28 |
| Facings (3-gal. tubs) | 4 | 8 | 12 | 16 |
| Storage (3-gal. tubs) | 0 | 4 | 8 | 12 |
| Compressor | Hermetic | Hermetic | Hermetic | Hermetic |
| Shipping Weight | 235 lbs. | 365 lbs. | 525 lbs. | 635 lbs. |
| Condensor Type | Bare Tube | Bare Tube | Bare Tube | Bare Tube |
| Lighting | LED | LED | LED | LED |
| Electrical | 115/60/1 | 115/60/1 | 115/60/1 | 115/60/1 |
| Rated Amps | 5.0 | 11.5 | 12.5 | 12.5 |

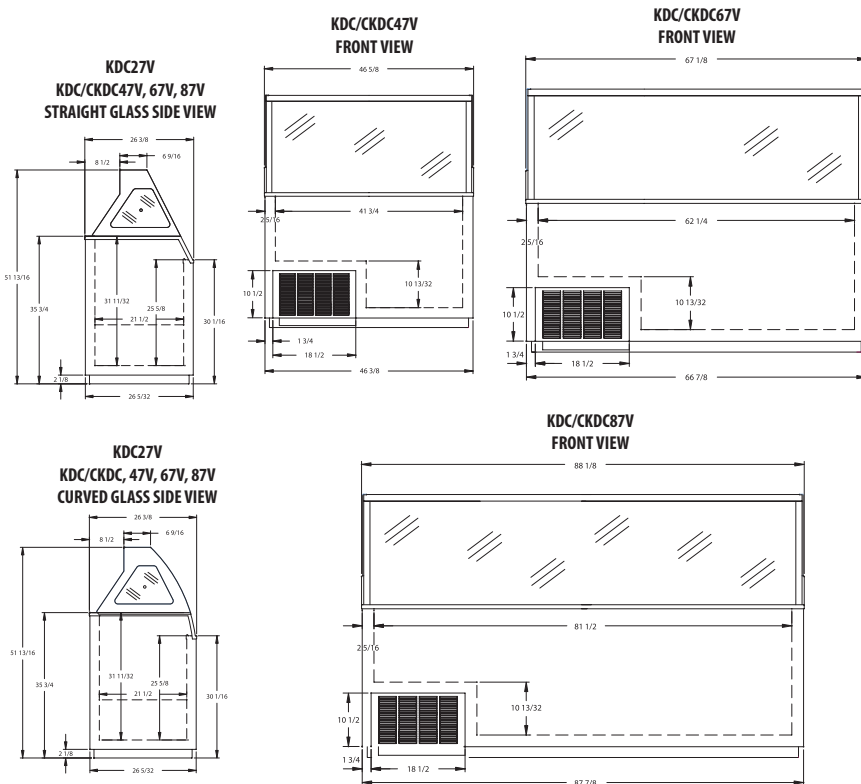


SPECIFICATIONS

KDC27V, KDC/CKDC47V, 67V, 87V

Furnish () quantity. VisiDipper Ice Cream Dipping Cabinets, Kelvinator model _____ KDC _____ V. The unit construction shall consist of a 20-ga. white powder-coat finished galvanized steel interior and exterior, foamed in place. The unit will be supplied with an air piston-assisted, tempered, scratch-proof service-side lid and a stainless-steel top service area.

Cabinet as specified to use R-404a refrigerant. Refrigeration control shall be thermostatic control with a temperature range of 10°F to -15°F. Cabinet to have independent on/off switch for compressor and light switch to be mounted in the shell of the cabinet and to be furnished with a drain connection. Cabinet to be provided as a rear-air intake and front-air discharge (consult factory for rear-air intake and discharge). 10ft. power cord.



Cabinet designed for optimum performance in air-conditioned area at 70°F to 75°F ambient temperature and 50% to 55% relative humidity.

Global Refrigeration, Inc.

Global Refrigeration, Inc., reserves the right to change specifications, terms, and prices without notice.

5855 Grant Avenue, Cleveland, OH 44105

888.650.9799

www.globalref.com