

Synergy Refrigerated Island Well

Product Group: **Synergy Drop-ins**
 Range: **Refrigerated**
 Sub Range:
 Product Name: **Island well**
 Part Number: **DRIW**
 Victor Computer Code: **DRIWY**
 Price List Page: **Synergy 5**



Electrical Connection
 220V/240V, 1 phase, 50 Hz.

Cable
 Units fitted with 2 metres of cable and 13 amp plug.

Refrigerant
 R404a CFC free refrigerant

Construction
 Top: Stainless Steel, Exterior: Stainless Steel,
 Interior: Stainless Steel


Designed for self service from both sides.

- Gantry Features**
- Constructed from 50mm diameter, bright polished stainless steel tube.
 - Fluorescent illumination to stainless steel light box.
 - Toughened glass screen with curve to both sides and over shelf.
 - Digital temperature control and readout.

- Well Features**
- 304 Stainless steel well - 170mm deep
 - Load line indicator at 100mm to assist in the safe presentation of food
 - Accepts GNI/1 gastronorm containers up to 100mm deep.
 - Completely removable well giving easy access for cleaning and maintenance

Operating conditions

Designed to comply with the operating requirements of EN ISO 23953 - 2:2005
 Performance level M1 (-1°C to + 5°C) in Climate class 3 (25°C, 60%RH,0.2m/s) and
 Performance level M2 (-1°C to + 7°C) in Climate class 4 (30°C, 55%RH,0.2m/s)

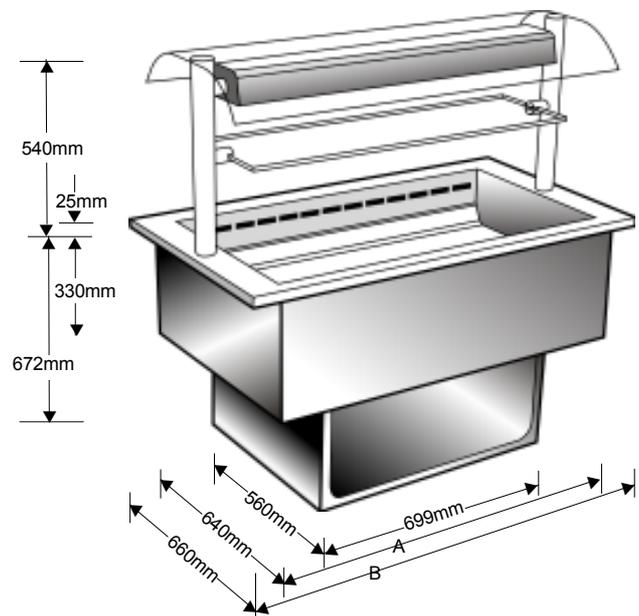

Product	GNI/1 Capacity	Part Number	cut out size (mm)	top size(mm)		power (W)	Approx. weight (kg)
				length	width x height		
Blown Air Island Well	3	DRIW 3	1045 x 646	A	B	1600	105
	4	DRIW 4	1370 x 646	1036	1177 x 660 x 540	2100	130