

PROJECT:		
ITEM #		. QTY:
MODEL #		
AIA #	SIS #	

# PIZZA PREP TABLE WITH DRAWERS

VPPD72HC-2



### **EXCLUSIVE WARRANTY**

- 7 Year Parts, Labor and Compressor
- Exclusive 2 Year Warranty On Magnetic Door Gaskets
- Lifetime Warranty On Handles & Hinges (parts only)





### **CABINET CONSTRUCTION**

- Stainless Steel Exterior (galvanized back and bottom)
- **Aluminum Interior**
- · Hinged, Insulated, Removable Flat Lift-Up Lid
- · One-Piece, Snap-In Magnetic Door/Drawer Gaskets
- · Heavy-Duty Aluminum Pan Liner
- · 8' Cord And Plug (see electrical data for details)

#### REFRIGERATION

- Refrigeration System Uses R-290 Refrigerant To Comply With All Environmental Concerns
- · Side Mounted Refrigeration System For Serviceability
- Adaptive Defrost For Reduced Energy Consumption And More Consistent Product Temperatures
- · Epoxy Coated Evaporator Coil
- Refrigerator Capable Of Maintaining Product Temperature 36°F To 38°F

#### **FEATURES**

- **Full Electronic Control**
- Chrome Lift Off Hinges
- Low Profile Horizontal Door/Drawer Handles
- Epoxy Coated Shelves (2 per section)
- Stay-Open Door/Drawer Feature For Easy Product
- Heavy-Duty Stainless Steel Drawer Frames
- Heavy-Duty Pan Divider Supports Supplied
- Locking Divider Bars (drawers only)
- Ţop Accommodates 6" Deep Food Service Pans (pans not included)
- Accommodates 6" Deep Full Size Food Service Pans In Both Upper And Lower Drawers (pans not included)
- Heavy-Duty, Telescoping Drawer Slides With Locking Mechanism
- 275 lbs Drawer Load Rating (per drawer)
- Removable 19" Wide Cutting Board
- 3" Casters Two With Locks



• Remote Models\* (6" legs only)

Please Veri By Visiting:

#### **OPTIONS & ACCESSORIES**

- · Stainless Steel Interior
- · Shelf Clips
- · Stainless Steel Back
- · Single & Double Overshelf Kit · Bun Tray Rack (per door)
- · Exterior Door Laminate Door/Drawer Locks
- · Tray Slide Kit
- · Additional Shelves
- · 6" Casters, 6" Legs Or 6" Seismic Legs

3779 Champion Blvd, Winston-Salem, NC 27105

ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com VictoryRefrigeration.com

APPROVAL: \_ \_ DATE: \_ Rev. 7/1/24 Printed in U.S.A.

Citation of the
fy Qualifying Units E
w.eneravstar.gov/c


· Compressor On Left (specify at time of order)

(refrigerant must be specified at time of order, see note on back on page)



## VPPD72HC-2



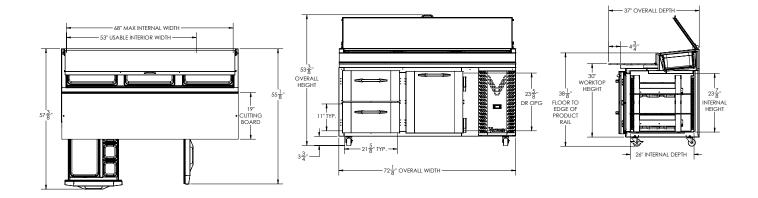

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

#### 2" Bottom & 2" Rear clearance is required

CHARACTERISTICS		ELECTRICAL DATA		SHIPPING DETAILS		
Net Capacity (cubic ft.)	22.77	Cabinet Voltage	115/60/1	Height	48"	
Width, Overall (in.)	72 1/8"	Total Amperes	4.5	Width	75"	
Depth, Overall (with cutting board)	37"	NEMA Plug (8' cord)	5-15P	Depth	45"	
Height Overall (with casters)	53 3/8"	REFRIGERATION DATA		Crated Weight	542 lbs	
Depth, Drawer Extended	57 3/8"	Condensing Unit Size, HP	1/2	*NOTE: Remote units are field		
Depth, Door Open 90°	55 1/8"	Refrigerant*	R-290			
Drawer Openings (in.)	21 5/8" x 11"	Capacity (BTU/HR) (100°F/20°F)	2940	wired and come with 6" legs. Refrigerant must be specified at		
Door Opening (in.)	21 5/8" x 23 5/8"	Heat Rejection (BTU/HR)	4410	time of order.		
No. Of Doors/Shelves/Drawers	1/2/2	Charge (lbs/grams/ounces)	0.231 / 105 / 3.70			

3779 Champion Blvd, Winston-Salem, NC 27105 | ph: (888) 845-9800 | fax: (800) 253-5168

Rev. 7/1/24 Printed in U.S.A.

