Pan Gelato Dipping Cabinets with Pans

(WITHOUT SNEEZE GUARD)

ITEM:	47742	47743	47744
MODEL:	FR-CN-0005	FR-CN-0009	FR-CN-0014

Serve gelato and ice cream in style with a pan gelato dipping cabinet.

These dipping cabinets display gelato in 5 L pans: 4 pans in the 26" model, 9 in the 50" and 13 in the 71", with an extra 180 g pan on the 26" and 71" models for toppings. A digital temperature controller holds -15°F to 32°F (-26°C to 0°C), and the system runs on eco-friendly R290 refrigerant.

Two sliding doors with locks give staff easy, secure access, and casters make each cabinet easy to move. The exterior is durable white powder-coated steel with a white pre-coated steel interior.

- **4, 9 or 13 pans (5 L)**
- **26", 50" and 71" widths**
- **Digital temperature control**
- **Eco-friendly R290 refrigerant**
- **Sliding doors with locks**
- **Casters for mobility**

Sneeze guard not included. An optional flat glass sneeze guard is sold separately for each size: 47742 – AR268 • 47743 – AR269 • 47744 – AR270



47742 • 26" • 4 Pans



47743 • 50" • 9 Pans



47744 • 71" • 13 Pans

Images shown with optional sneeze guard (sold separately).

AT A GLANCE

Certification	cETLus • ETL Sanitation
Warranty	1 Year Parts • 1 Year Labor



Telephone: 1-800-465-0234 Fax: (905) 607-0234 Email: sales@omcan.com Website: www.omcan.com

AUTHORIZED DEALER

Shipped by Freight

cETLus Certified

ETL Sanitation Certified

1 Year Parts Warranty

1 Year Labor Warranty


NEMA 5-15P Plug Type

TECHNICAL SPECIFICATION


	47742 FR-CN-0005	47743 FR-CN-0009	47744 FR-CN-0014
Width	26"	50"	71"
Capacity	4.25 cu.ft. (120 L)	10.2 cu.ft. (290 L)	15.9 cu.ft. (450 L)
Maximum Load	265 lb (120 kg)	639.3 lb (290 kg)	992.1 lb (450 kg)
Number of Pans	4	9	13
Pan Capacity	4 x 5 L 1 x 180 g	9 x 5 L	13 x 5 L 1 x 180 g
Pan Size	5 L: 14.2" x 4.7" x 6.5" (360 x 120 x 165 mm) 180 g: 6.3" x 5.2" x 3.9" (161 x 132 x 100 mm)	5 L: 14.2" x 4.7" x 6.5" (360 x 120 x 165 mm)	5 L: 14.2" x 4.7" x 6.5" (360 x 120 x 165 mm) 180 g: 6.3" x 5.2" x 3.9" (161 x 132 x 100 mm)
Number of Doors	2	2	2
Interior Material	White Pre-Coated Steel Sheet	White Pre-Coated Steel Sheet	White Pre-Coated Steel Sheet
Exterior Material	White Powder-Coated Steel	White Powder-Coated Steel	White Powder-Coated Steel
Casters	Yes (4)	Yes (4)	Yes (6)
Power	210 W	260 W	295 W
Compressor Power	1/4+ HP	2/5+ HP	2/3+ HP
Amps	2 A	3 A	4 A
Electrical	110V / 60Hz / 1Ph	110V / 60Hz / 1Ph	110V / 60Hz / 1Ph
Temperature Controller	Digital	Digital	Digital
Temperature Range	-15°F to 32°F (-26°C to 0°C)	-15°F to 32°F (-26°C to 0°C)	-15°F to 32°F (-26°C to 0°C)
Refrigerant	R290	R290	R290
Injection	56.7 g	79.9 g	104.9 g
Type of Climate	N/ST	N/ST	N/ST
Insulation Material	C5H10	C5H10	C5H10
Defrosting	Manual	Manual	Manual
Cooling System	Compressor	Compressor	Compressor
Net Weight	154.3 lb (70 kg)	198.4 lb (90 kg)	257.9 lb (117 kg)
Net Dimensions (WDH)	26.2" x 28.1" x 34.5" (665 x 715 x 876 mm)	49.6" x 28.1" x 34.5" (1260 x 715 x 876 mm)	70.9" x 28.1" x 34.5" (1800 x 715 x 876 mm)
Sneeze Guard	Not included	Not included	Not included
Optional Sneeze Guard (Sold Separately)	Item AR268	Item AR269	Item AR270
Certification	cETLus • ETL Sanitation	cETLus • ETL Sanitation	cETLus • ETL Sanitation
Warranty	1 Year Parts • 1 Year Labor	1 Year Parts • 1 Year Labor	1 Year Parts • 1 Year Labor

TECHNICAL DRAWING

Item: 47742

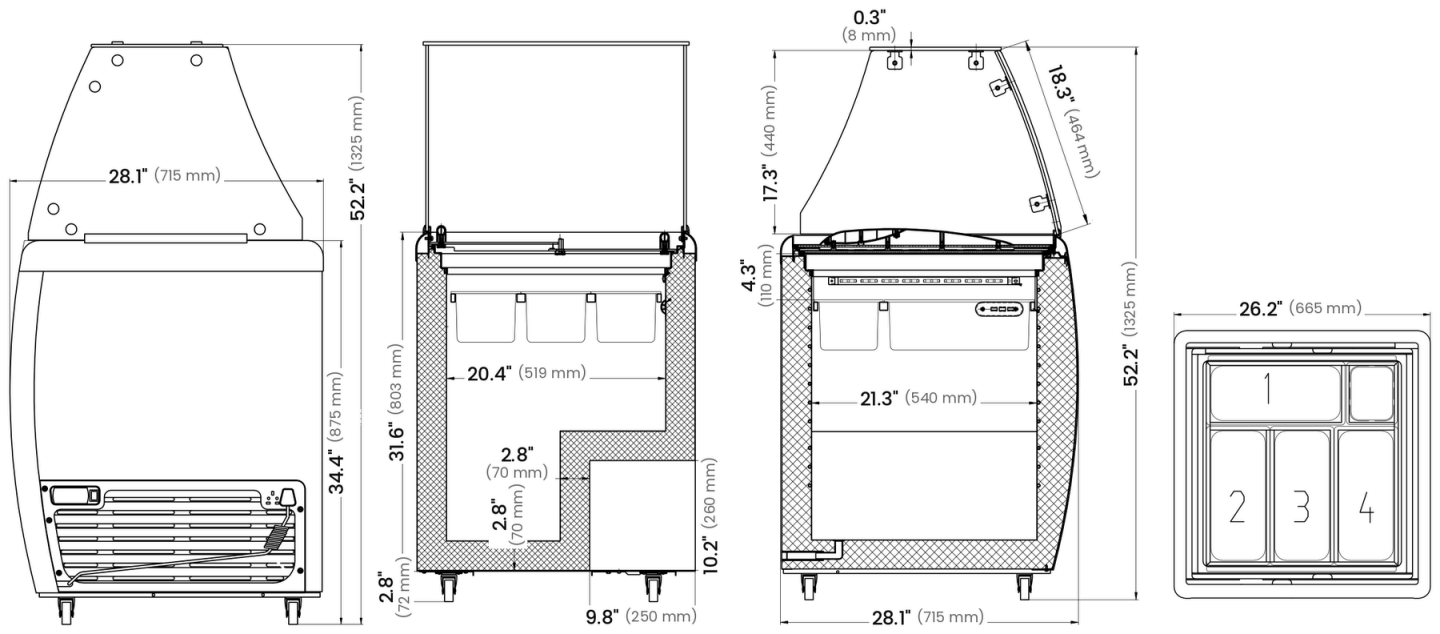


Item: 47743

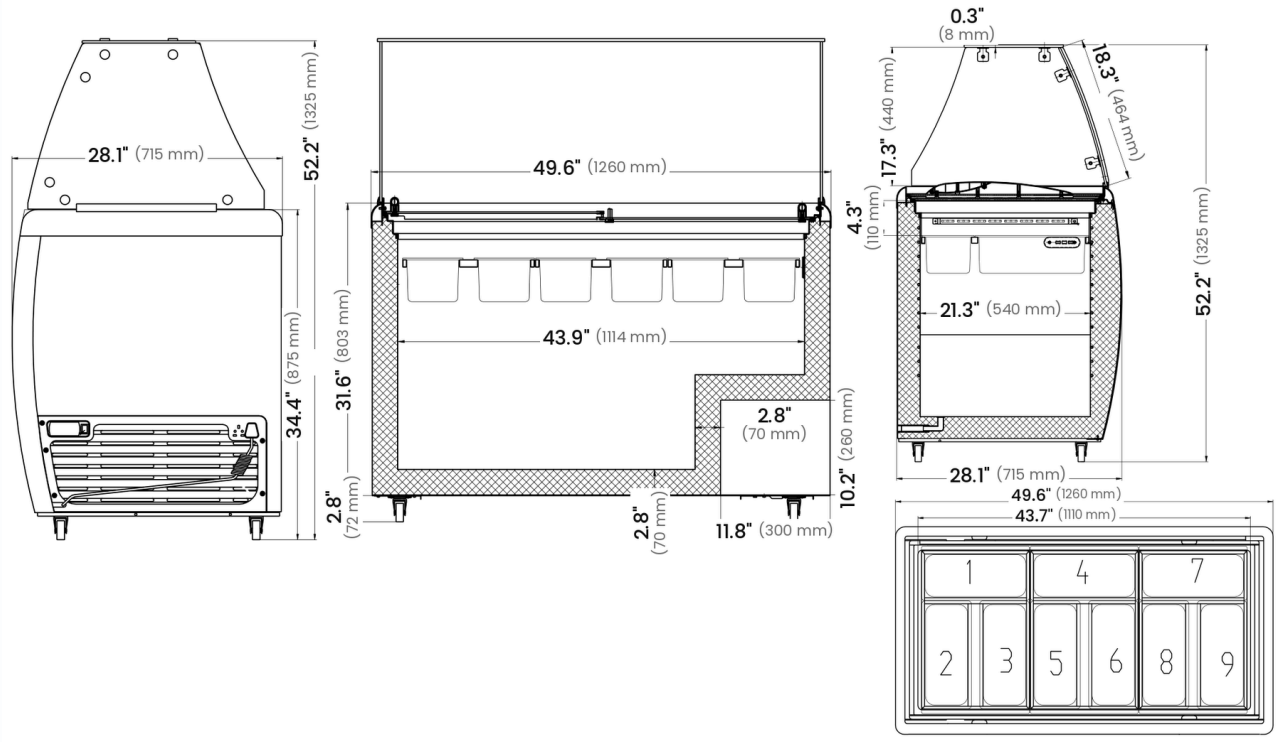

TECHNICAL DRAWING

Item: 47744

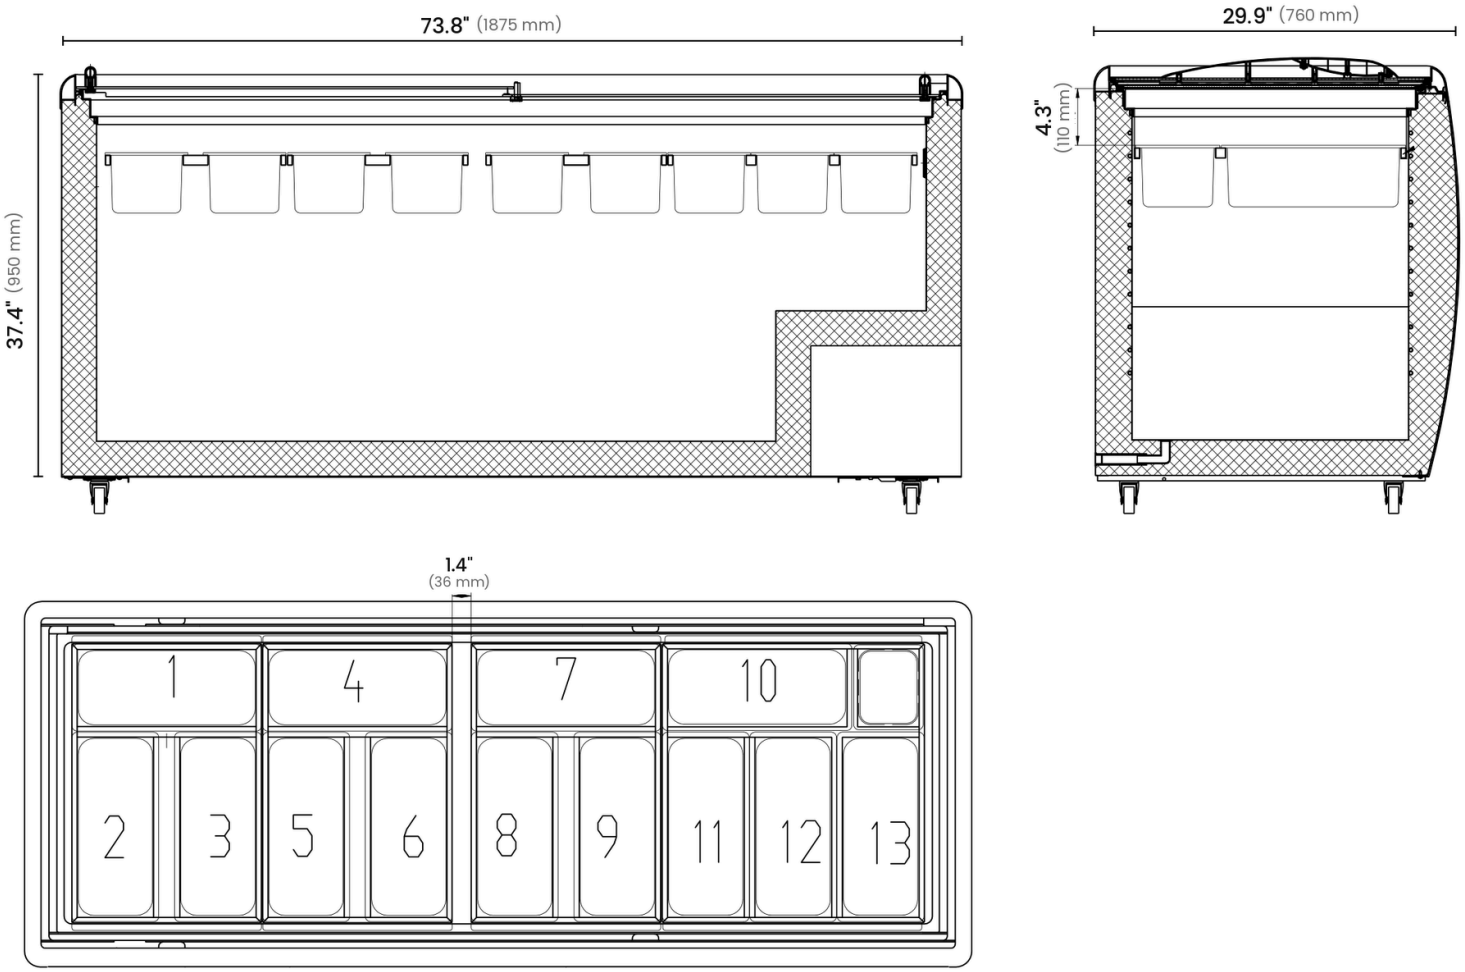

Specifications subject to change without notice.