Your Solutions Partner

Specifications

F.O.B. Sedalia, Missouri 65301



E-4-DLSS

OPTIONS:

- ❑ 14 gauge tops
- ❑ Recessed top (to accommodate griddles, fryers, etc.)
- ❑ Adaptor plates
- ❑ 3-phase wiring
- ❑ 1200 Watt
- ❑ 6', 8' or 10' Cord and plug
- ❑ Heated base module
- ❑ Sliding Doors
- ❑ Pass-thru construction
- ❑ Veneered plastic laminate panels on body
- ❑ Casters (add cord and plug), 5" swivel with locks
- ❑ Food shields
- ❑ Tray slides
- ❑ Work shelves
- ❑ 34" ADA height (units finish at 33.5"). Adjustable height casters with 5/8" adjustability allow leveling to 34"

AGENCY LISTINGS:

DUKE MANUFACTURING CO.
2305 N. Broadway
St. Louis, MO 63102
800.735.3853 Toll Free
314.231.5074 Fax
www.dukemfg.com

Specification subject to change

WARNING For CA residents: go to www.dukemfg.com/prop65 for prop 65 warning

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL:
Thurmaduke® Steamtables
Hot Food Units - Electric - Deluxe

- ❑ E-2-DLPG/E-2-DLSS 2 top openings
- ❑ E-3-DLPG/E-3-DLSS 3 top openings
- ❑ E-4-DLPG/E-4-DLSS 4 top openings
- ❑ E-5-DLPG/E-5-DLSS 5 top openings
- ❑ E-6-DLPG/E-6-DLSS 6 top openings

TOP:

- ■ 16 gauge, 300 Series stainless steel
- ■ Die-stamped openings 11 7/8" x 19 7/8"
- ■ Integral carving/work surface

HEAT COMPARTMENTS:

- ■ 6 ½" deep Sealed wells with drains
- ■ Wet heat operation
- ■ Fully Insulated Wells
- ❑ Copper manifolds and brass master valve
- ❑ 750 watt - Standard
- ❑ 120, 208 or 240 volt A/C
- ❑ Master Toggle Switch w/ indicator light for entire unit
- ■ Single Phase standard

BODY AND INTERIOR SHELF:

- ❑ Stainless Steel body
- ❑ Painted body w/ choice of powder coat colors
- ■ Full bottom shelf to match body
- ■ 6" polished stainless steel adjustable legs

INTEGRAL DISHSHELF:


- ■ Heavy gauge, one-piece stainless steel - 8" wide
- ■ Housing for control knobs, and master switch
- ■ Wire knob guards

A.I.A. File No. 35-C-13


Catalog No. TST-DTELECHOT

THURMADUKE® STEAMTABLES - HOT FOOD - ELECTRIC - DELUXE


Thurmaduke®

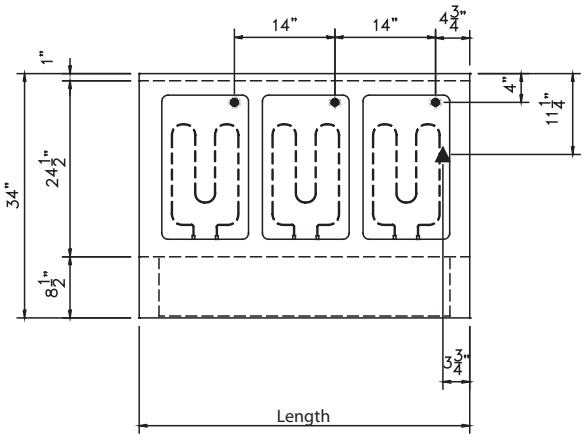

TOP VIEW

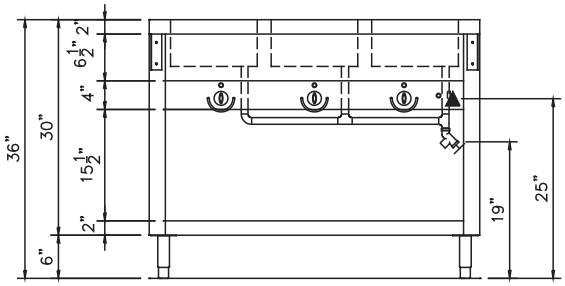

FRONT VIEW

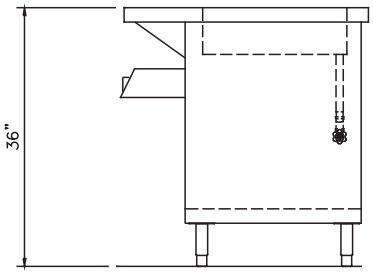

RIGHT SIDE VIEW

LEGEND	
▲	ELECTRICAL CONNECTION
●	DRAIN LOCATION

DIMENSIONS:

FREIGHT CLASS: 150

Model		Length		Width		Height		Top Openings	Cube ft. Crated	Weight	
Enameled	Stainless	in	cm	in	cm	in	cm			lbs	kg
E-2-DLPG	E-2-DLSS	32	81.3	34	86.4	36	91.4	2	27.0	255	115.9
E-3-DLPG	E-3-DLSS	46	116.8	34	86.4	36	91.4	3	38.1	335	152.3
E-4-DLPG	E-4-DLSS	60	152.4	34	86.4	36	91.4	4	49.2	410	186.4
E-5-DLPG	E-5-DLSS	74	188.0	34	86.4	36	91.4	5	60.2	495	225.0
E-6-DLPG	E-6-DLSS	88	223.5	34	86.4	36	91.4	6	71.3	595	270.5

Electrical Specifications:

(Consult factory for 3-phase electrical requirements and other options)

Cord & NEMA plug NOT included

Model	120V 750W			208V 750W			240V 750W		
	Watt	Amps	NEMA	Watt	Amps	NEMA	Watt	Amps	NEMA
E-2-DLPG	1500	12.5	5-15	1500	7.2	6-20	1500	6.3	6-20
E-3-DLPG	2250	18.8	L5-30	2250	10.8	6-20	2250	9.4	6-20
E-4-DLPG	3000	25.0	5-50	3000	14.4	6-20	3000	12.5	6-20
E-5-DLPG	3750	31.3	5-50	3750	18.0	L6-30	3750	15.6	L6-30
E-6-DLPG	N/A			4500	21.6	L6-30	4500	18.8	L6-30

Model	120V 1200W			208V 1200W			240V 1200W		
	Watt	Amps	NEMA	Watt	Amps	NEMA	Watt	Amps	NEMA
E-2-DLPG	2400	20	L5-30	2400	11.5	6-20	2400	10	6-20
E-3-DLPG	3600	30	5-50	3600	17.3	L6-30	3600	15	6-20
E-4-DLPG	N/A			4800	23.1	L6-30	4800	20	L6-30
E-5-DLPG	N/A			6000	28.9	6-50	6000	25	6-50
E-6-DLPG	N/A			7200	34.6	6-50	7200	30	6-50

Duke Manufacturing Co.
2305 N. Broadway
St. Louis, MO 63102

Phone: 314-231-1130
Toll Free: 1-800-735-3853
Fax: 314-231-5074

www.dukemfg.com

Your Solutions Partner

Printed in U.S.A
© 2025, Duke Manufacturing Co.