



GAS

SPEC SERIES | RANGE MATCH WOK

IMPERIAL



IHR-24-JW

Shown with optional stainless steel backguard

Model Numbers

IHR-24-JW - Mandarin style

IHR-24-2R - Tempura style

MANDARIN WOK RANGE

- Non-Clogging 18 tip jet burner provides an intense “cones-shaped” heat
- Burner is rated 120,000 BTU/hr (35 KW)
- Conveniently located knee level gas lever valve can be operated “hands free”
- Wok Ring is 13” (330 mm) diameter with a slated opening for 14” (356 mm) wok pans
- All welded 1/2” (13mm) round slanted steel ring top
- Wok is constructed for a long service life with all welded 12-gauge steel

TEMPURA WOK RANGE

- Two-ring burner with two adjustable gas valves
- Burner is rated 55,00 BTU/hr (16KW) for high product cooking
- Heating selections from simmer to high heat are available
- Control knobs are durable cast aluminum with a heat protection cooking
- Wok ring is 13” (330mm) diameter with slanted opening for 14” (356 mm) wok pans
- All welded 1/2” (13mm) round slanted steel ring top
- Wok ring is constructed for a long service life with all welded 12-gauge steel

EXTERIOR FEATURES

- Sleek European styling with wide radius ledge and optional high shelf
- Stainless steel front, sides, stub back, landing ledge and kick plate
- Welded and polished stainless-steel seams
- Enclosed front 1-1/4” (32 mm) manifold
- Common ledge and backguards are available as options for seamless, professional look 6” high (152 mm) 2 1/2” (64 mm) diameter heavy duty legs with adjustable feet.
- One year parts and labor warranty



TWO RING, HIGH PRODUCTION, BURNER WITH ADJUSTABLE GAS VALVES.



18 TIP JET BURNER PROVIDES INTENSE, CONE-SHAPED HEAT




WOK TOP ACCOMMODATES 14” (356 MM) WOK PANS.




GAS

SPEC SERIES | RANGE MATCH WOK

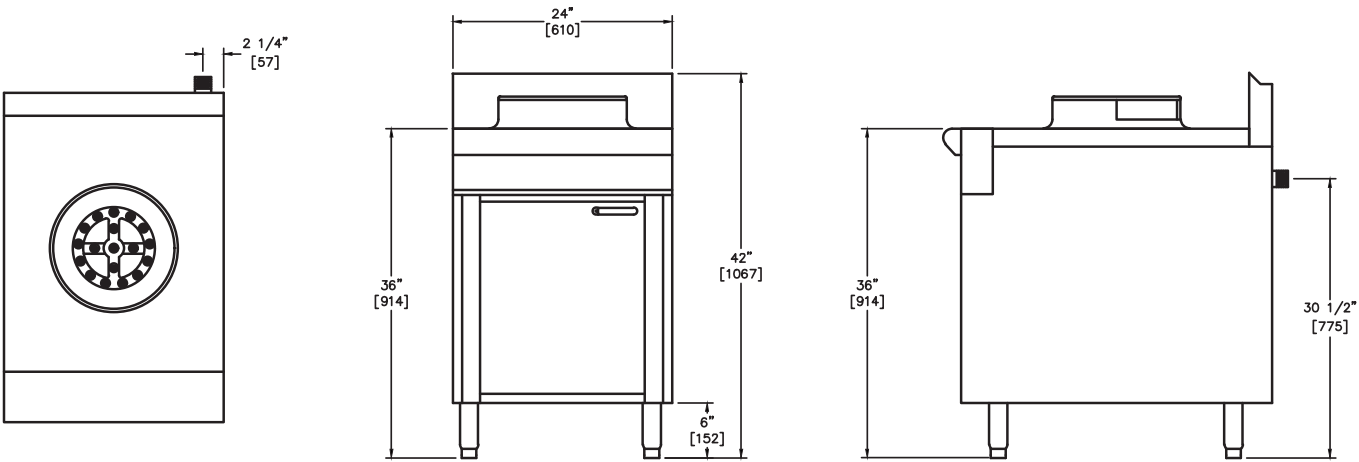

MANDARIN STYLE WOK RANGE




MODEL	GAS OUTPUT		BURNERS		SHIP WEIGHT	
	BTU	KW	STYLES	VALVES	KG	LBS
IHR-24-JW	120,000	35	18 TIP JET	KNEE LEVER AT KNEE HEIGHT	116	255

OPTIONS AND ACCESSORIES

- Stainless steel common front landing ledge 54", 72", 90", 108" (1372, 1829, 2286, 2743 mm)
- Stainless steel interior on open cabinet base
- Stainless steel double doors on open cabinet base
- Gas shut off valve, 3/4" or 1-1/4", N.P.T.
- Quick disconnect and flexible gas hose, 3/4" or 1-1/4", N.P.T.
- 3/4" rear gas connection for single unit connection
- 1-1/4" rear gas connection batteries up to 600,000 BTU (176 KW)
- Gas pressure regulator, 3/4" or 1-1/4", N.P.T. connection
- Quick disconnect and flexible gas hose, 3/4" or 1-1/4"
- 6" (152 mm) casters

TEMPURA STYLE WOK RANGE



MODEL	GAS OUTPUT		BURNERS		SHIP WEIGHT	
	BTU	KW	STYLES	VALVES	KG	LBS
IHR-24-2R	55,000	38	2 RING	2 ADJUSTABLE VALVES FROM SIMMER TO HIGH HEAT	116	255

MANIFOLD PRESSURE		
NATURAL GAS	PROPANE GAS	MANIFOLD SIZE
5.0" W.C.	10.0" W.C.	1-1/4"

CLEARANCE REQUIREMENTS

For use only on non-combustible floors. Legs or casters are required for non-combustible floors; or 2" (51 mm) overhang is required when curb mounted. Provide 0" clearance from non-combustible surfaces and 8" (203 mm) from combustible surfaces.



Dimensions:

24" w x 38" d x 36" h* (610 x 965 x 914 mm)

* to cooktop

Measurements in () are metric equivalents.

Crated Dimensions:

26-1/2" w x 41" d x 35" h (660 x 1041 x 889 mm)

Measurements in () are metric equivalents.