

Synergy Refrigerated Deep Deli

Product Group: **Synergy Drop-ins Refrigerated**
 Range:
 Sub Range:
 Product Name: **Deep Display Deli**
 Part Number: **DRDH**
 Victor Computer Code: **DRDDY**
 Price List Page: **Synergy 6**



Electrical Connection
 220V/240V, 1 phase, 50 Hz.

Cable
 Units fitted with 2 metres of cable and 13 amp plug.

Refrigerant
 R404a CFC free refrigerant

Construction
 Top: Stainless Steel, Exterior: Stainless Steel,
 Interior: Stainless Steel

Designed for assisted service. Extra wide unit for maximum display area, with rear preparation shelf.

Gantry Features

- Constructed from 50mm diameter, bright polished stainless steel tube.
- Fluorescent illumination to stainless steel light box.
- Toughened glass curved front screen and over shelf hinged for easy cleaning.
- Glass side cheeks.
- One ambient glass mid-shelf
- Digital temperature control and readout.


Well Features

- 304 Stainless steel well - 170mm deep x 680mm wide.
- Load line indicator at 100mm to assist in the safe presentation of food
- Accepts containers up to 100mm deep.
- Completely removable well giving easy access for cleaning and maintenance.

Extras

- Polyethylene cutting board 600 x 250 x 40mm - Fits over rear preparation shelf.

Operating conditions
 Designed to comply with the operating requirements of EN ISO 23953 - 2:2005
 Performance level M1 (-1°C to + 5°C) in Climate class 3 (25°C, 60%RH,0.2m/s) and
 Performance level M2 (-1°C to + 7°C) in Climate class 4 (30°C, 55%RH,0.2m/s)

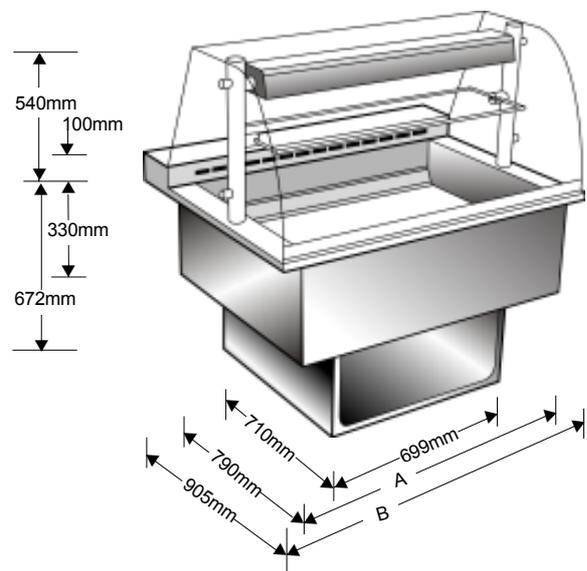

Product	GN1/1 Capacity	Part Number	cut out size (mm)	top size(mm)			power (W)	Approx. weight (kg)
				A	B	length x width x height		
Chilled Deep Display Deli	2	DRDD 2	725 x 796	708	850 x	905 x 540	1600	115
	3	DRDD 3	1045 x 796	1036	1177 x	905 x 540	1600	150
	4	DRDD 4	1370 x 796	1363	1504 x	905 x 540	2100	190