



# C-SERIES

## 1-SECTION COMPACT SOLID DOOR FORCED-AIR MEGA TOP PREP TABLE



|               |           |          |
|---------------|-----------|----------|
| Project Name: | Location: | AIA #:   |
| Item #:       | Qty:      | Model #: |
|               |           | SIS #:   |

### C-SERIES - STAINLESS STEEL EXTERIOR & INTERIOR



#### 27" WIDE MODELS

CLPT-2712-SD-R Hinged Right

CLPT-2712-SD-L Hinged Left

(-LK suffix indicates lock installed)

### SPECIFICATIONS

#### DIMENSIONAL DATA

|                                 |                  |
|---------------------------------|------------------|
| 1/6 Pans (top)                  | 12               |
| Length in.                      | 27-7/8 (70.8 cm) |
| Depth in.                       | 35-3/4 (90.8 cm) |
| Overall Height in. <sup>2</sup> | 44 (111.8 cm)    |

#### ELECTRICAL DATA

|                         |          |
|-------------------------|----------|
| Horsepower <sup>1</sup> | 1/5      |
| Amps                    | 2.4      |
| Voltage                 | 115/60/1 |
| NEMA                    | 5-15P    |

#### REFRIGERATION DATA


|                   |              |
|-------------------|--------------|
| Refrigerant       | R-290        |
| Charge Amount oz. | 2.5 (70.9 g) |
| BTU               | 1800         |

When ordering please specify:  
Voltage, Hinging, and Options



NEMA 5-15P

### PLAN VIEW

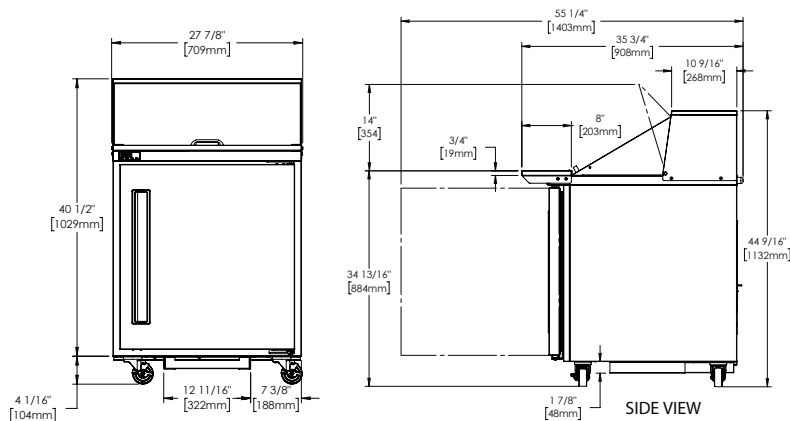

ELEVATION

SIDE VIEW

PAN LAYOUT

1. Based on 90°F ambient & 20°F evaporator.
2. Overall height includes 4" (10.2 cm) for casters.



Models listed to applicable UL, CSA, and NSF standards by an approved NRTL. Consult the factory or unit data plate for additional information.

Specifications subject to change without notice. Chart dimensions are rounded up to the nearest 1/16" (centimeters rounded up to the nearest tenth).



# C-SERIES

## 1-SECTION COMPACT SOLID DOOR FORCED-AIR MEGA TOP PREP TABLE



|               |           |          |
|---------------|-----------|----------|
| Project Name: | Location: | AIA #:   |
| Item #:       | Qty:      | Model #: |
|               |           | SIS #:   |

### REFRIGERATION SYSTEM

- Self-contained, rear-mounted system uses environmentally friendly, minimal GWP R-290 refrigerant
- Tested to NSF7 standards
- Front-breathing system allows zero-clearance installation
- High performance, balanced system operates at 32-41°F (0-5°C) to maintain consistent, food-safe temperatures
- Chambered, forced-air rail operation
- LED display for microprocessor control is water-resistant
- Capillary tube metering device

### CABINET CONSTRUCTION

- Stainless steel exterior and interior
- Insulated lid
- Exterior top, back, and bottom is constructed of heavy gauge galvanized steel
- Cabinet is insulated with an average of 2-3/8" (6.03 cm) thick high density, non-CFC foamed-in-place polyurethane
- Full access to pan rail for easy cleaning
- (12) 4" deep 1/6 size polycarbonate pans; rail accommodates up to 6" deep pans
- 8" (20.3 cm) deep, full-length, removable NSF-approved white polyethylene cutting board supplied standard
- A set of (4) 4" (10.2 cm) high casters; (2) with brakes, (2) without brakes; factory-installed
- 9' cord & plug provided

### DOOR

- Foamed-in-place, recessed handle
- Door is self-closing with a stay-open feature
- Magnetic, snap-in door gasket
- Gasket-protecting retainer
- Field-reversible
- -LK suffix following model number indicates door lock installed

### INTERIORS

- (2) adjustable, epoxy coated wire shelves per section supported on pilasters

### FIELD-INSTALLED OPTIONS

- Additional epoxy coated shelves on pilasters
- Single overshef, 27"W x 18"H x 16"D (CLUCACC-27OSHelf)
- Set of (4) 6" (15.2 cm) legs
- Set of (4) 6" (15.2 cm) casters
- Set of (4) 2-3/4" (7 cm) casters

### WARRANTY

- Six-year parts and labor warranty
- Seven-year compressor parts warranty



<https://traulsen.klccad.com>

|              |              |       |
|--------------|--------------|-------|
| Approved by: | Approved by: | Date: |
|--------------|--------------|-------|