

PROJECT:		
ITEM #		_ OTY:
MODEL #		
AIA #	SIS #	
$\neg \neg \neg$	515 #	

# **BOTTOM MOUNT GLASS DOOR DISPLAY REFRIGERATOR WITH ELECTRONIC LOCK**

LSR27HC-1-IQ



### **EXCLUSIVE WARRANTY**

- 7 Year Parts, Labor and Compressor
- Exclusive 2 Year Warranty On Magnetic Door Gaskets
- Lifetime Warranty On Handles & Hinges (parts only)



#### CABINET CONSTRUCTION

- Stainless Steel Exterior (galvanized back)
- **Aluminum Interior**
- Full Electronic Control
- · LED Lighting
- · High-Performance, Balanced, Bottom-Mounted Refrigeration
- Triple-Pane Glass Door
- Spring-Loaded Hinge With Stay-Open Door Feature For Easy Product Loading
- · One-Piece, Snap-In Magnetic Door Gasket
- Five (5) Heavy-Duty Epoxy Coated Shelves
- · 6" Overall Height Casters Standard
- 8' Cord And Plug (see electrical data for details)

#### **FEATURES**

Full Electronic Control

#### **ELECTRONIC LOCK FEATURES**

- Secure Temperature-Sensitive Product For Worry-Free Operation
- Automatically Locks When Power Loss Or Temperature Drop Is Sensed
- · Led Indicator To Quickly View Status
- · Easy-Access Test Switch For Health Inspectors
- · Built-In Safety Feature Allow Escape In Case Of Accidental Lock-In

#### REFRIGERATION

- Refrigeration System Uses R-290 Refrigerant To Comply With All Environmental Concerns
- Adaptive Defrost For Reduced Energy Consumption And More **Consistent Product Temperatures**
- **Epoxy Coated Evaporator Coil**
- Refrigerator Capable Of Maintaining Product Temperature 36°F To 38°F



Please Verify Qualifying Units By Visiting: www.energystar.gov/cfs

# 

## **OPTIONS & ACCESSORIES**

- · Stainless Steel, Black Or White Interior
- · Additional Shelves
- · Custom Color Cabinet

Rev 7/1/24 Printed in the U.S.A.

- · 3" Casters Or 6" Seismic Legs
- Door Swing Orientation (at time of order)

Remote Models\* (6" legs only) (refrigerant must be specified at time of order, see note on back page)


3779 Champion Blvd, Winston-Salem, NC 27105 ph: (888) 845-9800 fax: (800) 253-5168 

ΛΡΡΡΩ\/ΛΙ ·	DVIE-	



# LSR27HC-1-IQ



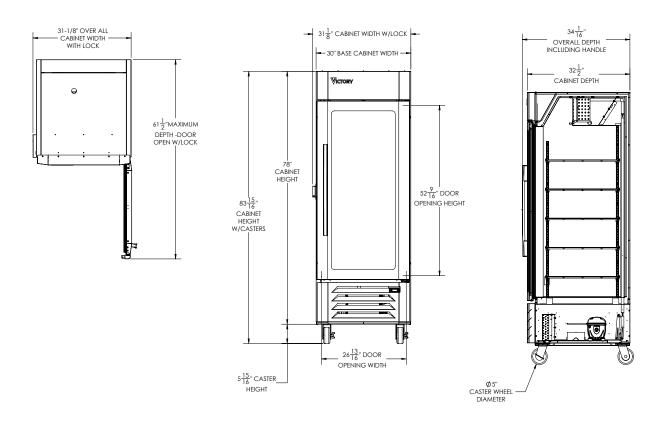

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

12" Top, 6" Bottom, 3" Sides & 3" Rear clearance is required

CHARACTERISTICS		ELECTRICAL DATA		SHIPPING DETAILS		
Net Capacity (cubic ft.)	26.17	Cabinet Voltage	115/60/1	Height	85"	
Width, Overall (with lock	31 1/8"	Total Amperes	3.0	Width	33"	
Depth, Overall (with handle)	34 1/16"	NEMA Plug (8' cord)	5-15P	Depth	36"	
Height Overall (with casters)	83 15/16"	REFRIGERATION DATA		Crated Weight	397 lbs	
Doors Open 90°	61 1/2"	Condensing Unit Size, HP	1/4			
Door Opening (in.)	26 13/16" x 52 9/16"	Refrigerant*	R-290	*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.		
No. Of Doors/Shelves	1/5	Capacity (BTU/HR) (100°F/20°F)	1479			
		Heat Rejection (BTU/HR)	2218.5			
		Charge (lbs/grams/ounces)	0.1985 / 90 / 3.18			

3779 Champion Blvd, Winston-Salem, NC 27105 | ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com VictoryRefrigeration.com

Rev. 7/1/24 Printed in the U.S.A.

