



APW Wyott uninsulated drop-in hot food wells are supplied with a UL Listed approved electrical kit includes an electrical conduit, control box and bezel or a UL Registered kit with thermostatic controls, pilot light and a 36" capillary.

Hot wells can be ordered with or without a drain and in energy efficient or high performance ratings.

The heating elements use a serpentine design to distribute heat evenly across the bottom of the well. Units are designed to be operated wet, not dry.

OPTIONS

- Wood mounting kit
- Stainless steel drain coupling
- Thermostat with 72" capillary (effective length 62")
- Recessed bezel

WARRANTY

All APW Wyott Food Wells are backed by a 1-year parts and labor warranty, including on-site service calls within 50 miles of authorized service technicians.

CERTIFICATIONS

Certified by the following agencies:




FEATURES AT A GLANCE

- 12" x 20" wells accommodate standard size steam table pans
- Uninsulated design
- Serpentine heating elements ensure even distribution of heat
- Well is constructed of stainless steel above countertop with aluminized outer housing below counter
- EZ-Lock system on all four exterior sides for easy installation
- Units shipped with drain are provided with stainless steel 1/2" NPT drain welded to bottom of pan provided with removable screen
- UL Listed approved electrical kit includes an electrical conduit, control box and bezel or a UL Registered kit with thermostatic controls, pilot light and a 36" capillary
- Large indicating pilot light
- Designed to be used wet

REQUIRED CLEARANCES

	Combustible
Left	? (? mm)
Right	? (? mm)
Back	? (? mm)

EQUIPMENT DIMENSIONS

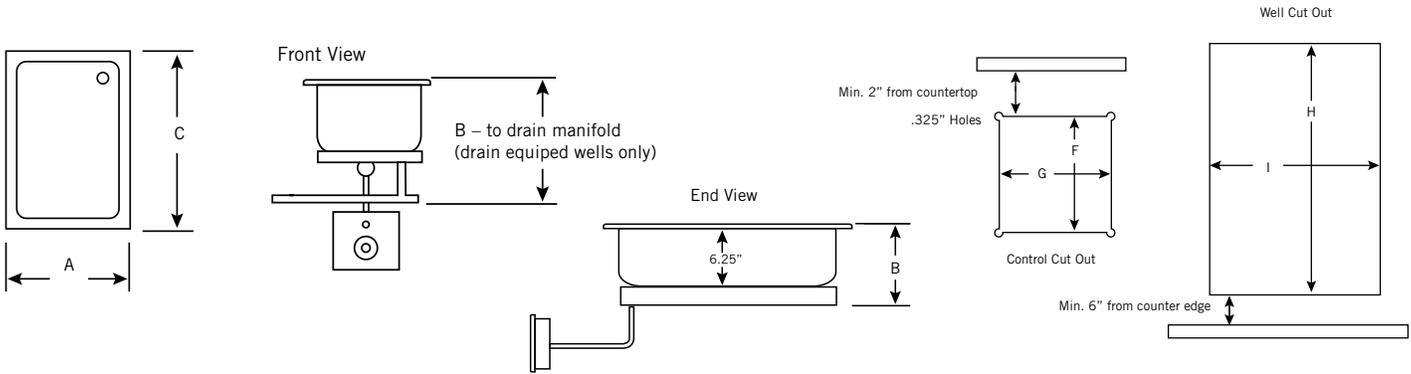

MECHANICAL SPECIFICATIONS

Model #	Volts	Watts	Amps	Overall Exterior Dimensions Width (A) x Height (B)* x Depth (C) (inches / mm)	Drain	Control Cutout Width (G) x Height (F)	Well Cutout Width (I) x Depth (H)	Ship Weight (lbs. / Kilos)
TM-90 UL	120	750	6.3	13.62" x 8.31" x 21.62" (346 x 211 x 549)	No	5.75" x 6.25"	12.75" x 20.75"	23 lbs. (10.43 kg)
	120	1,200	10	13.62" x 8.31" x 21.62" (346 x 211 x 549)	No	5.75" x 6.25"	12.75" x 20.75"	23 lbs. (10.43 kg)
	208	1,600	7.7	13.62" x 8.31" x 21.62" (346 x 211 x 549)	No	5.75" x 6.25"	12.75" x 20.75"	23 lbs. (10.43 kg)
	208/240	1,200/1,600	5.8/6.7	13.62" x 8.31" x 21.62" (346 x 211 x 549)	No	5.75" x 6.25"	12.75" x 20.75"	23 lbs. (10.43 kg)
	208/240/277	900/1,200/1,600	4.33/5/5.8	13.62" x 8.31" x 21.62" (346 x 211 x 549)	No	5.75" x 6.25"	12.75" x 20.75"	23 lbs. (10.43 kg)
TM-90D UL	120	750	6.3	13.62" x ?" x 21.62" (346 x ? x 549)	Yes	5.75" x 6.25"	12.75" x 20.75"	23 lbs. (10.43 kg)
	120	1,200	10	13.62" x ?" x 21.62" (346 x ? x 549)	Yes	5.75" x 6.25"	12.75" x 20.75"	23 lbs. (10.43 kg)
	208	1,600	7.7	13.62" x ?" x 21.62" (346 x ? x 549)	Yes	5.75" x 6.25"	12.75" x 20.75"	23 lbs. (10.43 kg)
	208/240	1,200/1,600	5.8/6.7	13.62" x ?" x 21.62" (346 x ? x 549)	Yes	5.75" x 6.25"	12.75" x 20.75"	23 lbs. (10.43 kg)
	208/240/277	900/1,200/1,600	4.33/5/5.8	13.62" x 8.31" x 21.62" (346 x ? x 549)	Yes	5.75" x 6.25"	12.75" x 20.75"	23 lbs. (10.43 kg)
TM-90	120	750	6.25	13.62" x 8.31" x 21.62" (346 x 211 x 549)	No	5.75" x 6.25"	12.75" x 20.75"	23 lbs. (10.43 kg)
	120	1,200	10	13.62" x 8.31" x 21.62" (346 x 211 x 549)	No	5.75" x 6.25"	12.75" x 20.75"	23 lbs. (10.43 kg)
	208	1,600	7.7	13.62" x 8.31" x 21.62" (346 x 211 x 549)	No	5.75" x 6.25"	12.75" x 20.75"	23 lbs. (10.43 kg)
	208/240	1,200/1,600	5.8/6.7	13.62" x 8.31" x 21.62" (346 x 211 x 549)	No	5.75" x 6.25"	12.75" x 20.75"	23 lbs. (10.43 kg)
	208/240/277	900/1,200/1,600	4.33/5/5.8	13.62" x 8.31" x 21.62" (346 x 211 x 549)	No	5.75" x 6.25"	12.75" x 20.75"	23 lbs. (10.43 kg)
TM-90D	120	750	6.25	13.62" x ?" x 21.62" (346 x ? x 549)	Yes	5.75" x 6.25"	12.75" x 20.75"	23 lbs. (10.43 kg)
	120	1,200	10	13.62" x ?" x 21.62" (346 x ? x 549)	Yes	5.75" x 6.25"	12.75" x 20.75"	23 lbs. (10.43 kg)
	208	1,600	7.7	13.62" x ?" x 21.62" (346 x ? x 549)	Yes	5.75" x 6.25"	12.75" x 20.75"	23 lbs. (10.43 kg)
	208/240	1,200/1,600	5.8/6.7	13.62" x ?" x 21.62" (346 x ? x 549)	Yes	5.75" x 6.25"	12.75" x 20.75"	23 lbs. (10.43 kg)
	208/240/277	900/1,200/1,600	4.33/5/5.8	13.62" x ?" x 21.62" (346 x ? x 549)	Yes	5.75" x 6.25"	12.75" x 20.75"	23 lbs. (10.43 kg)

UL Listed approved electrical kit includes an electrical conduit, control box and bezel or a UL Registered kit with thermostatic controls, pilot light and a 36" capillary

*Height on drain models include drain manifold. Add at least 6" below well for models with drains to accommodate drain manifold.