

HSM Series Heated Shelf Merchandiser

ALTO-SHAAM

Featuring exclusive Halo Heat® fanless technology, Alto-Shaam heated shelf merchandisers provide precise, even heating for the highest quality food and lowest cost of ownership.

The HSM holds a variety of grab-and-go products, including rotisserie chickens, pizza, sandwiches, and more. Improve store profits with hot, ready-to-eat meals. Convenient, fresh meals are displayed in an aesthetically pleasing, customizable merchandiser.

Experience better quality food with gentle, even and precise Halo Heat® fanless technology to keep food from drying out.

Flexibility to control individual shelf temperatures allows you to hold a variety of products at the proper temperature.

Boost impulse sales with LED-lighted shelves, backlit interchangeable graphics, and pricing rails.

Simple operation and easy cleaning keeps delis and grab-and-go areas operating smoothly.

Lowest cost of ownership on the market – cost savings of 50% compared to traditional models.

Easy-to-load shelves – pass-through option available for added convenience.

Made in the USA with a commitment to quality. Alto-Shaam is ISO 9001:2015-certified.

Standard Features

- Adjustable thermostat with a heat-on indicator light
- Latched access panel on the front of the merchandiser
- Four (4) 3" (76mm) casters

Capacity



- 16** **HSM-24/4S:** Four (4) 20-7/8" (530mm) width shelves, four (4) chicken boats with dome cover per shelf.
- 24** **HSM-36/4S:** Four (4) 32-7/8" (835mm) width shelves, six (6) chicken boats with dome cover per shelf.
- 40** **HSM-48/4S:** Four (4) 44-7/8" (1140mm) width shelves, ten (10) chicken boats with dome cover per shelf.



| | | |
|-------------------|----------------|-------------------------|
| HSM-24/4S: | 64 lb (29 kg) | 16 lb (7 kg) per shelf |
| HSM-36/4S: | 96 lb (44 kg) | 24 lb (11 kg) per shelf |
| HSM-48/4S: | 160 lb (73 kg) | 40 lb (18 kg) per shelf |



HSM-36/4S

Images include optional accessory signage panels

HSM-24/4S

Configurations (select one)

Models

- ☐ HSM-24/4S
- ☐ HSM-36/4S
- ☐ HSM-48/4S (not shown)

Electrical

- ☐ 208-240V, 1PH

Style

- ☐ Reach-in
- ☐ Pass-through

Door Options

- ☐ None (reach-in models only)
- ☐ Rear slide (pass-through models only)
- ☐ Rear swing (pass-through models only)
- ☐ Front swing (reach-in and pass-through models)

Casters or Legs

- ☐ 3" (76mm) casters for floor standing application (Standard)
- ☐ 6" (152mm) feet for floor standing application (FE-27153)

Accessories (select all that apply)

Unit ships without graphics unless selected

- ☐ Signage panel, POP Display
- ☐ Signage panel, shelf – Rotisserie Chicken
- ☐ Signage panel, shelf – Hot Sandwiches
- ☐ Signage panel, shelf – Barbecue Ribs
- ☐ Signage panel, shelf – Hot & Tasty
- ☐ Signage panel, shelf – Grab & Go
- ☐ Signage panel, shelf – Hot & Fresh

qty

| |
|--|
| |
| |
| |
| |
| |
| |

Shelf insert for magnetic signage panels

Magnetic signage panels to be provided by customer.

- | | |
|---|---|
| HSM-24 - <input type="checkbox"/> Stainless Steel (1027304) | <input type="checkbox"/> Black (PE-46057) |
| HSM-36 - <input type="checkbox"/> Stainless Steel (1027305) | <input type="checkbox"/> Black (PE-46058) |
| HSM-48 - <input type="checkbox"/> Stainless Steel (1027306) | <input type="checkbox"/> Black (PE-46059) |




Wire shelf

- ☐ HSM-24 (SH-46066)
- ☐ HSM-36 (SH-46067)
- ☐ HSM-48 (SH-46068)

HSM Series Heated Shelf Merchandiser



Dimension Drawings

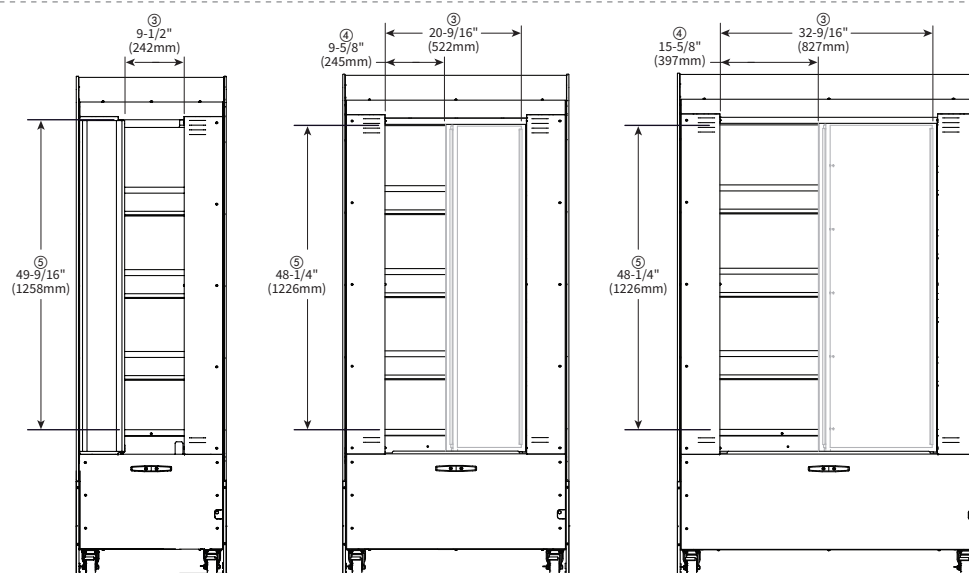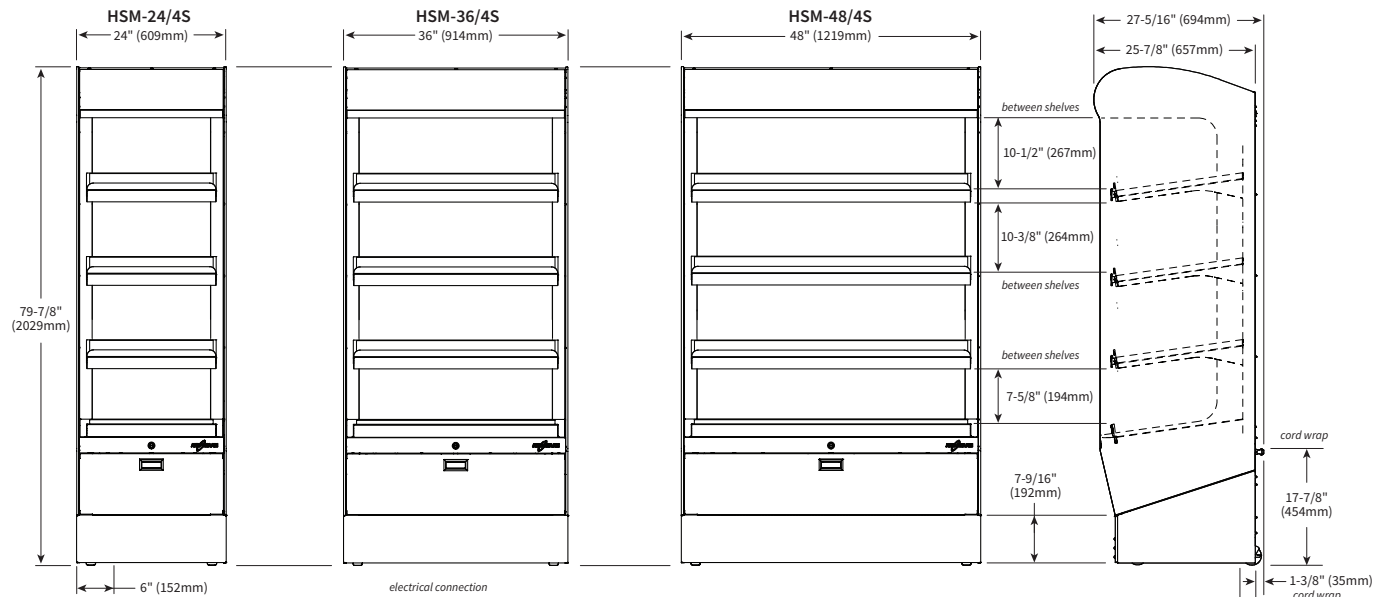

Shelf Dimensions (W x D)
① = Overall ② = Heated Surface


HSM-24/5S
① 20-7/8" x 20-1/2" (530mm x 521mm)
② 19-7/8" x 19-1/2" (505mm x 495mm)

HSM-36/5S
① 32-7/8" x 20-1/2" (835mm x 521mm)
② 31-7/8" x 19-1/2" (810mm x 495mm)

HSM-48/5S
① 44-7/8" x 20-1/2" (1140mm x 521mm)
② 43-7/8" x 19-1/2" (1114mm x 495mm)

Pass-Through Maximum Openings

- ③ = Horizontal (swing doors)
- ④ = Horizontal (slide doors)
- ⑤ = Vertical

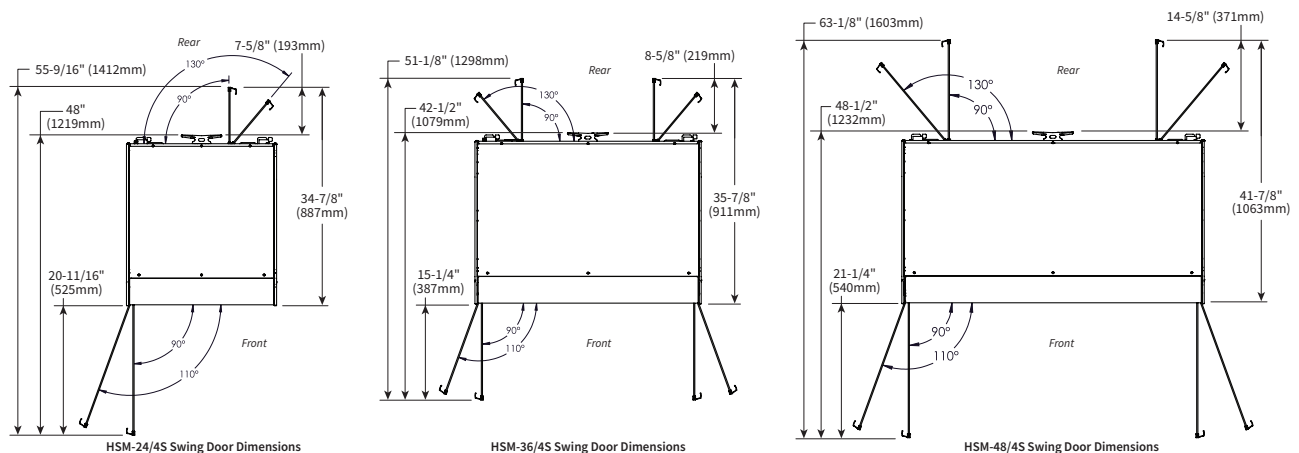

HSM Series Heated Shelf Merchandiser



Specifications



CHECK FIRST

- Merchandiser must be installed level.
- Merchandiser must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.
- In order to maintain NSF standards, floor models must be equipped with casters or 6" (152mm) legs.



CLEARANCE

Rear: 4" (102mm)

Recommended: 18" (457mm) for service access. Charges in connection with inadequate service access is not covered under warranty.



DIMENSIONS

Model

| | |
|-----------|--|
| HSM-24/4S | 79-7/8" x 24" x 27-5/16" (2029mm x 609mm x 694mm) |
| HSM-36/4S | 79-7/8" x 36" x 27-5/16" (2029mm x 914mm x 694mm) |
| HSM-48/4S | 79-7/8" x 48" x 27-5/16" (2029mm x 1219mm x 694mm) |

Exterior (H x W x D)

Net Weight

| |
|-----------------|
| 395 lb (179 kg) |
| 485 lb (220 kg) |
| 555 lb (252 kg) |

Ship Dimensions (L x W x H)*

| | | |
|-----------|--|-----------------|
| HSM-24/4S | 36" x 36" x 84" (914mm x 914mm x 2134mm) | 490 lb (222 kg) |
| HSM-36/4S | 56" x 45" x 87" (1422mm x 1143mm x 2210mm) | 586 lb (266 kg) |
| HSM-48/4S | 56" x 63" x 89" (1422mm x 1600mm x 2261mm) | 690 lb (313 kg) |

Ship Weight*


*Domestic ground shipping information. Contact factory for export weight and dimensions.



ELECTRIC

| | V | Ph | Hz | A | kW | Plug Configuration |
|-----------|-----------|----|----|-------------|-----------|------------------------|
| HSM-24/4S | 208 – 240 | 1 | 60 | 8.7 – 10.0 | 1.8 – 2.4 | NEMA 6-20P (20A, 250V) |
| HSM-36/4S | 208 – 240 | 1 | 60 | 11.6 – 13.3 | 2.4 – 3.2 | cord, no plug |
| HSM-48/4S | 208 – 240 | 1 | 60 | 15.5 – 17.9 | 3.2 – 4.3 | cord, no plug |

NEMA 6-20P



CE IP X4

CONTACT US

W164 N9221 Water Street | Menomonee Falls, Wisconsin 53051 | U.S.A.
Phone: 262.251.3800 | 800.558.8744 U.S.A./Canada | Fax: 262.251.7067 | alto-shaam.com