

# STEAKHOUSE PLUS GRILL

## G1528



G1528

### DESCRIPTION

High performance grill heated by a powerful, infra-red burner system providing fast initial heat up and recovery time. Ideal for busy kitchens.

Double-cased, insulated body provides improved heat retention. Cast inner sides offer 5 variable cooking positions.

Twin heat controls allow only one half of the chamber to be used when full loads are not required.

### FEATURES and BENEFITS

- Heavy duty infra-red burner system
  - *cope with no-stop throughput in busy kitchens*
- Twin heat control
  - *no need to heat entire chamber during quieter periods*
- Variable brander height
  - *allows food to be cooked at preferred position*
- Supplied with aluminium brander, grid shelf and drip tray
  - *as standard, no need to purchase as extras*
- Various mounting options available
  - *Floor stand, wall bracket or bench legs*

### OPTIONAL ACCESSORIES

- Floor stand
- Wall bracket
- Bench legs
- Brander (additional)
- Grid shelf (additional)

### VENTILATION

Adequate ventilation, whether natural or mechanical, must be provided to supply sufficient fresh air for combustion and to allow easy removal of such products that may present risk to health. Recommendations for ventilation of appliances are given in BS5440:2 and HVCA specification DW/172. For multiple installations, requirements for individual appliances should be added together. Installation of any such system must be completed in accordance with local and/or national regulations that apply at time of commissioning

### SITING

Install level in a well-lit and draught-free position. All round clearance of 150mm is necessary from any combustible wall or object liable to damage from overheating. Minimum vertical clearance of 550mm in still air above flue top edge is necessary to ensure overlying surfaces do not overheat. Minimum clearance of 400mm from any adjacent wall at RH side is needed to allow removal of panel for service access. LH side will become very hot. Position to minimise risk of accidental touching. Unit can be also mounted upon non-combustible bench legs, floor stand or wall brackets, never directly upon a table top.






# STEAKHOUSE PLUS GRILL

G1528 model

## MODEL DIMENSIONS (in mm)

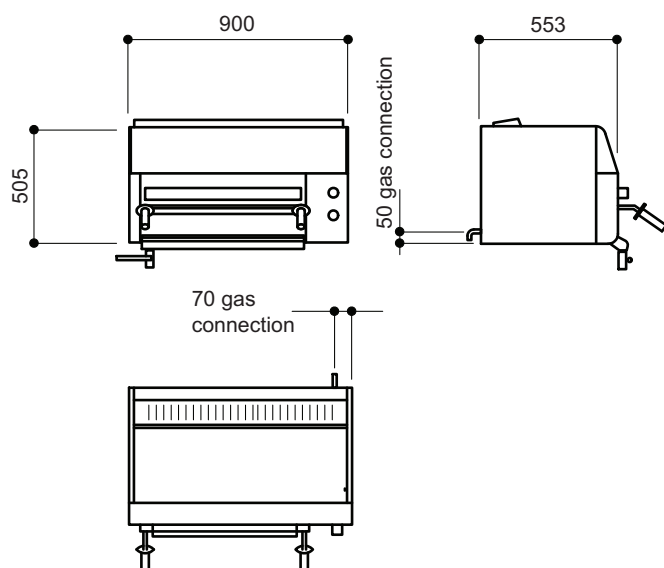

## SPECIFICATION DETAILS

\* ratings are gross values

### **G1528**

|                               |          |
|-------------------------------|----------|
| Gas rating * (kW)             | 14.5     |
| Gas rating * (btu/hr)         | 49,500   |
| Gas inlet (Natural/Propane)   | 1/2" BSP |
| Gas pressure - Natural (mbar) | 16       |
| Gas pressure - Propane (mbar) | 37       |
| Weight (kg)                   | 82       |
| Packed weight (kg)            | 88       |