



POTATO PEELER-SALAD DRIER PES-20 230/50/1

2 in 1: potato peeler & salad dryer



1000671



FEATURES AND BENEFITS

- ✓ Potato peeler manufactured in stainless steel.
- ✓ Aluminium base plate lined with silicon carbide abrasive (approved by NSF), easily removable for cleaning purposes.
- ✓ Water inlet system with non-return air break.
- ✓ Watertight controls (IP65).
- ✓ Lifiable cover.
- ✓ As salad dryer:
- ✓ Capacity: 2 Kg per cycle (20 Kg/h).
- ✓ Volume: 19.5 litres.

SALES DESCRIPTION

As potato peeler: 20 Kg load per cycle.

As salad dryer: 2 Kg load per cycle (20 Kg/h) capacity.

INCLUDES

- ✓ Abrasive plate.
- ✓ Drying basket.

ACCESSORIES

- Knife plate for PES-20
- Stands for potato peelers
- Filters for potato peelers
- Plastic Basket set



www.sammic.co.uk
 Food Service Equipment Manufacturer
 Unit 2, Trevanah Road
 Troon Industrial Park
 LE4 9LS - Leicester
 uksales@sammic.com
 Tel.: +44 0116 246 1900



Project	Date
Item	Qty
Approved	

DYNAMIC PREPARATION
COMMERCIAL SALAD SPINNERS

product sheet
updated 12/03/2020



POTATO PEELER-SALAD DRIER PES-20 230/50/1

2 in 1: potato peeler & salad dryer



1000671

SPECIFICATIONS

Peeler function

- ✓ Hourly production: 0 Kg / 300 Kg
- ✓ Capacity per load: 20 Kg
- ✓ Equipment: abrasive plate: 1

Draining function

- ✓ Drainer hourly production: 20 Kg
- ✓ Production/hour (salad spinner): 19.5 l
- ✓ Draining basket: 1

General features

- ✓ Timer (min-max): 0 ' - 6 '
- ✓ Total loading: 550 W
- ✓ Electrical supply: 230 V / 50 Hz / 1 ~ (3.5 A)
- Plug: -

External dimensions (WxDxH)

- ✓ Width: 433 mm
- ✓ Depth: 635 mm
- ✓ Height: 786 mm

External dimensions with stand



- ✓ Width with stand: 433 mm
- ✓ Depth with stand: 638 mm
- ✓ Height with stand: 1155 mm

Net weight: 42 Kg

Crated dimensions

670 x 470 x 930 mm

Gross weight: 48.4 Kg.

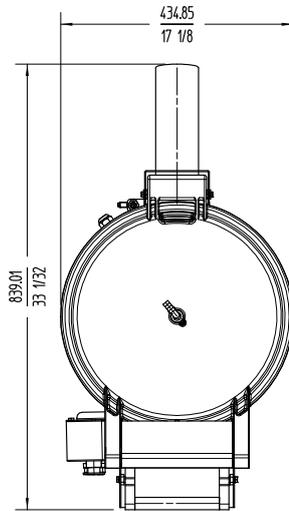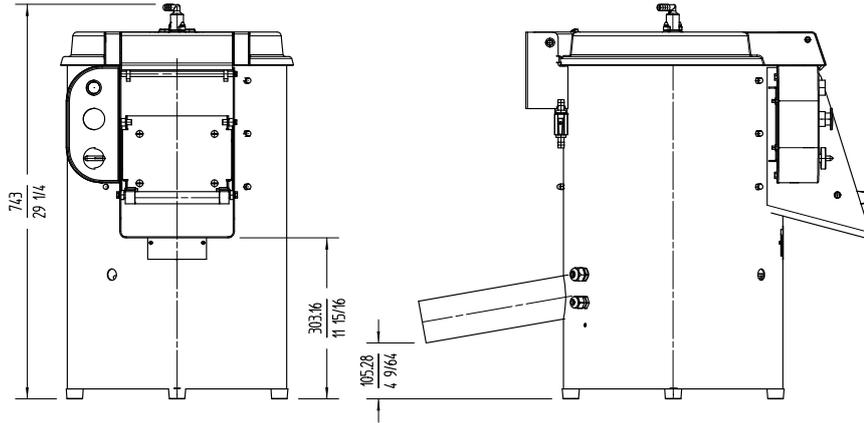

DYNAMIC PREPARATION
COMMERCIAL SALAD SPINNERS



www.sammic.co.uk

Food Service Equipment Manufacturer

Unit 2, Trevanah Road
Troon Industrial Park
LE4 9LS - Leicester

uksales@sammic.com
Tel.: +44 0116 246 1900



Project

Date

Item

Qty

Approved

product sheet
updated 12/03/2020