


Synergy refrigerated display deck - Flat glass sneeze screen

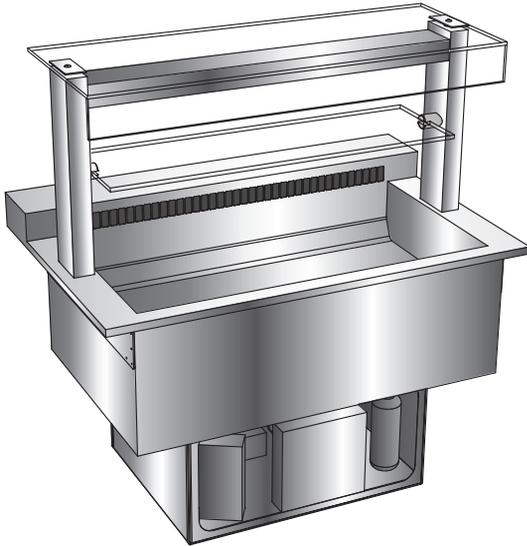

Model No: **SSRDK2** - 2 x GN1/1 size

Model No: **SFRDK3** - 3 x GN1/1 size

Model No: **SFRDK4** - 4 x GN1/1 size

Model No: **SFRDK5** - 5 x GN1/1 size

Dimensions

Model ----- Top size ----- Cut out size -- loading
SSRDK2 -- 850 x 755 x 540mm high -- 725 x 646mm - 1.6kW
SSRDK3 - 1177 x 755 x 540mm high - 1045 x 646mm - 1.6kW
SSRDK4 - 1504 x 755 x 540mm high - 1370 x 646mm - 2.1kW
SSRDK5 - 1831 x 660 x 540mm high - 1700 x 646mm - 2.4kW

Electrical Connection: 220V/240V, 1 phase, 50 Hz.

Refrigerant: R404a CFC free refrigerant

Cable: Units fitted with 2 metres of cable and 13 amp plug.

Construction: Top:-Stainless Steel, Exterior- Stainless Steel, Interior: Stainless Steel

Operating conditions

Designed to comply with the operating requirements of EN ISO 23953 - 2:2005
Performance level M1 (-1°C to + 5°C) in Climate class 3 (25°C, 60%RH,0.2m/s) and
Performance level M2 (-1°C to + 7°C) in Climate class 4 (30°C, 55%RH,0.2m/s)

Product Features

Designed for assisted service. With rear preparation shelf.

Gantry Features

- Constructed from bright polished stainless steel
- LED illumination to stainless steel light box.
- Toughened flat glass sneeze screen and over shelf
- One ambient glass mid-shelf
- Digital temperature control and readout.

Well Features

- 304 Stainless steel well - 170mm deep
- Load line indicator at 100mm to assist in the safe presentation of food
- Accepts GN1/1 gastronorm containers up to 100mm deep.
- Completely removable well giving easy access for cleaning and maintenance.

Extras

- Polyethylene cutting board 600 x 250 x 40mm - Fits over rear preparation shelf.

Victor are committed to a policy of continuing product development and innovation and as such, we reserve the right to change product specifications without prior notice.