



DUKERS
Quality Commercial Refrigeration

Item # _____

Qty # _____

Model # _____

Project # _____



Thermostatic Griddle DCGT48



- ✦ Stainless steel exterior and interior.
- 🔥 26,000 BTU Burners per 12" section with standby pilots.
- 🕒 Independent Thermostatic controls every
- 🌡️ Temperature range 250 °F - 500 °F.
- 🍳 Heavy duty 1" thick polished steel griddle plate.
- 📏 Each griddle is shipped with Standard Natural Gas, LP conversion kit.
- 📏 Adjustable stainless steel legs come standard, allowing the equipment height to be adjusted from a low of 15 1/4" to a maximum of 17 5/8".
- 🧼 Full length seamless drip pan, easy to remove and clean.



**HIGH QUALITY
STAINLESS STEEL &
ROBUST DESIGN**

* All measures are presented in Inches

GRIDDLE
MODEL

DIMENSION

Width Depth Height

DCGT48

48 in

28 1/2 in

15 1/4 in



DUKERS

Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

📞 1-800-931-8628


@ info@dukersusa.com

www.DukersUSA.com

DETAILS & SPECIFICATIONS

GRIDDLE DCGT48


Front View

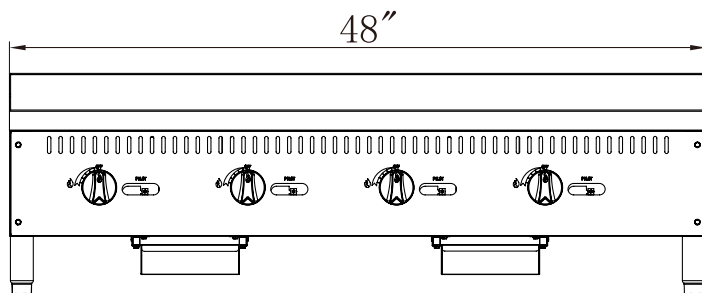


DCGT 48

GAS SOURCE	NG/Propane
WORK AREA	47 7/8" X 20 1/2"
BURNER	4 count
SINGLE BURNER	26000 BTU/H
COMBINED	104000 BTU/H
GAS PRESSURE	NG: 4 "WC Propane: 10 "WC
NOZZLE	NG: 41# Propane: 53#
CONTAINER FITMENT	250

Top View

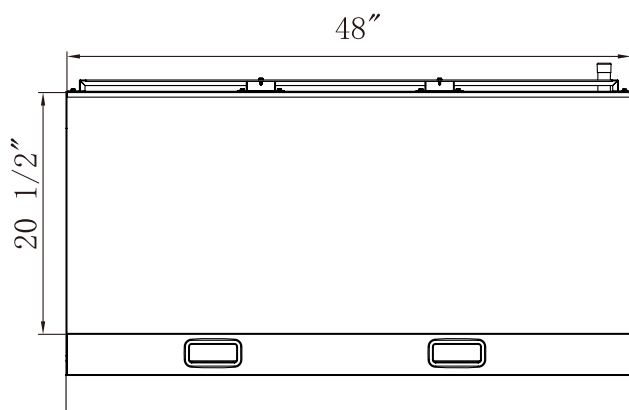

Side View

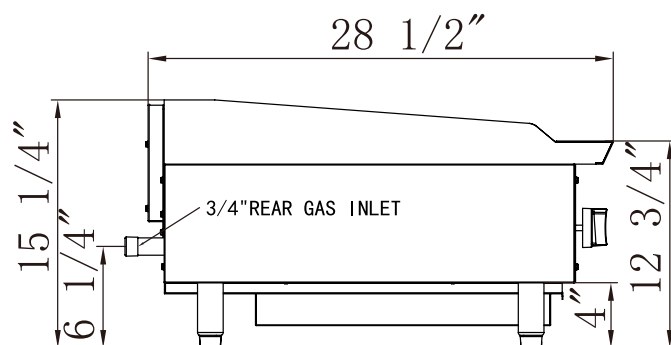

Model	Packaging Dimensions (inches)			Net Weight (lbs)	Ship Weight (lbs)
	W	D	H		
DCGT48	50 1/4"	32 5/8"	18 7/8"	349	420



Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

1-800-931-8628

@info@dukersusa.com

www.DukersUSA.com