

WastePro II

Dewaterer



Model: WastePro II

Description:
Food Waste
Dewaterer

Part no: F78/020 Righthand discharge /
F78/030 Lefthand discharge

Features:
Self Cleaning
Processing capacity of up to 700kg of food
waste per hour.
Intelligent electronic sensor – Detects when
bin is both in position and full.

- WastePro II from IMC removes excess liquid from macerated food waste through centrifugal action, reducing the volume of the waste by up to 80%.
- The grey water is dispensed direct to drain whilst the solid fraction is captured in a wheeled bin for subsequent onward processing.
- WastePro II can be connected to a suitable existing waste disposer in either stand alone or trough configuration.
- WastePro II is ideal in instances where food waste cannot be disposed of via mains drainage, either due to technical restrictions or legal regulations.
- The flexibility of WastePro II provides a cost effective system for almost all commercial and institutional kitchens.

Food Waste to Resource


imc

Specification

Model	WasteStation	Connections	
Covers / kgs per hour	1850/900	To drainage (mm)	54
Voltage	380-415	No. of feet	5
kW / Phase	1.1 / 3	Electrical supply & Operation	
Water (litres per cleaning cycle) Soft /Hard water	14	Voltage range: Worldwide voltage on request	
Energy Cost (typical per day)	£0.17	Phase (4 wire) supply	3
Measurements - WasteStation		Frequency (Hz)	50/60
Length (mm)	980mm	Amps (max)	7
Width (mm)	450mm	Supply Amps (suggested)	16A
Height (mm)	825mm	Decibel (dB) during operation	60dB
Weight	84kg		



Technical Specification

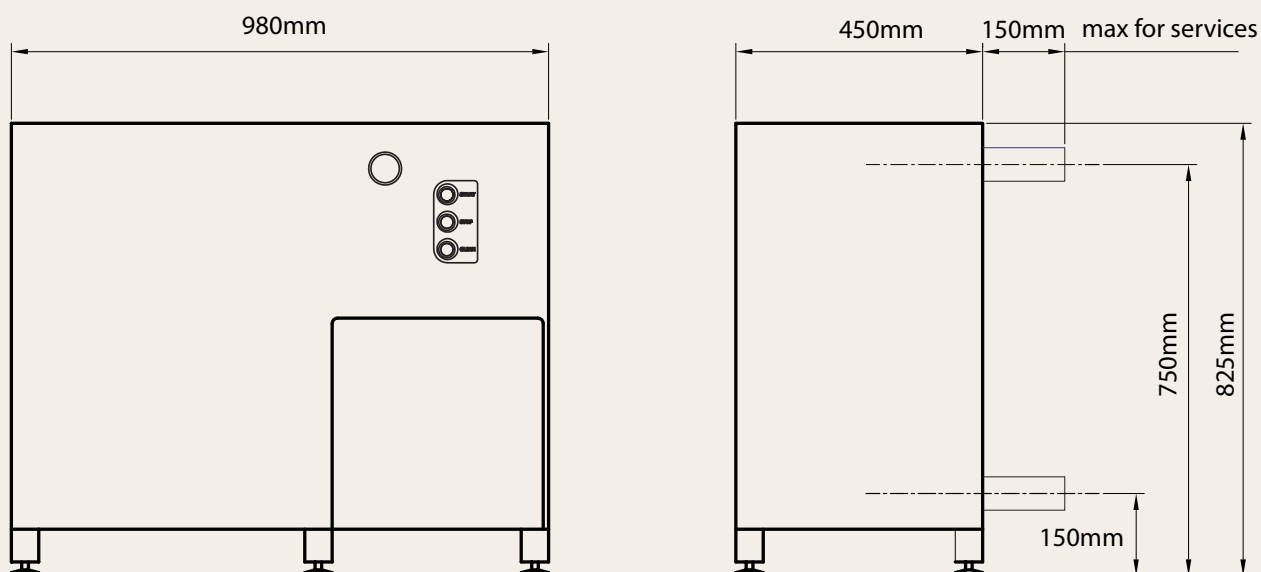

Imperial Machine Company Limited

Unit 1 Abbey Road, Wrexham Industrial Estate
 Wrexham LL13 9RF United Kingdom
 Tel: +44 (0)1978 661155 Fax: +44 (0)1978 729990
 Email: sales@imco.co.uk Web: www.imco.co.uk

Food Waste to Resource

