

# VSR27A-8/48A-12

## Sandwich Top 27"/ 48" Prep Refrigerator

VALIANCE<sup>®</sup>  
by  HOSHIZAKI

VSR27A-8/48A-12  
05/12/25  
Item #13738

### W x D x H

26.75" x 30.13" x 40.69"  
(including 4" casters)

### W x D x H

47.75" x 30.13" x 40.69"  
(including 4" casters)



## FEATURES

- Engineered to maintain NSF-7 temperatures at 100°F ambient.
- Environmentally friendly R290 hydrocarbon refrigerant
- Prep-guard helps to prevent mess from dropping into the cabinet
- Stay-open door(s) is field reversible - no kit needed
- Stainless steel interior floor with aluminum sides, rear, and top
- Provided with full complement of polycarbonate plastic 1/6th size pans, 4" deep
- Time initiated automatic defrost
- Energy efficient heated condensate removal
- Heavy duty grey epoxy coated shelves are adjustable in 1/2" increments; 105 lbs. capacity
- Standard with 4" casters (two with brakes)
- 9 ft. cord and plug

### Dimensions / Capacity

|                                       | One Section<br>VSR27A-8 | Two Section<br>VSR48A-12 |
|---------------------------------------|-------------------------|--------------------------|
| Interior Storage Capacity (CF) (AHAM) | 6.33 ft <sup>3</sup>    | 12.09 ft <sup>3</sup>    |
| Overall Width x Depth                 | 26.75" x 30.13"         | 47.75" x 30.13"          |
| Height (including 4" casters)         | 40.69"                  | 40.69"                   |
| Door Opening (W x H)                  | 22.75" x 22.88"         | 19.75" x 22.88"          |
| Depth with Door Open at 90°           | 54.76"                  | 51.76"                   |
| Adjustable Shelves                    | 1                       | 2                        |
| Shelf Dimensions (W x D)              | 22" x 16"               | 21.25" x 16"             |
| Crated Shipping Weight                | 200 lbs.                | 290 lbs.                 |
| Crated Length x Depth x Height        | 34.5" x 29.13" x 45.5"  | 52.13" x 34.5" x 45.5"   |

### Electrical / Refrigeration

|                                      | One Section<br>VSR27A-8 | Two Section<br>VSR48A-12 |
|--------------------------------------|-------------------------|--------------------------|
| Voltage                              | 115/60/1                | 115/60/1                 |
| HACR Breaker                         | 15.0 Amps               | 15.0 Amps                |
| Electrical Connection (NEMA)         | 5-15P ⚡                 | 5-15P ⚡                  |
| Voltage Range                        | 103-127                 | 103-127                  |
| Ambient Temp. Range                  | 45° to 100°F            | 45° to 100°F             |
| Control Setpoint Range               | 32.5° to 36.5°F         | 32.5° to 36.5°F          |
| Amperage                             | 2.1                     | 3.3                      |
| Energy Consumption (kWh/day) @ASHRAE | 1.89                    | 2.16                     |
| Approx. Nominal Compres. BTU/HR (HP) | 1461(1/6)               | 2130(1/6)                |
| Refrigerant / Charge Amount (oz.)    | R290 / (2.1oz)          | R290 / (2.5oz)           |

### Warranty

3 Year - Parts on entire machine.  
4 Year - Labor on entire machine.  
5 Year - Parts on Compressor

Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

We reserve the right to change specifications without notice.

# VSR27A-8/48A-12


Sandwich Top 27"/ 48" Prep Refrigerator

VALIANCE®


by  HOSHIZAKI

VSR27A-8/48A-12  
05/12/25  
Item #13738

## FRONT VIEW

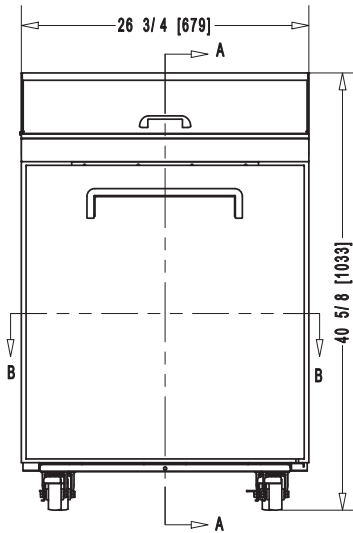


VSR27A-8

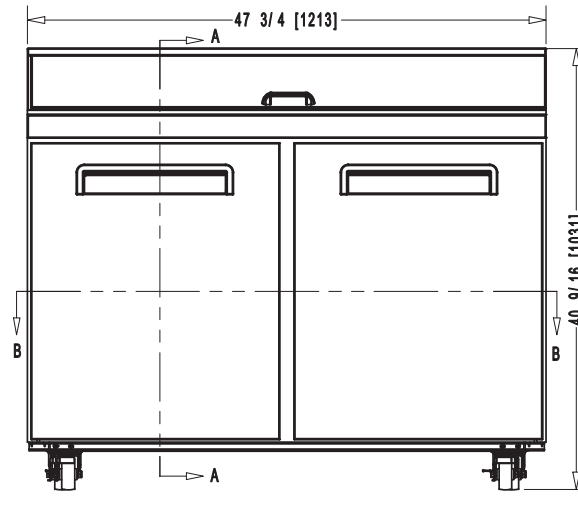


VSR48A-12

## PLAN VIEW

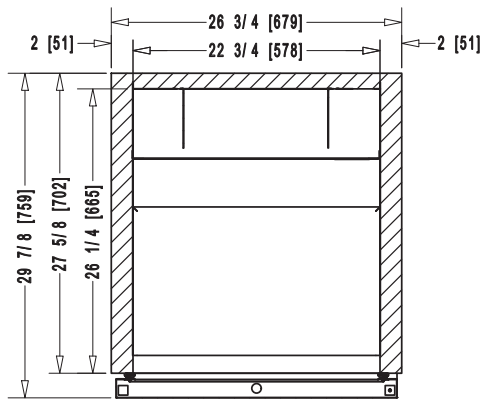


VSR27A-8

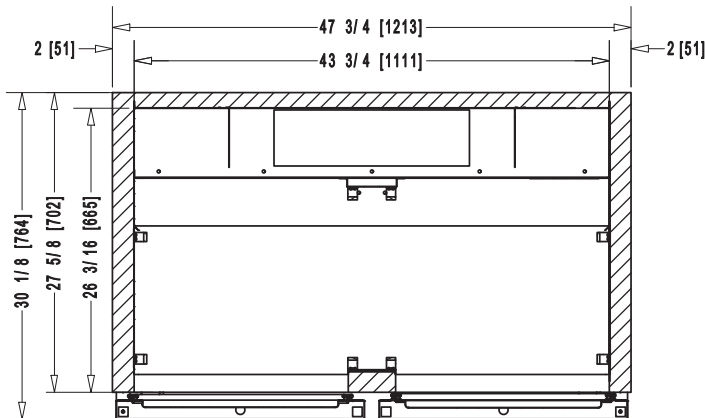


VSR48A-12

## SIDE VIEW

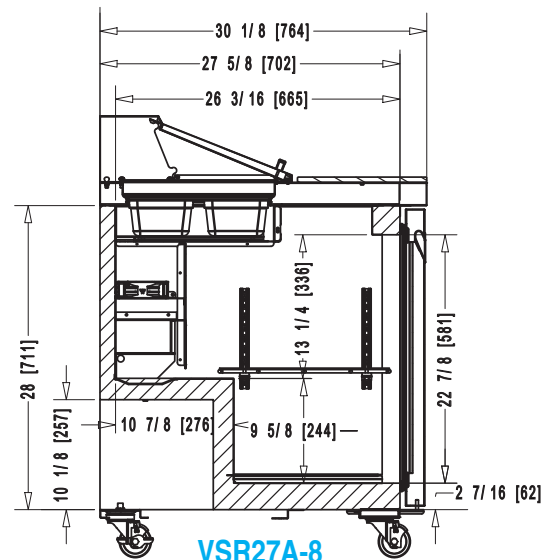

VSR27A-8

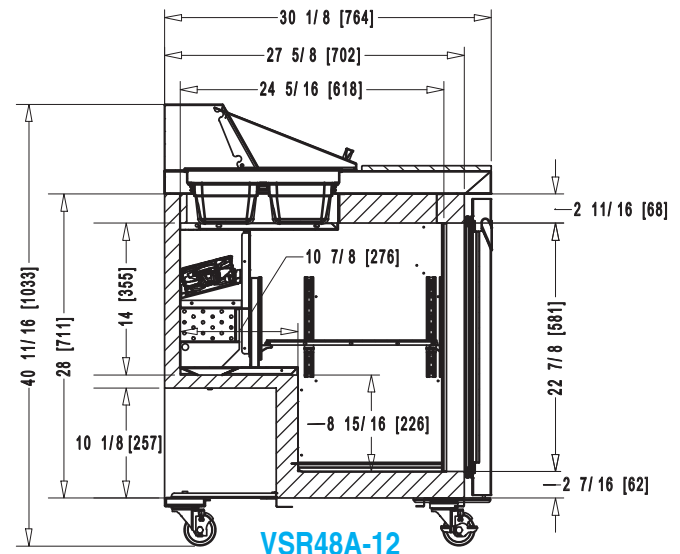

VSR48A-12