Catalogue
FOOD SERVICE
Chapter
COOKING

Specific model
CAG-1132 LPG 50-60 Hz 380-415V 3N

19084248 22/11/2021

DENOMINATION:

Automatic cooker directly heated with gas 1 tank of 132 L

DESCRIPTION :

"- Well fully made from AISI-316 satin stainless steel.
- AISI-316 satin stainless steel baskets.
- Overflow and tap for output and drainage.
- AISI-304 stainless steel cover with a thickness of 15/10, fitted with a steel zip with preloading springs and an athermic handle.
- Gauge for controlling pressure inside the double wall.
- Manual air escape valve for depressurising the air produced in the double wall during the heating process.
- Adjustable chromed bronze mixer with hot and cold water.
- Weight safety valve set to 0.5 bar.
- Stainless steel supporting structure with a thickness of 20/10 fitted on stainless steel feet that can be adjusted between 150 mm and 180 mm.
- AISI-304 satin stainless steel external walls with a thickness of 10/10.
- AISI-304 stainless steel satin shelf with a thickness of 15/10.
- Fitted with digital controls with 3 displays showing 4 numbers, enabling the temperature to be adjusted between 20 °C and 110 °C.
- Possibility to change amount of time the basket is submerged, with a minimum interval of 1 second.
- Acoustic illuminated indicator to inform of the end of the cooking cycle.
- Cooking shut-off with time delayed water reintegration at the end of cooking.
- Automatic raising of the basket at the end of cooking.
- Possibility to manage the position of the basket: first drip and then unload or direct front unload."

DIMENSIONS



X Width	900	mm	X Gross width	1010	mm
Y Depth	900	mm	Y Gross depth	930	mm
Z Height	850	mm	Z Gross height	1430	mm
Net Weight	195,0	kg	Gross Weight	245,0	kg
Net volume	0,689	m3	Gross volume	1,343	m3



Catalogue
FOOD SERVICE

Capítulo
COOKING

Modelo
CAG-1132 LPG 50-60 Hz 380-415V 3N

19084248 22/11/2021

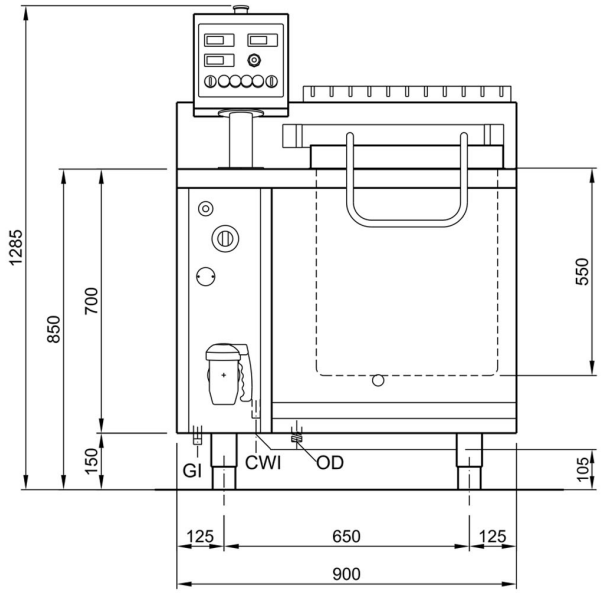

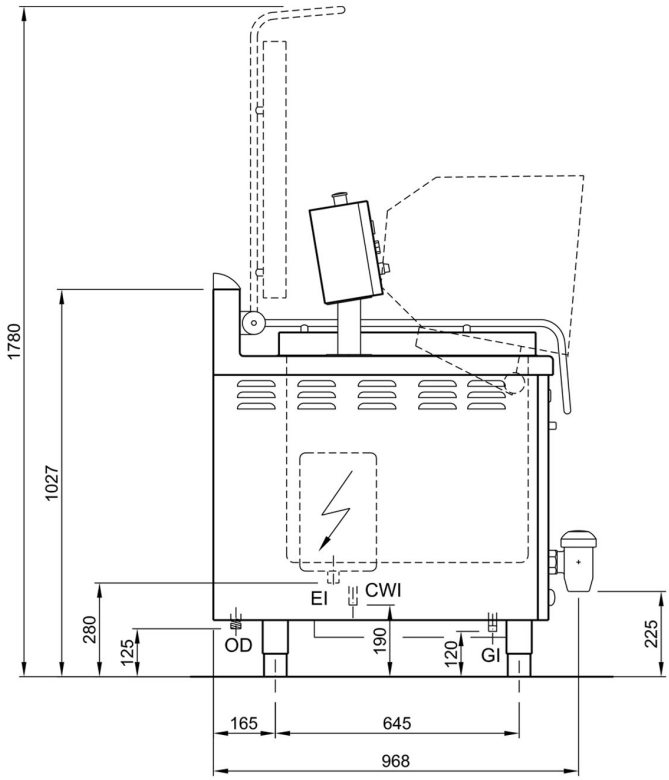

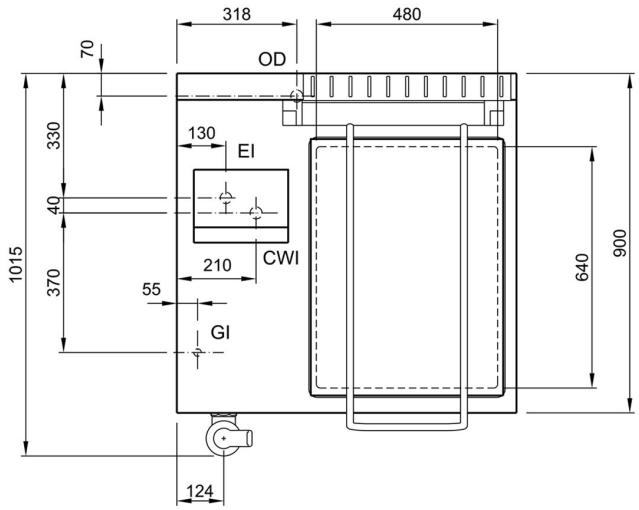

ALLACCIAMENTI - BRANCHEMENTS - CONNECTIONS

CWI -	ACQUA FREDDA EAU FROIDE COLD WATER	100 - 250 kPa (1 - 2,5 bar)	1/2" F
OD -	SCARICO TROPPOPIENO DECHARGE TROP-PLEIN OVERFLOW DRAIN		1-1/4" M
GI -	ARRIVO GAS ENTREE GAZ GAS INLET	24 KW	1/2" ISO 7/1 R1
EI -	CAVO ELETTRICO CABLE ELECTRIQUE ELECTRIC CABLE	(STANDARD) - 380-415V 3N 50-60Hz 0,10kW (OPTIONAL) - 220-240V 3 50-60Hz 0,10kW (OPTIONAL) - 220-240V 1N 50-60Hz 0,10kW	